

KAMAYA

ELECTRONIC COMPONENTS CATALOG

Products Guide

2014

<http://www.kamaya.co.jp>

Chip product situation for environment

November, 2013

The reduction of the environmental hazardous materials(ex:Halogen,Antimony) of all chip product is promoted in KAMAYA now.

Products	RoHS	Pb free (Pb≤1000ppm)	Halogen free (Cl or Br≤900ppm & Cl+Br≤1500ppm)	Antimony free (Sb ₂ O ₃ ≤900ppm)
Chip resistors				
[General] RMC Series	○	×	○	○
[General] RGC Series	○	×	○	○
[General] RNC Series	○	○	○	○
[Anti-Sulfuration] RMNW Series	○	×	○	○
[Anti-Sulfuration] RMAW Series	○	×	○	○
[High Voltage] RVC Series	○	×	○	○
[High Voltage] RZC Series	○	×	○	○
[Surge] RPC Series	○	×	○	○
[Trimable] FCR Series	○	×	○	○
[Sensing] RLC Series	○	×	○	○
[Sensing] RLP Series	○	○	○	○
[Sensing] RCC Series	○	○	○	○
[Sensing] RHC Series	○	×	○	○
Chip Network				
[Chip Network] RAC Series	○	×	○	○
Chip Fuses				
[Circuit Protection] FCC・FHC Series	○	○	○	○
[Circuit Protection] FCCR Series	○	○	○	○
[Circuit Protection] FMC Series	○	○	○	○
[Circuit Protection] SBF Series	○	○	○	○
Chip Fusible Resistors				
[Circuit Protection] FRC Series	○	×	○	○
ESD Suppressors				
[Circuit Protection] SPC Series	○	○	○	○
[Circuit Protection] HSPC Series	○	○	○	○
Chip Attenuators				
[High Frequency] RAC101A	○	×	○	○
Chip Thermistors				
[Temperature Compensation] LTC Series	○	○	○	○

<<NOTE>>The threshold in Pb free, Halogen free and Antimony free product shows the content in a homogeneous material.

*○*mean the items are matched the condition. *×*mean the items are not match the condition.

RoHS Directive Compliance & REACH Action

1. RoHS Directive Compliance

(1) All Kamaya products are in compliance with RoHS directive*1.

(2) The following 6 materials are prohibited by RoHS directive.

- Lead(Pb) -Hexavalent Chromium
- Cadmium(Cd) -Polybrominated Bipheyl(PBB)
- Mercury(Hg) -Polybrominated Diphenyl Ether(PBDE)

(3) PbO is content in glass materials of Kamaya products.

However, this is exception stated by RoHS directive.

=>Directive 2011/65/EU OF THE EUROPEAN PARLIAMENT

AND OF THE COUNCIL of 8 June 2011 7(c)-I

Electrical and electronic components containing lead in a glass or ceramiother than dielectric ceramic in capacitors, e.g. piezoelectronic devices,or in a glass or ceramic matrix compound.

(4) About shipment product after January,2004 of our product(KAMAYA brand product),we ship it with an article (an electrode plating no lead article) for environment.

2. Kamaya REACH Action

Kamaya produce and develop our products in compliance with REACH*2 which is effective since June 2007.

Please contact Kamaya Sales department about contained material of SVHC*3 in Kamaya product, which need permission in REACH regulation.

*1 RoHS Directive(The restriction of the certain hazardous substances in electrical and electronic equipment.)

*2. REACH (The Regulation for Registration, Evaluation, Authorization, and Restriction of Chemicals)

*3. SVHC (Substances of Very High Concern)

Substances in REACH regulation that especially affect the global environment and human body.

Please refer to ECHA (European Chemicals Agency) website for detail about SVHC in REACH regulation.

ECHA website :

(http://echa.europa.eu/chem_data/authorisation_process/candidate_list_table_en.asp)

CONTENTS

Chip Resistors

General purpose

NEW Fixed Thick Film Chip Resistors; Rectangular Type	RMC	2
Fixed Thick Film Chip Resistors; Rectangular & Precision	RGC	3
NEW Fixed Thin Film Chip Resistors; Rectangular Type	RNC	3
NEW Fixed Thick Film Chip Resistors; Rectangular Type & Anti-Sulfuration	RMNW, RMAW	4
Trimable Chip resistors; Rectangular Type	FCR	5
Fixed Thick Film Chip Resistors; Rectangular & High Ohm	RHC	5
Fixed Thick Film Chip Resistors; Rectangular & High Voltage	RVC	6
Fixed Thick Film Chip Resistors; Rectangular & Ultra High Voltage	RZC	6
Fixed Thick Film Chip Resistors; Rectangular & Anti Surge	RPC	7
Fixed Thick Film Chip Resistors; Rectangular Type & Low Ohm	RLC	8
NEW Fixed Thick Film Chip Resistors; Rectangular Type & Low Ohm	RCC	9
NEW Metal-Plate Chip Resistors; Low Ohm	RLP, MLP	10
Fixed Chip Resistor Networks; Rectangular Type	RAC	11

Anti-Sulfuration

Trimable & Sensing

High Voltage

Surge

Sensing

Chip Network

Chip Attenuators & Chip Thermistors

High Frequency

Temperature Compensation

Chip Attenuators	RAC101A	12
Linear Positive T-C Chip Thermistors; Rectangular Type	LTC	12

Chip Fusible Resistors

Circuit Protection

Chip Fusible Resistors ; Rectangular Type	FRC	13
---	------------	----

Chip Fuses

Circuit Protection

Chip Fuses ; Rectangular Type	FCC, FHC	14
NEW Chip Fuses; Rectangular Type/Low Ohm Fast Acting/In-rush Withstand	FMC	16
NEW Chip Fuses; Rectangular Type	FCCR	18
Chip Fuses; Rectangular Type/Slow Blow	SBF32	19
Support of Chip Fuse selection		19

ESD Suppressors

Circuit Protection

ESD Suppressors	SPC10	20
ESD Suppressors	HSPC16	21

Packaging for SMD

Packaging for Surface Mount Devices		22
-------------------------------------	--	----

Leaded Resistors

Pulse

High Voltage

Packaging for Leaded Resistors

Fixed Conductive Path Resistors	RC1/2U	24
Fixed Carbon Composition Resistors	RC	24
Fixed High Voltage Resistors; Precision	RH	25
Packaging for Leaded Resistors		25

Capacitors

Multilayer Ceramic Capacitor		26
Film Capacitors		27

Information

SMD Product handling manual		28
SMD Product handling manual (RECOMMENDED LAND PATTERN)		30
SMD Product handling manual (RECOMMENDED SOLDERING CONDITION)		31
Term Explanation		32
Product Marking		34
Standard Resistance Values and Symbols		35
Kamaya Shipping Label		36

Chip Resistors

General purpose

KAMAYA OHM <http://www.kamaya.co.jp>

NEW
RMC


Halogen Free

Antimony Free

●Features

New line up Tolerance :0.5%, 0603mm to 2012mm.
01005 to 2512 inch size and Jumper chip available.
Precise dimension by Laser-scriber method(RMC1/20,RMC1/32).
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
Walsin Technology Corporation OEM products (1206 to 0402 inch) are also available.

●Dimensions

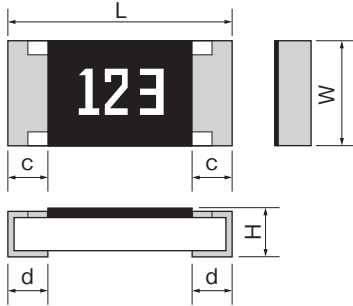

Please refer to Specification (Reference) at the Website for Marking.

Rated resistance value marking is 3-digit on the over coating except RMC1/16S & RMC1/20 & RMC1/32.
4-digit marking is available for F & G tolerance except RMC1/16, RMC1/16S & RMC1/20 & RMC1/32 type.

Unit : mm

Style	Metric	Inch	Product	L	W	H	c	d	*Unit weight/pc.
RMC1/32	0402	01005	KAMAYA	0.4±0.02	0.2 ±0.02	0.13±0.02	0.08 ±0.03	0.1 ±0.03	0.035mg
RMC1/20	0603	0201	KAMAYA	0.6±0.03	0.3 ±0.03	0.23±0.03	0.1 ±0.05	0.15 ±0.05	0.16mg
RMC1/16S	1005	0402	KAMAYA WALSIN	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.1	0.25 ^{+0.05} _{-0.10}	0.6mg
RMC1/16	1608	0603	KAMAYA WALSIN	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3 ±0.1	0.3 ±0.1	2mg
RMC1/10	2012	0805	KAMAYA WALSIN	2.0±0.1	1.25±0.10	0.55±0.10	0.4 ±0.2	0.4 ±0.2	5mg
RMC1/8	3216	1206	KAMAYA WALSIN	3.2±0.15	1.6 ±0.15	0.55±0.10	0.5 ±0.25	0.5 ±0.25	9mg
RMC1/4	3225	1210	KAMAYA	3.2±0.15	2.5 ±0.15	0.55±0.15	0.5 ±0.25	0.5 ±0.25	16mg
RMC1/2	5025	2010	KAMAYA	5.0±0.15	2.5 ±0.15	0.55±0.15	0.6 ±0.2	0.6 ±0.2	25mg
RMC1	6332	2512	KAMAYA	6.3±0.15	3.2 ±0.15	0.55±0.15	0.6 ±0.2	0.6 ±0.2	40mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70 °C W	Rated Resistance Range					Tolerance on Rated Resistance	Temperature Coefficient of Resistance		Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
			1 Ω	10 Ω	100 Ω	1M Ω	10M Ω		Code	10 ⁻⁶ /°C			
RMC1/32	0402 (01005)	0.03 (0.5A)		4.7~9.1					F, J	— +600~-200 — ±300 — ±200	15	50	-55~+125
NEW RMC1/20	0603 (0201)	0.05 (1.0A)	0.47~0.91	1~3.92	10~91			J	— +1000~-+300 — +600~-200 — +350~-100	25			
				4.02~9.76	10~1M		1.1M~10M	D, F, G, J F, J	— ±200				
				1~9.76	10~1M			J G, J	— +1000~-+300 — ±200				
NEW RMC1/16S	1005 (0402)	0.1 (1.0A)			10~1M			D, F D, F, J	— ±100 — ±200		50	100	
			0.47~0.91	1~9.76			1.02M~3.3M	F, J K	— +1000~-+300 — +500~-200				
				1~9.76	10~3.3M			G, J D, F	— ±200 — ±100				
							3.6M~10M	G, J F	— ±200 — ±100				
NEW RMC1/16	1608 (0603)	0.1 (2.0A)						11M~22M	J	— ±200		150	
			0.27~0.91	1~9.76	10~2.2M			K F, G, J	— +1000~-+300 — +500~-200				
					10~2.2M			G, J D, F	— ±200 — ±100				
							2.21M~3.3M 3.6M~10M	D, F, G, J F, G, J	— ±200 — ±200				
NEW RMC1/10	2012 (0805)	0.125 (2.0A)						11M~22M	J	— ±200		200	
			0.22~0.91	1~9.76	10~1M			K F, G, J	— +1000~-+300 — +500~-200				
					10~1M			G, J F	— ±200 — ±100				
						1.02M~10M		F, G, J J	— ±200 — ±200				
RMC1/8	3216 (1206)	0.25 (2.0A)						11M~24M	J	— ±200		500	-55~+155
			0.2~0.91	1~9.76	10~1M			K F, J	— +1000~-+300 — +500~-200				
					10~1M			G, J F	— ±200 — ±100				
						1.02M~10M		F, G, J J	— ±200 — ±200				
RMC1/4	3225 (1210)	0.5 (2.0A)						11M~22M	J	— ±200		200	
			0.33~0.91	1~9.76	10~1M			K F, J	— +1000~-+300 — +500~-200				
					10~1M			G, J F	— ±200 — ±100				
						1.1M~22M		F, G, J J	— ±200 — ±200				
RMC1/2	5025 (2010)	0.75 (2.0A)						1.1M~22M	J	— ±200		200	
			0.33~0.91	1~9.76	10~1M			K F, J	— +1000~-+300 — +500~-200				
					10~1M			G, J F	— ±200 — ±100				
						1.1M~22M		J K	— ±200 — ±200				
RMC1	6332 (2512)	1.0 (2.0A)						1.1M~22M	J	— ±200		200	
					10~1M			K F, J	— +1000~-+300 — +500~-200				
								G, J F	— ±200 — ±100				
						1.1M~22M		J K	— ±200 — ±200				

RGC


Halogen Free

Antimony Free

●Features

Suitable for precision applications.
High stabilized characteristics and Performance equivalent to thin film chip resistors.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
Line up, 01005 sizes resistor.

●Dimensions

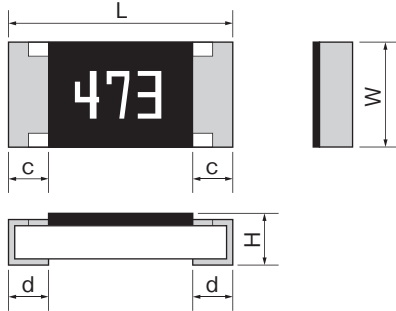

Rated resistance value marking is with 3-digit (E24) or 4-digit (E96) on the over coating.
RGC1/16 : only 3-digit marking is available.
RGC1/16S, 1/20, 1/32 : only No marking is available.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RGC1/32	0402	01005	0.4±0.02	0.2 ±0.02	0.13 ±0.02	0.08 ±0.03	0.1 ±0.03	0.035mg
RGC1/20	0603	0201	0.6±0.03	0.3 ±0.03	0.23 ±0.03	0.1 ±0.05	0.15 ±0.05	0.16mg
RGC1/16S	1005	0402	1.0±0.05	0.5 ±0.05	0.35 ±0.05	0.2 ±0.1	0.25 ^{+0.05} _{-0.10}	0.6mg
RGC1/16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45 ±0.10	0.25 ±0.10	0.3 ±0.1	2mg
RGC1/10	2012	0805	2.0±0.1	1.25 ±0.10	0.6 ±0.1	0.4 ±0.2	0.4 ±0.2	5mg
RGC1/8	3216	1206	3.2±0.15	1.6 ±0.15	0.6 ±0.1	0.5 ±0.25	0.5 ±0.25	9mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance Code	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
RGC1/32	0402 (01005)	0.03	100~100k	D(±0.5%)	C ±50	15	50	-55~+125
RGC1/20	0603 (0201)	0.05	51~976 1k~1M	D(±0.5%)	K ±100 C ±50	25		
RGC1/16S	1005 (0402)	0.063	100~1M 1.02M~3.3M	F(±1%)	K ±100 C ±50	50		-55~+155
RGC1/16	1608 (0603)	0.1 ¹ (0.063)	3.3~97.6 10~97.6 100~1M 1.02M~3.3M	F(±1%)	K ±100 C ±50	100		-55~+125
RGC1/10	2012 (0805)	0.125 ¹ (0.1)	3.3~97.6 10~3.3M	F(±1%)	C ±50	150		-55~+155
RGC1/8	3216 (1206)	0.25 ¹ (0.125)	3.3~97.6 10~4.7M	F(±1%)	C ±50	200		

*1 If Category Temperature Range is "-55~+155", Rated Dissipation is applied to in ().

Note1. E24, E96 are available for "F"(1%) and "D"(0.5%)


Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

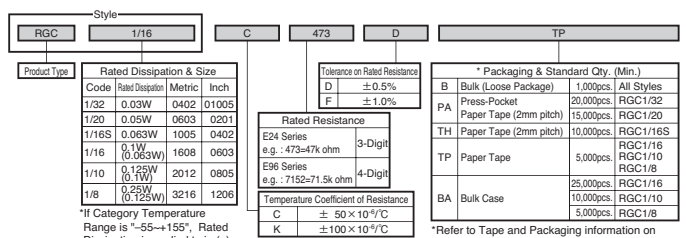

*Refer to Tape and Packaging information on pages 22 and 23.
Please contact Kamaya sales department for 1mm pitch taping of RGC1/16S, 1/20.

NEW

RNC

Halogen Free


Antimony Free

Pb Free

●Features

Suitable for high precision, higher stability and reliability applications.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
New line up 0402 inch and 0603 inch.

●Dimensions

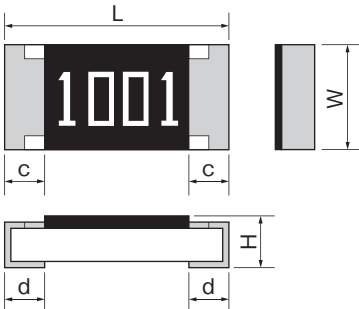

Rated resistance value is marked with 3-digit (E24) or 4-digit (E96) on the over coating.
RNC06: only No marking is available.

Style	Metric	Inch	Product	L	W	H	c	d	*Unit weight/pc.
RNC06	0603	0201	KAMAYA	0.6 ±0.03	0.3 ±0.03	0.23±0.03	0.1 ±0.05	0.15±0.05	0.16mg
RNC10	1005	0402	WALSIN	1.0 ±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.1	0.25±0.10	0.6mg
RNC16	1608	0603	KAMAYA	1.55±0.10	0.8 ±0.1	0.45±0.15	0.25±0.15	0.3 ±0.15	2mg
RNC20	2012	0805	KAMAYA	2.0 ±0.15	1.25 ^{+0.10} _{-0.05}	0.6 ±0.1	0.4 ±0.2	0.3 ^{+0.2} _{-0.1}	5mg
RNC32	3216	1206	KAMAYA	3.1 ±0.1	1.55 ^{+0.10} _{-0.05}	0.6 ±0.1	0.45±0.20	0.3 ^{+0.2} _{-0.1}	9mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance Code	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
RNC06	0603 (0201)	0.03	100Ω~1kΩ	B(±0.1%)	E ±25	15		50	-55~+125
RNC10	1005 (0402)	0.05	47Ω~4.99kΩ 5.1kΩ~10kΩ	D(±0.5%)	E ±25 C ±50	25			
RNC16	1608 (0603)	0.063	10Ω~100kΩ 4.7Ω~68kΩ	B(±0.1%) C(±0.25%) D(±0.5%)	E ±25 C ±50	50	E96 E24	100	-55~+155
RNC20	2012 (0805)	0.1	100Ω~130kΩ 10Ω~130kΩ	B(±0.1%) C(±0.25%) D(±0.5%)	E ±25 C ±50	75			
RNC32	3216 (1206)	0.125	100Ω~180kΩ 10Ω~180kΩ	B(±0.1%) C(±0.25%) D(±0.5%)	E ±25 C ±50	150			-55~+125


Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

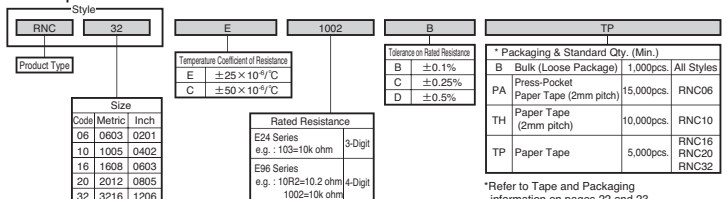

*Refer to Tape and Packaging information on pages 22 and 23.

NEW

RMNW • RMAW


Halogen Free

Antimony Free

●Features

Special electrode structure, High anti-sulfuration performance, New Line up of 2 type Anti-sulfuration Chip Resistors.
 RMNW/Barrier type Barrier layer inside of electrode to prevent Sulfuration and Disconnection.
 RMAW/Special electrode type High anti-sulfuration performance electrode inside
 RMNW: qualified for Humid Sulfur Vapor Test ASTM B-809 60°C, 480h
 RMAW: qualified for hydrogen sulfide test, H₂S: 3ppm, 40°C, 90%R.H., 1000h
 AEC-Q200 qualified.

●Dimensions

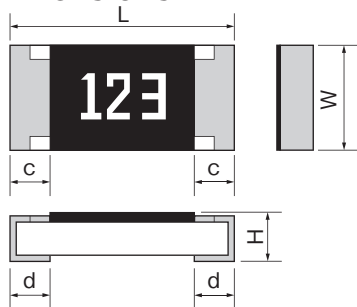

Rated resistance value mark is on the over coating except RMNW10 & RMAW10.

Unit : mm

Style	Metric	Inch	Product	L	W	H	c	d	*Unit weight/pc.
RMNW10	1005	0402	WALSIN	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.10	0.25±0.10	0.6mg
RMAW10									
RMNW16	1608	0603	WALSIN	1.6±0.10	0.8 ±0.10	0.45±0.15	0.3 ±0.10	0.3 ±0.15	2mg
RANW16									
RMNW20	2012	0805	WALSIN	2.0±0.10	1.25±0.10	0.50±0.15	0.4 ±0.20	0.4 ±0.20	5mg
RANW20									
RMNW32	3216	1206	WALSIN	3.1±0.10	1.6 ±0.10	0.6 ±0.15	0.5 ±0.20	0.45±0.20	9mg
RMAW32									
RMNW50	2025	2010	WALSIN	5.0±0.2	2.5 ±0.2	0.55±0.10	0.6 ±0.25	0.65±0.25	25 mg

*Values for reference

●Ratings

●RMNW

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range of Tolerance on Rated Resistance			Temperature Coefficient of Resistance		Limiting Element Voltage V	Category Temperature Range °C
			D(±0.5%)	F(±1%)	J(±5%)	Code	10 ⁻⁶ /°C		
RMNW10	1005 (0402)	0.1 (1.0A)	—	10.2~1MΩ		K	±100	50	-55~+155
			1.02MΩ~10MΩ		—	±200			
			—	1.0Ω~10Ω	—	+400~-200			
RMNW16	1608 (0603)	0.1 (1.0A)	10Ω~1MΩ	10.2~1MΩ	K	±100			
			—	1.02MΩ~10MΩ	—	±200			
			—	1.0Ω~10Ω	—	+400~-200			
RMNW20	2012 (0805)	0.125 (1.5A)	—	10.2~1MΩ		K	±100	150	
RMNW32	3216 (1206)	0.25 (2.0A)	—	1.02MΩ~10MΩ		—	±200	200	
RMNW50	5025 (2010)	0.5 (2.0A)	—	1.0Ω~10Ω		—	+400~-200	200	

●RMAW

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range of Tolerance on Rated Resistance			Temperature Coefficient of Resistance		Limiting Element Voltage V	Category Temperature Range °C
			D(±0.5%)	F(±1%)	J(±5%)	Code	10 ⁻⁶ /°C		
RMAW10	1005 (0402)	0.1 (1.0A)	-	-	10.2~1MΩ	K	±100	50	-55~+155
RMAW16	1608 (0603)	0.1 (1.0A)	-	-	1.02MΩ~10MΩ	-	±200	75	
RMAW20	2012 (0805)	0.125 (1.5A)	-	-	1.0Ω~10Ω	-	+400~-200	150	
RMAW32	3216 (1206)	0.25 (2.0A)	-	-	-	-	-	200	

Note1. E24 series is available, E96 series is available for tolerance "D" (0.5%) and "F" (1%)

Note2. Rated Voltage = √(Rated Dissipation)×(Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Note5. Jumper: Resistance Value is less than 50m ohm

●Part Number Description

Example

Style

RMNW	20
------	----

Product Type	
RMNW	Barrier Type
RMAW	Special Electrode Type

Size		
Code	Metric	Inch
10	1005	0402
16	1608	0603
20	2012	0805
32	3216	1206
50	5025	2010

Temperature Coefficient of Resistance		
-	Standard	Resistor
K	±100×10 ⁻⁶ /°C	Resistor
None	-	Jumper

Rated Resistance		
J(±5%): E24 Series e.g. : 2R2=2.2Ω 103=100kΩ	3-Digit	Resistor
F(±1%): E24 Series & E-96 Series e.g. : 10R2=10.2Ω 1002=10kΩ	4-Digit	Resistor
JP		Jumper

Tolerance on Rated Resistance		
F	±0.5%	Resistor
G	±1%	
J	±5%	
None	-	Jumper


TP			
* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	10,000pcs.	RMNW10,RMAW10
		5,000pcs.	RMNW16,RMAW16 RMNW20,RMAW20 RMNW32,RMAW32
		4,000pcs.	RMNW50
TH	Paper Tape(2mm pitch)	10,000pcs.	RMNW10,RMAW10 RMNW16,RMAW16 RMNW20,RMAW20 RMNW32,RMAW32
TP	Paper Tape	5,000pcs.	RMNW10,RMAW10 RMNW16,RMAW16 RMNW20,RMAW20 RMNW32,RMAW32
TE	Embossed Tape	4,000pcs.	RMNW50

*Refer to Tape and Packaging information on pages 22 and 23.

FCR

- **Features** Trimable device and replaceable with various resistors.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

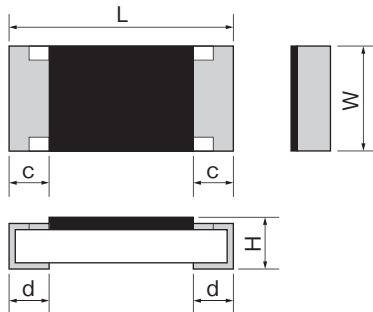

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCR1/16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.10}	0.45±0.10	0.3±0.1	0.3±0.1	2mg
FCR1/10	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.4±0.2	0.4±0.2	5mg
FCR1/8	3216	1206	3.2±0.15	1.6±0.15	0.55±0.10	0.5±0.25	0.5±0.25	9mg
FCR1/4	3225	1210	3.2±0.15	2.5±0.15	0.55±0.15	0.5±0.25	0.5±0.25	16mg
FCR1/2	5025	2010	5.0±0.15	2.5±0.15	0.55±0.15	0.6±0.2	0.6±0.2	25mg
FCR1	6332	2512	6.3±0.15	3.2±0.15	0.55±0.15	0.6±0.2	0.6±0.2	40mg

Unit : mm
*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
			Rated Resistance Range	Temperature Coefficient of Resistance 10 ³ /°C					
FCR1/16	1608 (0603)	0.063	10Ω~4.7MΩ	±200		50		100	
FCR1/10	2012 (0805)	0.1				150			
FCR1/8	3216 (1206)	0.125					E24		
FCR1/4	3225 (1210)	0.25	1Ω~9.1Ω	+500~-200	L (±15%) ~ (0~-30%)	200		500	-55~+125
FCR1/2	5025 (2010)	0.5	10Ω~4.7MΩ	±200					
FCR1	6332 (2512)	1.0							

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.
Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.
Note4. T.C.R.: ±100×10⁻⁴/°C (10 ohm~1M ohm) is available on your request.
Note5. The indicated values of Ratings are in the case without trimming.

● Part Number Description

Example

FCR	1/4	471	L	TE
Product Type	Rated Dissipation & Size	Tolerance on Rated Resistance	* Packaging & Standard Qty. (Min.)	
	Code Rated Dissipation Metric Inch	~ -30% L ±15%	B Bulk (Loose Package)	1,000pcs. All Styles
	1/16 0.063W 1608 0603		TP Paper Tape	5,000pcs. FCR1/16 FCR1/10 FCR1/8
	1/10 0.1W 2012 0805		TE Embossed Tape	4,000pcs. FCR1/4 FCR1/2 FCR1
	1/8 0.125W 3216 1206			
	1/4 0.25W 3225 1210			
	1/2 0.5W 5025 2010			
	1 1.0W 6332 2512			

*Refer to Tape and Packaging information on pages 22 and 23.


RHC

Halogen Free

Antimony Free

- **Features** Suitable for compact instrumentation, infrared rays, sensors, etc.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

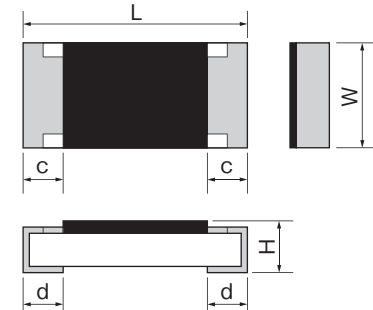

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RHC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3±0.1	2mg
RHC20	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.4±0.2	0.4±0.2	5mg

Unit : mm
*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Voltage V	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ³ /°C	Preferred Number series for resistors	Isolation Voltage V	Category Temperature Range °C
RHC16	1608 (0603)	15	100MΩ ~ 270MΩ	J (± 5%)	0~-2,000	E12	100	-55~-+155
			100MΩ ~ 4GΩ	K (±10%)				
			100MΩ ~ 150GΩ	M (±20%) N (±30%) H (±50%)				
			100MΩ ~ 1GΩ	J (± 5%) K (±10%)				
RHC20	2012 (0805)	15	100MΩ ~ 10GΩ	M (±20%) N (±30%) H (±50%)	±2,000	E12	100	-55~-+125
			100MΩ ~ 10GΩ	M (±20%) N (±30%) H (±50%)				
			100GΩ ~ 150GΩ	M (±20%) N (±30%) H (±50%)				
			100GΩ ~ 150GΩ	M (±20%) N (±30%) H (±50%)				

● Part Number Description

RHC	20	75GΩ	M	TP
Product Type	Size	Rated Resistance	Tolerance on Rated Resistance	* Packaging & Standard Qty. (Min.)
	Code Metric Inch	e.g.: 100M=100M ohm 1GΩ=1G ohm 10GΩ=10G ohm 100GΩ=100G ohm	J ± 5% K ±10% M ±20% N ±30% H ±50%	B Bulk (Loose Package) 1,000pcs. TP Paper Tape 5,000pcs.
	16 1608 0603			
	20 2012 0805			

*Refer to Tape and Packaging information on pages 22 and 23.


RVC

Halogen Free

Antimony Free

- **Features** Higher Limiting Element Voltage compared with RMC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

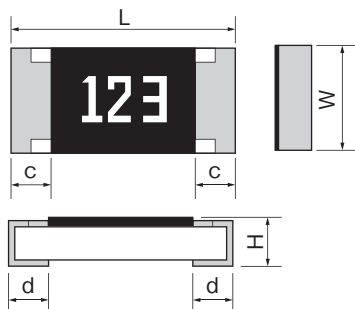

Rated resistance is marked with 3-digit (E24)
or 4-digit (E96) on the over coating.
RVC16 : only 3-digit marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RVC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3±0.1	2mg
RVC20	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.4±0.2	0.4±0.2	5mg
RVC32	3216	1206	3.2±0.15	1.6±0.15	0.55±0.10	0.5±0.25	0.5±0.25	9mg
RVC50	5025	2010	5.0±0.15	2.5±0.15	0.55±0.15	0.6±0.2	0.6±0.2	25mg
RVC63	6332	2512	6.3±0.15	3.2±0.15	0.55±0.15	0.6±0.2	0.6±0.2	40mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Limiting Element Voltage V	Combinations of Rated Resistance Range and Tolerance on Rated Resistance					Temperature Coefficient of Resistance 10 ⁻¹ /°C	Isolation Voltage V	Category Temperature Range °C
				D(±0.5%)	F(±1%)	G(±2%)	J(±5%)	K(±10%)			
RVC16	1608 (0603)	0.1	200	—	—	—	470Ω~10MΩ	—	K ±100	100	-55~+125
RVC20	2012 (0805)	0.25	400	—	—	—	47Ω~464Ω	—	K ±100	—	
RVC32	3216 (1206)	0.25	500	100kΩ~4.7MΩ	100Ω~10MΩ	100Ω~51MΩ	—	—	K ±100	—	
RVC50	5025 (2010)	0.5	800	—	—	—	47Ω~97.6Ω	—	K ±100	—	
RVC63	6332 (2512)	1.0	800	—	—	—	47Ω~464Ω	—	K ±100	—	

Note1. E24 series is available. E96 series is available for tolerance "D" (0.5%) and "F" (1%).
Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
Note3. Limiting Element Voltage can only be applied to resistors, when the resistance value is equal to or higher than the critical resistance value.
Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

Style	RVC	32	K	475	F	TP
Product Type	Code	Size	Rated Resistance	Tolerance on Rated Resistance	* Packaging & Standard Qty. (Min.)	
	Code	Metric	Inch		B	Bulk (Loose Package)
	16	1608	0603	E24 Series e.g.: 475=4.7M ohm 3-Digit	1,000pcs.	All Styles
	20	2012	0805	E96 Series e.g.: 7154=7.15M ohm 4-Digit	5,000pcs.	RVC16 RVC20 RVC32
	32	3216	1206		4,000pcs.	RVC50 RVC63
	50	5025	2010			
	63	6332	2512			

*Refer to Tape and Packaging information on pages 22 and 23.


RZC

Halogen Free

Antimony Free

- **Features** Suitable for the backlight inverter for large-screen LCD.
Higher Limiting Element Voltage than RVC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

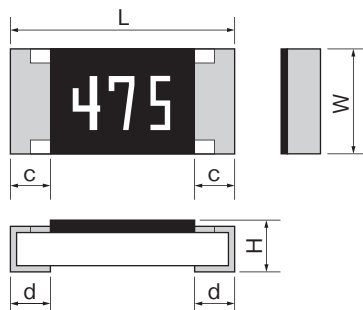

Rated resistance is marked with 3-digit(E24) on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RZC50	5025	2010	5.0±0.15	2.5±0.15	0.55±0.15	0.5±0.2	0.6±0.2	25mg
RZC63	6332	2512	6.3±0.15	3.2±0.15	0.55±0.15	0.6±0.2	0.6±0.2	40mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Limiting Element Voltage V	Anti-Rush Voltage Characteristic	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻¹ /°C	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
RZC50	5025 (2010)	0.5	1500	—	3000	1.0MΩ~16MΩ	J(±5%) K(±10%) M(±20%)	E24	500	-55~+125
RZC63	6332 (2512)	1.0	2000	—	—	—	—	—	—	—

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
Note2. Limiting Element Voltage can only be applied to resistors, when the resistance values is equal to or higher than the critical resistance value.
Note3. Anti-Rush Voltage Characteristics : 3,000V, 1sec "On", 9sec "Off", 100,000 times, Room temperature.

●Part Number Description

Example

Style	RZC	50	—	475	J	TE
Product Type	Code	Size	Rated Resistance	Tolerance on Rated Resistance	* Packaging & Standard Qty. (Min.)	
	Code	Metric	Inch		B	Bulk (Loose Package)
	50	5025	2010	E24 Series e.g.: 105=1.0M ohm	1,000pcs.	All Styles
	63	6332	2512	E96 Series e.g.: 475=4.7M ohm	5,000pcs.	RZC50 RZC63
				166=16M ohm	4,000pcs.	All Styles

*Refer to Tape and Packaging information on pages 22 and 23.


RPC

Halogen Free

Antimony Free

- **Features** Higher Anti surge performance compared with RMC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

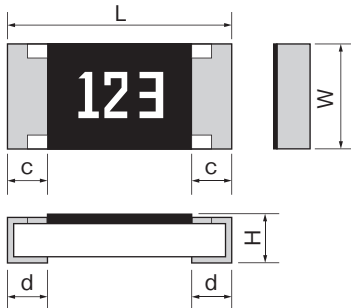

Rated resistance value is marked with 3-digit on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RPC20	2012	0805	2.0±0.1	1.25 ±0.10	0.55±0.10	0.3±0.2	0.4±0.2	5mg
RPC32	3216	1206	3.2±0.15	1.6 ±0.15	0.55±0.10	0.3±0.2	0.5±0.25	9mg
RPC35	3225	1210	3.2±0.15	2.5 ±0.15	0.55±0.15	0.3±0.2	0.5±0.25	16mg
RPC50	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.3±0.15	0.6±0.2	25mg
RPC63	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.3±0.15	0.6±0.2	40mg

*Values for reference

●Ratings



Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
			Rated Resistance Range	Temperature Coefficient of Resistance 10 ⁻³ /°C					
RPC20	2012 (0805)	0.125	0.27 Ω ~ 0.91 Ω ±200 1 Ω ~ 1M Ω ±100 1.1M ~ 22M Ω ±200		J (± 5%) K (± 10%) M (± 20%)	150	E24	500	−55 ~ +155
RPC32	3216 (1206)	0.25				200			
RPC35	3225 (1210)	0.5							
RPC50	5025 (2010)	0.75							
RPC63	6332 (2512)	1.0							

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors, when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.


●1Pulse Limiting Power Curve Comparison (e.g 100Ω value for reference)

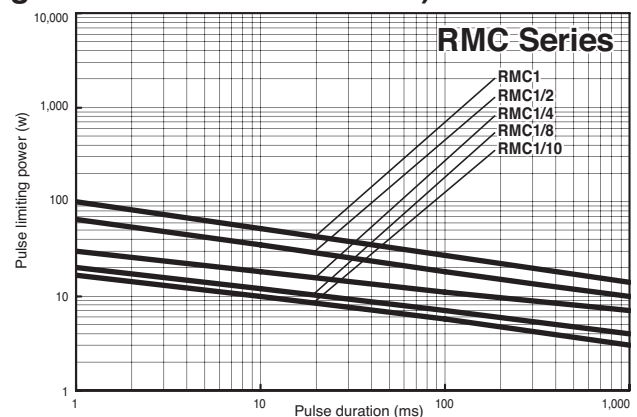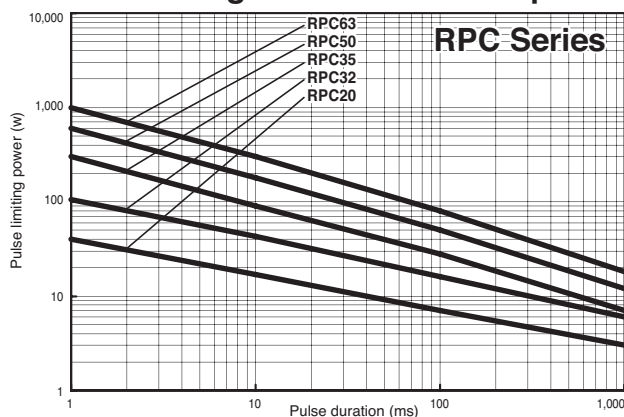

* pulse limiting power curve is different from resistance value.
* Please contact Kamaya sales department for the details.

●Part Number Description

Example



Product Type

Size

Code	Metric	Inch
20	2012	0805
32	3216	1206
35	3225	1210
50	5025	2010
63	6332	2512

103

Rated Resistance

E24 Series e.g. : 2R2=2.2 ohm 103=10k ohm	3-Digit
---	---------

J

Tolerance on Rated Resistance

J	± 5%
K	± 10%
M	± 20%

TE

* Packaging & Standard Qty. (Min.)

B	Bulk (Loose Package)	1,000pcs.	All Styles
TP	Paper Tape	5,000pcs.	RPC20 RPC32
TE	Embossed Tape	4,000pcs.	RPC35 RPC50 RPC63

*Refer to Tape and Packaging information on pages 22 and 23.


RLC

Halogen Free

Antimony Free

- **Features** Most suitable for a detection of current in power source circuits, motor circuits, etc.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions



Rated resistance is marked with 4-digit on the over coating. (RLC20~RLC63)
RLC10 : only No marking is available.
Please contact KAMAYA for marking of RLC16.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RLC10	1005	0402	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2±0.1	0.25 ^{+0.05} _{-0.10}	0.6mg
RLC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3 ±0.1	2mg
RLC20	2012	0805	2.0±0.15	1.25±0.10	0.6 ±0.1	0.4±0.2	0.4 ±0.2	5mg
RLC32	3216	1206	3.1±0.2	1.6 ±0.15	0.6 ±0.1	0.5±0.25	0.3 ^{+0.2} _{-0.1}	9mg
RLC35	3225	1210	3.1±0.2	2.5 ±0.15	0.6 ±0.15	0.5±0.25	0.3 ^{+0.2} _{-0.1}	16mg
RLC50	5025	2010	5.0±0.2	2.5 ±0.15	0.6 ±0.15	0.6±0.2	0.6 ±0.2	25mg
RLC63	6332	2512	6.3±0.2	3.2 ±0.15	0.6 ±0.15	0.6±0.2	0.6 ±0.2	40mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Rated Current Range A	Combinations of Rated Resistance Range, Temperature Coefficient of Resistance and Tolerance on Rated Resistance			Isolation Voltage V	Category Temperature Range ℃
				Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻⁶ /℃		
RLC10	1005 (0402)	0.125	0.11~1.11	100mΩ~430mΩ 470mΩ~3.3Ω 3.6Ω~10Ω	F, J F, G, J F, J	0~+300 0~+200 ±100	100	-55~+125
RLC16	1608 (0603)	0.25	0.14~1.58	100mΩ~180mΩ	F, G, J	0~+250		
				200mΩ~430mΩ		0~+200		
				470mΩ~3.3Ω		±100		
				3.6Ω~10Ω	F, J			
RLC20	2012 (0805)	0.33	0.15~2.56	50mΩ~180mΩ 200mΩ~430mΩ	F, G, J	0~+250 0~+200	500	
RLC32	3216 (1206)	0.5	0.18~3.16	470mΩ~3.3Ω 3.6Ω~10Ω		F, J		
RLC35	3225 (1210)	0.66	0.44~3.63	50mΩ~180mΩ	F, G, J	0~+250		
RLC50	5025 (2010)	0.75	0.47~3.87	200mΩ~430mΩ 470mΩ~3.3Ω		0~+200 ±100		
RLC63	6332 (2512)	1.0	0.55~4.47					

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation})/(\text{Rated Resistance})}$ Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
Note3. Limiting Element Voltage*1 is set up on RLC16, 20, 32, and rated current is not applied in the range of following rated of Resistance*2.

*1 RLC16=1.41V, RLC20=1.58V, RLC32=1.81V

*2 RLC16 and RLC20 : 7.5Ω < R, RLC32 : 6.2Ω < R

The Rated Current in the above range of the Rated Resistance Value is calculated as below way.

Rated Current=Limiting Element Voltage/Rated Resistance


● Rated Resistance

Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code
50mΩ	R050	82mΩ	R082	200mΩ	R200	430mΩ	R430	750mΩ	R750	1.6Ω	1R60	4.3Ω	4R30
51mΩ	R051	90mΩ	R090	220mΩ	R220	470mΩ	R470	800mΩ	R800	1.8Ω	1R80	4.7Ω	4R70
56mΩ	R056	91mΩ	R091	240mΩ	R240	500mΩ	R500	820mΩ	R820	2.0Ω	2R00	5.1Ω	5R10
60mΩ	R060	100mΩ	R100	250mΩ	R250	510mΩ	R510	900mΩ	R900	2.2Ω	2R20	5.6Ω	5R60
62mΩ	R062	110mΩ	R110	270mΩ	R270	560mΩ	R560	910mΩ	R910	2.4Ω	2R40	6.2Ω	6R20
65mΩ	R065	120mΩ	R120	300mΩ	R300	600mΩ	R600	1.0Ω	1R00	2.7Ω	2R70	6.8Ω	6R80
68mΩ	R068	130mΩ	R130	330mΩ	R330	620mΩ	R620	1.1Ω	1R10	3.0Ω	3R00	7.5Ω	7R50
70mΩ	R070	150mΩ	R150	360mΩ	R360	650mΩ	R650	1.2Ω	1R20	3.3Ω	3R30	8.2Ω	8R20
75mΩ	R075	160mΩ	R160	390mΩ	R390	680mΩ	R680	1.3Ω	1R30	3.6Ω	3R60	9.1Ω	9R10
80mΩ	R080	180mΩ	R180	400mΩ	R400	700mΩ	R700	1.5Ω	1R50	3.9Ω	3R90	10Ω	100

Note3. Other nominal resistances values are also available, please contact KAMAYA for further information.

● Part Number Description

Example



Product Type

Size		
Code	Metric	Inch
10	1005	0402
16	1608	0603
20	2012	0805
32	3216	1206
35	3225	1210
50	5025	2010
63	6332	2512

K

R470

F

TP

Rated Resistance
e.g.: R050=50m ohm
R100=100m ohm
1R00=1 ohm
100=10 ohm

Temperature Coefficient of Resistance	
K	±100 × 10 ⁻⁶ /°C
	0~+200 × 10 ⁻⁶ /°C
-	0~+250 × 10 ⁻⁶ /°C
	0~+300 × 10 ⁻⁶ /°C

Tolerance on Rated Resistance	
F	±1%
G	±2%
J	±5%

* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Styles
TH	Paper Tape(2mm pitch)	10,000pcs.	RLC10
TP	Paper Tape	5,000pcs.	RLC16 RLC20 RLC32
TE	Embossed Tape	4,000pcs.	RLC35 RLC50 RLC63

*Refer to Tape and Packaging information on pages 22 and 23.

NEW RCC

Halogen Free


Antimony Free

Pb Free

●Features

New lineup, 0201 & 1206 Size, Lower than 50mΩ.
Suitable for current sensing of small mobile devices.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions



Resistance value is marking on surface.
Please refer to Specification (Reference) on kamaya website.
Please contact Kamaya Sales Dept. for marking of RCC16.
RCC10 & RCC06 is no marking.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.
RCC06	0603	0201	All Resistance	0.6±0.03	0.3 ±0.03	0.23 ^{+0.03} _{-0.10}	0.15 ^{+0.05} _{-0.10}	0.15 ±0.05	0.16mg
RCC10	1005	0402	All Resistance	1.0±0.05	0.5 ±0.05	0.35 ^{+0.05} _{-0.10}	0.25 ^{+0.05} _{-0.10}	0.25 ±0.05	0.6mg
RCC16	1608	0603	20mΩ ≤ R	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.5 ±0.10	0.3 ±0.1	0.3 ±0.1	2mg
			R > 20mΩ					0.55 ±0.1	
RCC20	2012	0805	20mΩ ≤ R	2.0±0.15	1.25±0.10	0.6 ±0.10	0.4 ±0.2	0.4 ±0.2	5mg
			R > 20mΩ					0.6 ±0.2	
RCC32	3216	1206	All Resistance	3.1±0.2	1.6 ±0.15	0.6 ±0.10	0.5 ±0.25	0.5 ±0.25	9mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance 10 ⁻³ /°C			
RCC06	0603(0201)	0.1	1.0 ~2.23	20mΩ ~100mΩ	0~+500	J (±5%)	50	-55~+125
RCC10	1005 (0402)	0.125	1.11~2.23	25mΩ ~ 50mΩ	0~+350	F (±1%) J (±5%)	100	
				51mΩ ~100mΩ	±150			
RCC16	1608 (0603)	0.25	1.58~5.00	10mΩ ~ 30mΩ	0~+350			
				33mΩ ~ 50mΩ	0~+250			
RCC20	2012 (0805)	0.33	1.81~5.74	51mΩ ~100mΩ	±150		500	
				10mΩ ~ 27mΩ	0~+250			
				30mΩ ~ 50mΩ	±150			
				NEW 51mΩ ~100mΩ	±100			
RCC32	3216 (1206)	0.5	2.23~5.00	20mΩ ~ 33mΩ	0~+250	J (±5%)		
				36mΩ ~100mΩ	+100			

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation})/(\text{Rated Resistance})}$

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

●Rated Resistance

Resistance	Code	Mark
10mΩ	R010	010
15mΩ	R015	015
20mΩ	R020	020
22mΩ	R022	022
24mΩ	R024	024
25mΩ	R025	025
27mΩ	R027	027
30mΩ	R030	030
33mΩ	R033	033
36mΩ	R036	036


Resistance	Code	Mark
39mΩ	R039	039
40mΩ	R040	040
43mΩ	R043	043
47mΩ	R047	047
50mΩ	R050	050
51mΩ	R051	051
56mΩ	R056	056
60mΩ	R060	060
62mΩ	R062	062
65mΩ	R065	065

Resistance	Code	Mark
68mΩ	R068	068
70mΩ	R070	070
75mΩ	R075	075
80mΩ	R080	080
82mΩ	R082	082
90mΩ	R090	90
91mΩ	R091	091
100mΩ	R100	R10

Please contact Kamaya Sales Dept. for any other resistance values.

●Part Number Description

Example

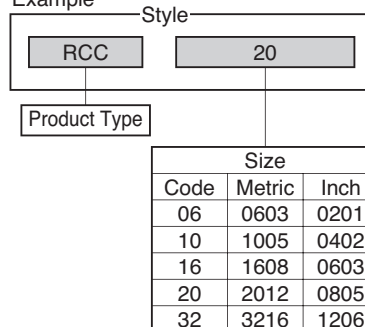

Resistance	Code	Mark
R050		
Rated Resistance e.g.: R050=50mΩ R100=100mΩ		

Tolerance on Rated Resistance	Code	Mark
F		±1%
J		±5%

* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Styles
PA	Press-Pocket Paper Tape (2mm pitch)	15,000pcs.	RCC06
TH	Paper Tape (2mm pitch)	10,000pcs.	RCC10
TP	Paper Tape	5,000pcs.	RCC16 RCC20 RCC32

*Refer to Tape and Packaging information on pages 22 and 23.

●Precautions of use

- Resistive element is on bottom surface.
Please note for inspection of parts existence & nonexistence, inversion mounting by Inspection machine.
- Resistance value will be changed by soldering condition.
Please design products in consideration of this change of resistance value.

NEW RLP,MLP


Halogen Free

Antimony Free

Pb Free

- **Features** New lineup, 1mΩ to 5mΩ, 10mΩ, 15mΩ.
Suitable for current sensing of battery pack.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions



Resistance value of RLP series are marked like below.
The resistance value of RLP63 & MLP63 are marked with 4 characters on the overcoating.
The resistance value of RLP20 & RLP32 are marked with "2 numbers" & " " on the overcoating.
Please contact KAMAYA for marking of RLP16.

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.
RLP16	1608	0603	10mΩ	1.6±0.1	0.8 ±0.1	0.3 ±0.10	0.2±0.1	0.3 ±0.1	2mg
RLP20	2012	0805	10mΩ	2.0±0.15	1.25±0.15	0.22±0.10	0.3±0.1	0.47±0.20	3mg
RLP32	3216	1206	1mΩ	3.2±0.15	1.6 ±0.15	0.32±0.15	1.1 ±0.25		12mg
			2mΩ				0.5 ±0.25		11mg
			NEW 3mΩ				0.7±0.25		11mg
			NEW 4mΩ				1.1 ±0.25		12mg
			5mΩ				1.0 ±0.25		11mg
			NEW 6mΩ			0.35±0.10	0.85±0.25		11mg
			NEW 7mΩ				0.7 ±0.25		11mg
			NEW 8mΩ				0.6 ±0.25		10mg
			9mΩ				0.3 ±0.10		9mg
			10mΩ				0.28±0.10		9mg
			NEW 12mΩ			0.22±0.10	0.65±0.25		8mg
			NEW 13mΩ				0.5 ±0.25		7mg
			15mΩ				0.5 ±0.25		6mg
			1mΩ			0.38±0.15	2.2 ±0.25		50mg
			NEW 2mΩ				1.1 ±0.25		42mg
RLP63	6332	2512	NEW 3mΩ	6.3±0.25	3.1 ±0.25	0.45±0.15	2.2 ±0.25		57mg
			NEW 4mΩ				1.95±0.25		43mg
			5mΩ				1.75±0.25		41mg
			NEW 6mΩ				1.4 ±0.25		42mg
			NEW 7mΩ			0.35±0.15	1.1 ±0.25		41mg
			NEW 8mΩ				0.8 ±0.25		40mg
			9mΩ				1.75±0.25		30mg
			10mΩ				1.4 ±0.25		26mg
			NEW 12mΩ			0.23±0.15	0.95±0.25		26mg
			15mΩ				2.2 ±0.25		77mg
			NEW 2mΩ				0.58±0.15		63mg
			NEW 3mΩ				0.45±0.15		48mg
			NEW 4mΩ				0.34±0.15		64mg
			5mΩ			0.51±0.15	1.1 ±0.25		55mg
			NEW 6mΩ				0.5 ±0.15		55mg
MLP63			NEW 7mΩ				0.6 ±0.25		43mg
			NEW 8mΩ				1.1 ±0.25		40mg
			NEW 9mΩ			0.35±0.15	0.8 ±0.25		40mg
			10mΩ				0.5 ±0.25		41mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance Code 10 ⁻⁶ /°C			
RLP16	1608 (0603)	0.33	5.7	10mΩ	N ±70 K ±100	F(±1%) J(±5%)	100	-55~+155
RLP20	2012 (0805)	0.5	7.0	10mΩ	N ±70 K ±100			
RLP32	3216 (1206)	1	31.6	1mΩ	N ±70 K ±100 - ±150			
					N ±70 K ±100			
					N ±70 - ±150			
RLP63	6332 (2512)	2	44.7	1mΩ	N ±70 K ±100 - ±150			
					N ±70 K ±100			
					N ±70 K ±100			
MLP63		2	31.6, 25.8, 22.3, 20.0, 18.2, 16.9, 15.8, 14.9, 14.1	2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N ±70 K ±100 - ±150			
					N ±70 K ±100			
					N ±70 K ±100			

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation})/(\text{Rated Resistance})}$
 Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
 Note3. Please contact Kamaya Sales Dept. for any other resistance values.

● Part Number Description

Example

Example

Style		K		R005		F		TE				
<div><div>RLP</div><div>63</div></div>												
Product Type		Size		Rated Resistance		Tolerance on Rated Resistance		* Packaging & Standard Qty. (Min.)				
RLP		Code	Metric	Inch	e.g.: R001=1mΩ R010=10mΩ		F ±1% J ±5%		TP	Paper Tape	5,000pcs.	RLP16 RLP20 RLP32
MLP		16	1608	0603								
		20	2012	0805								
		32	3216	1206								
		63	6332	2512					TE	Embossed Tape	4,000pcs.	RLP63 MLP63


*Refer to Tape and Packaging information on page 22 and 23.

RLP, MLP

●Rated Resistance

Style	Resistance	Marking
RPL16	10mΩ	No Marking
RPL20	10mΩ	10
RLP32	1mΩ	01
	2mΩ	02
	3mΩ	03
	4mΩ	04
	5mΩ	05
	6mΩ	06
	7mΩ	07
	8mΩ	08
	9mΩ	09
	10mΩ	10
RLP63	12mΩ	12
	13mΩ	13
	15mΩ	15
	1mΩ	R001
	2mΩ	R002
	3mΩ	R003
	4mΩ	R004
	5mΩ	R005
	6mΩ	R006
	7mΩ	R007
MLP63	8mΩ	R008
	9mΩ	R009
	10mΩ	R010
	2mΩ	R002
	3mΩ	R003
	4mΩ	R004
	5mΩ	R005
	6mΩ	R006
	7mΩ	R007
	8mΩ	R008

●Recommended land Pattern



Style	Metric	Inch	Rated Resistance	A	B	X	Y			
RPL16	1608	0603	10mΩ	1.0	2.2	0.8	0.6			
RPL20	2012	0805	10mΩ	0.8	2.7	1.35	0.95			
RLP32	3216	1206	1mΩ	1.0	3.9	1.7	1.45			
			2mΩ	2.1			0.9			
			3mΩ	0.8			1.4			
			4mΩ	1.0			1.45			
			5mΩ	1.4			1.25			
			6mΩ							
			7mΩ							
			8mΩ							
			9mΩ							
			10mΩ	2.1			0.9			
			12mΩ							
			13mΩ							
			15mΩ							
			RPL63	6332			2512	1mΩ	2.0	7.6
2mΩ	1.8	2.9								
3mΩ										
4mΩ										
5mΩ	2.4	2.6								
6mΩ	4.0	1.8								
7mΩ										
8mΩ										
9mΩ										
10mΩ										
12mΩ										
15mΩ										
MLP63					2mΩ	1.8		2.9		
					3mΩ					
					4mΩ					
			5mΩ	4.0	1.8					
			6mΩ							
			7mΩ							
			8mΩ							
			9mΩ							
			10mΩ							

*Values for reference

RAC





Halogen Free

Antimony Free

●Features

High-density SMD packaging contributes higher productivity and reduces assembly costs. Please refer to Specification (Reference) at the Website to confirm the specification for more detail. Walsin Technology Corporation OEM products are also available.

●Dimensions

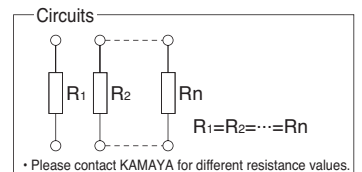

Note. Please contact KAMAYA for the detail of marking on the over coating.

Style	Terminal Style	Product	L	W	H	Q1	*Q2	a	b	*P	Unit weight/pc.
RAC102D	C	KAMAYA	1.0±0.05	1.0±0.05	0.35±0.05	—	0.33±0.10	0.15±0.10	0.25 ^{+0.05} _{-0.10}	0.65	1.1mg
		WALSIN	1.0±0.1	1.0±0.1	0.35±0.10	—	0.34±0.05	0.2±0.15	0.25±0.17		
RAC104D	C	KAMAYA	2.0±0.1	1.0±0.1	0.35±0.05	0.35±0.1	0.45±0.10	0.15±0.10	0.25±0.10	0.5	2.1mg
		WALSIN	2.0±0.1	1.0±0.1	0.45±0.10	0.3±0.05	0.4±0.1	0.2±0.1	0.25±0.10		
RAC164D	C	KAMAYA	3.2±0.1	1.6±0.1	0.5±0.1	0.4±0.15	0.6±0.15	0.3±0.2	0.25±0.15	0.8	7mg
		WALSIN	3.2±0.1	1.6±0.1	0.5±0.1	0.4±0.1	0.6±0.1	0.3±0.1	0.3±0.2		
RAC168D	C	WALSIN	3.8±0.1	1.6±0.1	0.45±0.1	0.3±0.1	—	0.3±0.1	0.3±0.1	0.5	8.3mg

*Values for reference

●Ratings

Style	Rated Dissipation at 70°C	Rated Current of Jumper	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10°C	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
RAC102D	0.125	1.0	10Ω~1MΩ	J(±5%)	±200	25	E24	50	-55~+125
RAC104D	0.25			F(±1%)(J(±5%))		50		100	
RAC164D	0.25			J(±5%)		25			
RAC168D	0.25								


Note1. Rated Voltage = √(Rated Dissipation) × (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

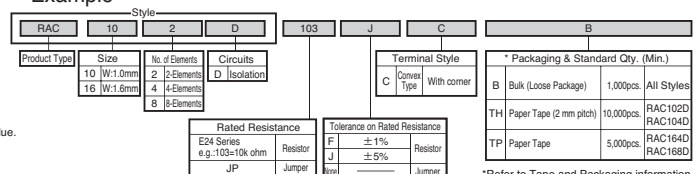

*Refer to Tape and Packaging information on pages 22 and 23.



RAC101A

Halogen Free

Antimony Free

- **Features** Suitable for use at DC and up to UHF band frequencies.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions



Style	Terminal Style	L	W	H	Q	a	b	P	*Unit weight/pc.
RAC101A	C	1.0±0.1	1.0 ^{+0.10} ₀	0.35±0.1	0.33±0.10	0.15±0.10	0.25±0.10	0.65±0.10	1.1mg

Unit : mm

*Values for reference

Dot mark on Termination 1
Attenuation factor on Termination 2 to 3


● Ratings

Style	Characteristic Impedance	Attenuation Factor		Tolerance on Attenuation Factor dB	Voltage Standing Wave Ratio	Frequency Range	Rated Input Power mW/package	Category Temperature Range °C
		symbol	dB					
RAC101A	50 ohm	1	1	±0.3	1.2max.	DC ≤ f ≤ 3GHz	100	-40 ~ +125
		2	2					
		3	3					
		4	4					
		5	5					
		6	6	±0.4				
		7	7					
		8	8					
		9	9					
		A	10					

Note. The following information is available.
1. Test methods for Attenuation Factor and VSWR characteristics.

● Part Number Description

Example

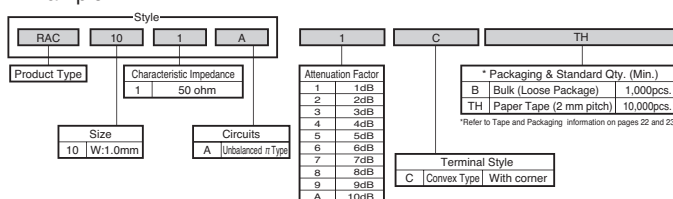

LTC


Halogen Free

Antimony Free

Pb Free

- **Features** Linearity of resistance change in wide temperature range.
Suitable for temperature compensation, temperature sensing and controlling, and circuit protection applications.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

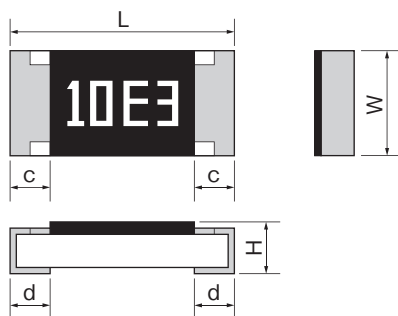

Rated resistance and T.C.R. value are marked with 4-digit on the over coating.
e.g. 10E3... 10 : 1,000 × 10⁻⁶/°C
E3 : 1.5k ohm

Please contact KAMAYA Sales department for further information.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
LTC1/10	2012	0805	2.0±0.15	1.25 ^{+0.10} _{-0.05}	0.6±0.1	0.4 ±0.2	0.3 ^{+0.2} _{-0.1}	5mg
LTC1/8	3216	1206	3.1±0.1	1.55±0.10	0.6±0.1	0.45±0.20	0.3 ^{+0.2} _{-0.1}	9mg

Unit : mm

*Values for reference


● Ratings

Temperature Coefficient of Resistance 10 ⁻⁴ /°C	Resistance Temperature Coefficient Tolerance		Rated Resistance Range (Rated Dissipation at 70°C)		Tolerance on Rated Resistance	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
	Code		LTC1/10 (0.1W)	LTC1/8 (0.125W)				
500	05	±100 × 10 ⁻⁴ /°C	100 ohm~5.1k ohm	100 ohm~10k ohm	J(±5%)	E24	100	-40~+125
800	08	±150 × 10 ⁻⁴ /°C	100 ohm~5.1k ohm	100 ohm~10k ohm				
1,000	10	±150 × 10 ⁻⁴ /°C	100 ohm~5.1k ohm	100 ohm~10k ohm				
1,500	15	±15%	100 ohm~3.3k ohm	100 ohm~4.7k ohm				
2,000	20		100 ohm~3.3k ohm	100 ohm~4.7k ohm				
2,400	24		100 ohm~1.6k ohm	100 ohm~2.2k ohm				
2,800	28		100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,000	30		100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,300	33	±10%	100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,600	36		51 ohm~910 ohm	51 ohm~1.2k ohm				
3,900	39		51 ohm~560 ohm	51 ohm~910 ohm				
4,200	42		33 ohm~360 ohm	33 ohm~470 ohm				
4,500	45		33 ohm~300 ohm	33 ohm~180 ohm				

Note1. Rated Voltage = √((Rated Dissipation) × (Rated Resistance)). (d.c. or a.c. r.m.s. Voltage)
Note2. Listed above will be made by order. Please contact KAMAYA for further information.

● Part Number Description

Example

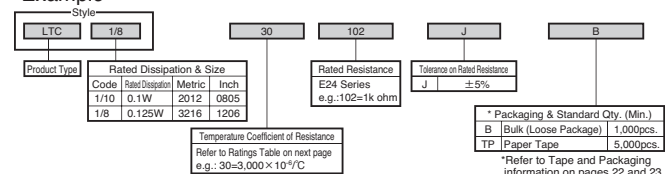

FRC


Halogen Free

Antimony Free

●Features

Suitable for battery circuit and power supply circuit.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

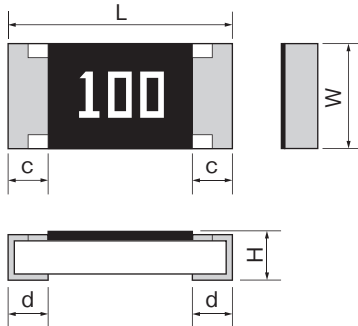

Rated resistance value is marked with 3-digit on the over coating

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FRC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3±0.1	2.2mg
FRC20	2012	0805	2.0±0.1	1.25±0.10	0.6 ±0.1	0.4±0.2	0.4±0.2	6mg
FRC32	3216	1206	3.2±0.2	1.6 ±0.15	0.6 ±0.1	0.5±0.25	0.5±0.25	10mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation W	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻⁶ /°C	Preferred Number Series for Resistors	Fusing Characteristic		Maximum open-circuit voltage	Category Temperature Range °C
							Applied Power	Fusing Time		
FRC16	1608 (0603)	0.063	3.9Ω~51Ω	J(±5%)	±500	E24	1.89W	30s max.	50V	-55~+125
FRC20	2012 (0805)	0.1	1Ω~51Ω		±1,000		2.0W			
FRC32	3216 (1206)	0.125	1Ω~51Ω 56Ω~100Ω		±500		2.5W			

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)


Note2. Contact us for further information on other style, resistance and pre-arcing time-current characteristic than those mentioned above.

Note3. Contact us for information when inrush and surge voltage are supposed to be applied.


Note4. Maximum open circuit voltage is the value of voltage applicable to both ends of resistors, when a resistor is open condition in a circuit.
This voltage shall be corresponding to 1,000 times the rated dissipation or maximum open circuit which is the less severe.

●Part Number Description

Example

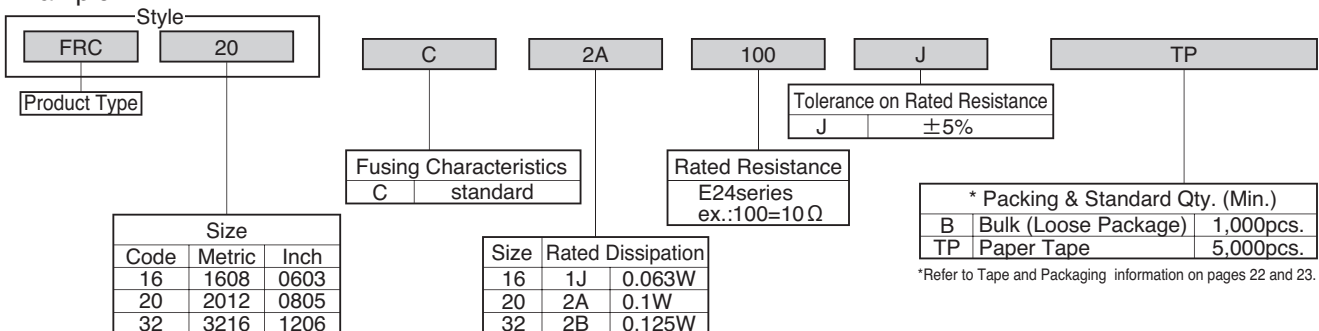

●Example of Typical Fusing Characteristics

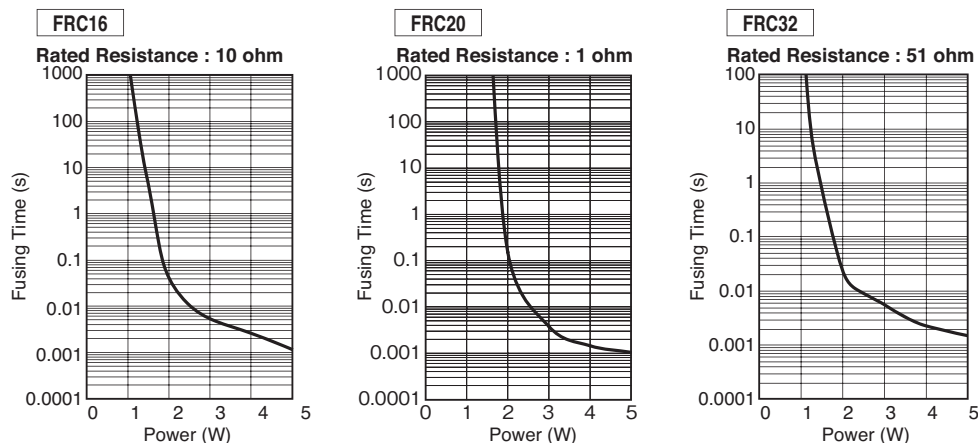

FCC,FHC

Halogen Free

Antimony Free


Pb Free

●Features

Fast-Acting Type. Suitable for over-current protection of the circuit of miniature portable equipment.
Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
We can provide Application Guide for FCC,FHC selection.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail. Certified UL, c-UL. File No. : E176847



●Dimensions

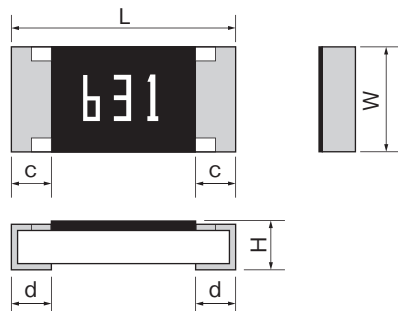

Current value is marked on the cover coating.
Please refer to Ratings table as below.

●Ratings/Option Code : AD, AB, AA

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCC10	1005	0402	1.0±0.05	0.5 ±0.05	0.4 ±0.05	0.2±0.1	0.25±0.10	0.8mg
FHC10								
FCC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.15	0.3 ±0.1	2mg
FHC16								
FCC20	2012	0805	2.0±0.1	1.25±0.10	0.6 ±0.1	0.4±0.2	0.4 ±0.2	6mg
FHC20								
FCC32	3216	1206	3.2±0.2	1.6 ±0.15	0.6 ±0.1	0.5±0.25	0.5 ±0.25	10mg
FHC32					0.65±0.10			11mg

Unit : mm

●Ratings/Option Code : LB

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCC10	1005	0402	1.0±0.05	0.5 ±0.05	0.35 Max.	0.2±0.1	0.25±0.10	0.6mg

*Values for reference

●Ratings/Option Code : AD (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time/Current Characteristics	Working Temperature Range ℃	
Metric	Inch		Code	A						
1005	0402	FCC10	151	0.15	2,700	O	32Vd.c. 35A	Rated Current × 250% Opening Time 5s max.	— 55 ~ + 125	
			201	0.2	1,000	Z	30Vd.c. 35A			
			251	0.25	750	C				
			321	0.315	620	D				
			401	0.4	340	E				
			501	0.5	290	F				
			631	0.63	210	I				
			801	0.8	150	K				
			102	1.0	120	L	24Vd.c. 35A			
		132	1.25	90	M					
		162	1.6	55	N					
		202	2.0	40	S					
252	2.5	36	T							
322	3.15	26	U							
1608	0603	FCC16	151	0.15	4,000	OD				50Vd.c. 35A
			201	0.2	1,800	ZD	36Vd.c. 35A			
			251	0.25	1,000	CD				
			321	0.315	750	DD				
			401	0.4	330	ED				
			501	0.5	280	FD				
			631	0.63	200	ID				
			801	0.8	130	KD				
			102	1.0	110	LD				
			132	1.25	85	MD				
			162	1.6	70	ND				
			202	2.0	55	SD				
252	2.5	45	TD	32Vd.c. 35A						
2012	0805	FHC16	322	3.15	26	UD	24Vd.c. 35A			
			402	4.0	19	XD				
			FCC20	401	0.4	330	401			50Vd.c. 50A
				501	0.5	270	501			
				631	0.63	190	631			
				801	0.8	130	801			
				102	1.0	100	102			
				132	1.25	80	132			
				162	1.6	65	162			
		202		2.0	55	202				
		252		2.5	40	252				
		FHC20	322	3.15	26	UD	32Vd.c. 50A			
402	4.0		19	XD	24Vd.c. 50A					
502	5.0		14	YD						
3216	1206	FCC32	201	0.2	1,800	201	64Vd.c. 50A			
			251	0.25	1,000	251				
			321	0.315	750	321				
			401	0.4	350	401				
			501	0.5	295	501				
			631	0.63	200	631				
			801	0.8	140	801				
			102	1.0	110	102				
			132	1.25	85	132				
			152	1.5	78	152				
			162	1.6	75	162				
			202	2.0	65	202				
FHC32	252	2.5	45	252	32Vd.c. 50A					
	322	3.15	26	UD						
	402	4.0	19	XD						
	502	5.0	14	YD						


●Features

Option code : AB, WB / Low internal resistance compared with FCC/FHC16 AB series for low power consumption and voltage dropping.
Option code : AH, WH / High anti pulse performance.
New line up Option code WB, WH for 0603size.
Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
We can provide Application Guide for FMC16 selection.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

Certified UL, c-UL. File No. : E176847



●Dimensions



Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FMC10	1005	0402	1.0±0.05	0.5±0.05	0.38±0.05	0.2±0.1	0.25±0.10	0.6mg
FMC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.15	0.3 ±0.1	2mg

*Values for reference

●Ratings/Option Code : AB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range ℃
Metric	Inch		Code	A						
1005	0402	FMC10	501	0.5	240	F	24Vd.c. 35A	Rated Current × 100%	Opening time 4h Min.	-55~ +125
			751	0.75	140	A				
			102	1.0	95	L				
			132	1.25	73	M				
			152	1.5	60	H				
			202	2.0	41	S				
			252	2.5	32	T				
1608	0603	FMC16	302	3.0	25	R	32Vd.c. 35A	× 200%	5s Max.	
			501	0.5	260	F				
			751	0.75	140	A				
			102	1.0	110	L		× 300%	0.2s Max.	
			132	1.25	80	M				
			152	1.5	65	H				
			202	2.0	45	S				
			252	2.5	32	T				
			302	3.0	26	R				
			402	4.0	18	X				
502	5.0	14	Y							

●Ratings/Option Code : AH (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range ℃
Metric	Inch		Code	A				Rated Current	Opening time	
1608	0603	FMC16	501	0.5	400	HF	32Vd.c. 35A	× 100%	4h Min.	-55~ + 125
			631	0.63	300	HI				
			751	0.75	210	HA				
			801	0.8	180	HK				
			102	1.0	115	HL				
			132	1.25	90	HM				
			152	1.5	70	HH				
			162	1.6	60	HN				
			202	2.0	50	HS				
			252	2.5	37	HT				
			302	3.0	28	HR				
			322	3.15	26	HU				
			402	4.0	18	HX				
			502	5.0	14	HY				

FMC Option Code : AB, WB / Low Ohm & Fast Acting
Option Code : AH, WH / In-rush Withstand

●Ratings/Option Code : WB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range ℃							
Metric	Inch		Code	A													
1608	0603	FMC16	501	0.5	260	F	32Vd.c. 35A	<table><tr><td>Rated Current</td><td>Opening time</td></tr><tr><td>× 100%</td><td>4h Min.</td></tr><tr><td>× 200%</td><td>5s Max.</td></tr><tr><td>× 300%</td><td>0.2s Max.</td></tr></table>	Rated Current	Opening time	× 100%	4h Min.	× 200%	5s Max.	× 300%	0.2s Max.	-55~+125
			Rated Current	Opening time													
			× 100%	4h Min.													
			× 200%	5s Max.													
			× 300%	0.2s Max.													
			751	0.75	140	A											
			102	1.0	110	L											
			132	1.25	80	M											
			152	1.5	65	H											
			202	2.0	45	S											
252	2.5	32	T														
302	3.0	26	R														
402	4.0	18	X														
502	5.0	14	Y														

●Ratings/Option Code : WH (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics	Working Temperature Range ℃
Metric	Inch		Code	A					
1608	0603	FMC16	501	0.5	400	○F	32Vd.c. 35A	<div>Rated CurrentOpening time</div> <div>× 100%4h Min.</div> <div>× 200%5s Max.</div> <div>× 300%0.2s Max.</div>	-55~+125
			631	0.63	300	○I			
			751	0.75	210	○A			
			801	0.8	180	○K			
			102	1.0	115	○L			
			132	1.25	90	○M			
			152	1.5	70	○H			
			162	1.6	60	○N			
			202	2.0	50	○S			
			252	2.5	37	○T			
			302	3.0	28	○R			
			322	3.15	26	○U			
			402	4.0	18	○X			
502	5.0	14	○Y						

●Recommended Derating for Rated Current


•Nominal Derating

Nominal Derating ≤ 75% of Rated Current

•Temperature Derating


Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If FMC16 102AB (Rated Current 1.0A) is used under ambient temperature 70℃,
Kamaya recommends, less than the current value derated as below,
Rated Current : 1.0A × (Nominal Derating : 75% × Temperature Derating : 80%) = 0.6A

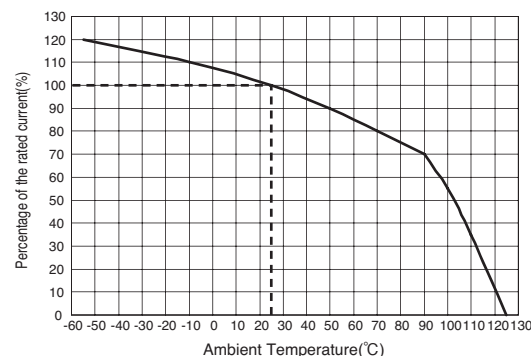

●Part Number Description

Example

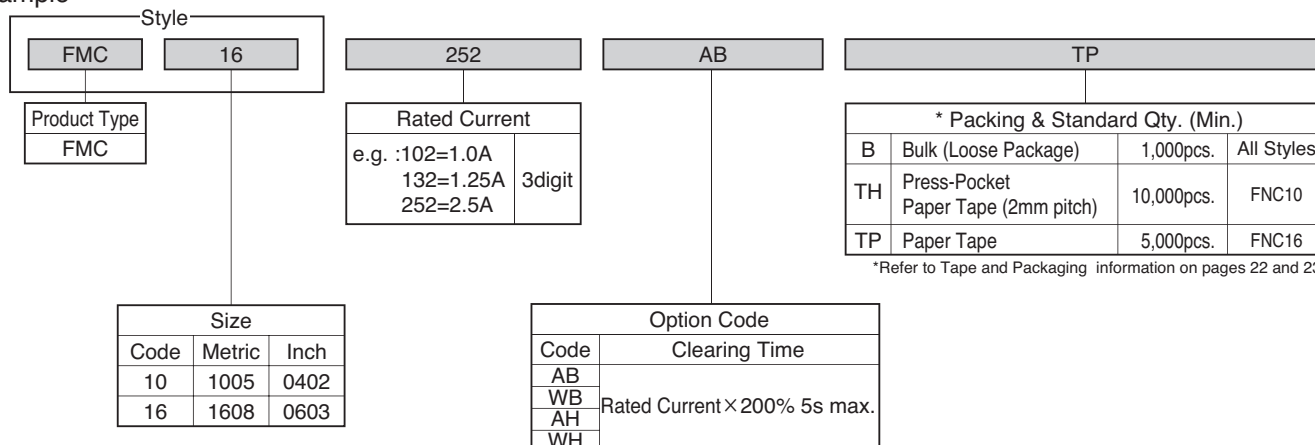

●Features

Suitable for over-current protection of the circuit of miniature portable equipment.
Low internal resistance compared with FCCR10AB series for low power consumption and voltage dropping.


e.g.) FCCR10 201AB : 1100m Ω Typ
FCCR10 201AB(In-line product) : 1850m Ω Typ
FCCR16 401AB : 358m Ω Typ
FCCR16 401AB(In-line product) : 590m Ω Typ

Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

Certified UL, c-UL. File No. : E176847



●Dimensions



Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCCR10	1005	0402	1.0±0.05	0.5±0.05	0.4 ±0.05	0.2±0.1	0.25±0.10	0.8mg
FCCR16	1608	0603	1.6±0.1	0.8 ^{+0.15} / _{-0.05}	0.45±0.10	0.3±0.15	0.3 ±0.1	2mg

*Values for reference

●Ratings/Option Code : AB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time / Current Characteristics	Working Temperature Range ℃
Metric	Inch		Code	A					
1005	0402	FCCR10	151	0.15	1850	∩	24Vd.c. 35A	Rated Current × 200% Opening time 5s Max.	−55~+125
			201	0.2	1250	Z			
			251	0.25	880	C			
			321	0.315	600	D			
			401	0.4	400	E			
			501	0.5	300	F			
1608	0603	FCCR16	401	0.4	450	EB	50Vd.c. 50A		
			501	0.5	300	FB			
			631	0.63	220	IB			
			751	0.75	190	AB			
			801	0.8	165	KB			
			102	1.0	130	LB			
			132	1.25	110	MB			
			152	1.5	90	HB			
			162	1.6	75	NB			
			202	2.0	65	SB			
			252	2.5	40	TB			

●Recommended Derating for Rated Current

•Nominal Derating


Nominal Derating ≤ 75% of Rated Current

•Temperature Derating

Please refer to the following graph regarding the current derating value for ambient temperature.


Ex.) If FCCR10 501AB (Rated Current:0.5A) is used under ambient temperature 70°C,
Kamaya recommends, less than the current value derated as below,

Rated Current : 0.5A × (Nominal Derating : 75% × Temperature Derating : 100%) = 0.375A

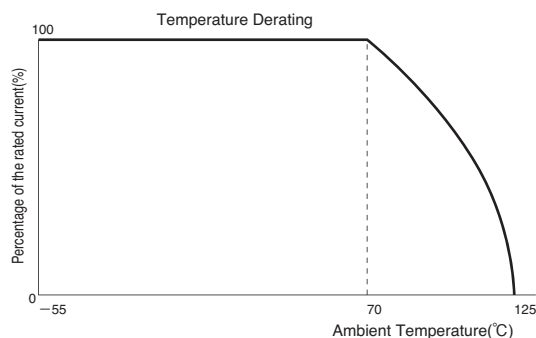

●Part Number Description

Example

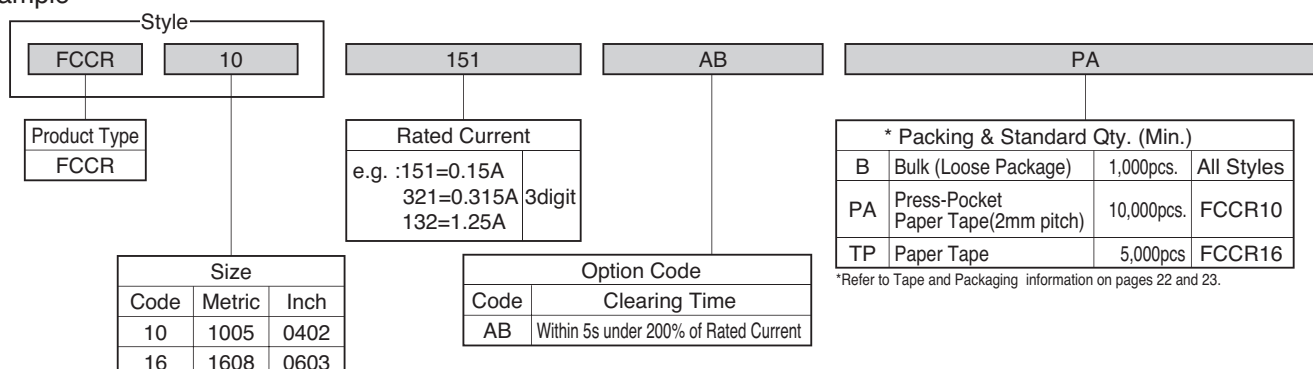

SBF32 Slow Blow

Halogen Free

Antimony Free


Pb Free

●Features

"Slow Blow" ensure high anti pulse performance.
Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
We can provide Application Guide for SBF32 selection.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

Certified UL, c-UL. File No.: E176847



Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
SBF32	3216	1206	3.2±0.2	1.6±0.15	0.65±0.10	0.5±0.25	0.5±0.25	10mg

*Values for reference

●Option Code:AS(Slow Blow type)

Size		Style	Rated Current		Internal Resistance m ohm typ.	Mark	Interrupting Rating	Electrical Characteristics			Working Temperature Range ℃
Metric	Inch		Code	A				Rated Current	Opening time		
3216	1206	SBF32	102	1.0	130	S10	63Vd.c. 50A	×100%	4h		-55~+125
			132	1.25	94	S13			Min.		
			152	1.5	68	S15			Max.		
			202	2.0	40	S20			—		
			252	2.5	30	S25	32Vd.c. 50A	×200%	1s		
			302	3.0	24	S30			120s		
			402	4.0	15	S40			3.0s		
			502	5.0	12	S50		×300%	0.02s		
			602	6.0	10	S60			0.05s		
			702	7.0	7	S70		×800%	0.0015s		
			802	8.0	6	S80					

●Recommended Derating for Rated Current

•Nominal Derating


Nominal Derating ≤ 75% of Rated Current

•Temperature Derating

Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If SBF32 102AS (Rated Current 1.0A) is used under ambient temperature 70°C,
Kamaya recommends, less than the current value derated as below.

Rated Current : 1.0A × (Nominal Derating : 75% × Temperature Derating : 80%) = 0.6A

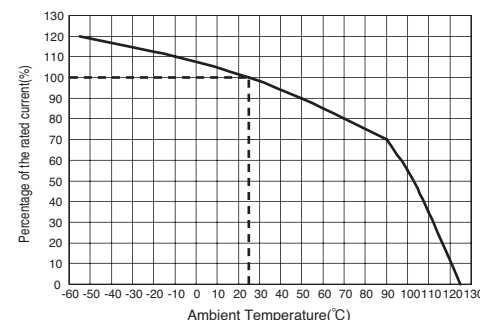

●Part Number Description

Example

Example

Style		402	AS	TP
SBF	32			
Product Type		Rated Current	Option Code	Packing & Standard Qty. (Min.)
SBF		e.g. :252=2.5A 402=4.0A 802=8.0A	Code	B Bulk (Loose Package)
		3digit	Clearing Time	TP Paper Tape
			AS Rated Current×200% : 1s min~120s. max.	1,000pcs.
				5,000pcs.
Size				
Code	Metric	Inch		
32	3216	1206		

*Refer to Tape and Packaging information on pages 22 and 23

*Refer to Tape and Packaging information on pages 22 and 23.

Support of Chip Fuse Selection

We would like to support the customer to find the appropriate Kamaya chip fuse if the following conditions of usage are provided.
Please contact kamaya Sales Dept for details.

- The item you would like to check.
- Circuit Voltage:Max voltage value of circuit mounting fuses.
- Steady-State Current:Current value flown fuses on normal condition.
- Ambient Temperature:Temperature around fuses.
- Wave form (In-rush Current) : It rapidly flows on circuit when power supply is turned on.
- We can provide Application Guide for Fuse selection.

SPC10

Halogen Free

Antimony Free

Pb Free

●Features


Low capacitance 0402inch: 0.1pF Max.
Suitable for ESD protection of High Speed data lines.
High ESD Withstand, IEC61000-4-2 Lv4 8kV Contact Discharge

[Major application]

- PC, PC related equipment and peripherals
- Mobile Phone, PDA, Small portable devices
- Digital Video Camera, Digital Still Camera
- LCD TV, PDP TV, STB
- Game equipment etc.


Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions



Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
SPC10	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.2±0.1	0.25±0.10	0.6mg

Unit : mm
*Values for reference



●Ratings

Part Number	Size Metric (Inch)	Capacitance ^{Note.1} pF	ESD Characteristics				Rated ^{Note.4} voltage V	Leakage ^{Note.5} current μ A	Category ^{Note.6} Temperature Range °C
			Peak Voltage ^{Note.2} Code V		Clamp Voltage ^{Note.3} V	ESD pulse withstand Pulses			
SPC10	1005 (0402)	0.1 Max.	501	500 Max.	100 Max.	100 Min.	30 Max.	1 Max.	-55~+125
							50 Max.		

Note1. Capacitance : Measured at 25°C, 1MHz, 1V rms.

Note2. Peak voltage : Measured at IEC61000-4-2 8kV Contact Discharge.

Note3. Clamp voltage : Measured at IEC61000-4-2 8kV Contact Discharge, at 30ns.


Note4. Rated Voltage : The value of voltage that is applicable to each terminal of ESD suppressor without operation of suppressor.

Note5. Leakage Current : The value of current that ESD suppressor is impressed at rated voltage.

Note6. Category Temperature Range : Working Temperature Range of ESD suppressor.

●Part Number Description

Example

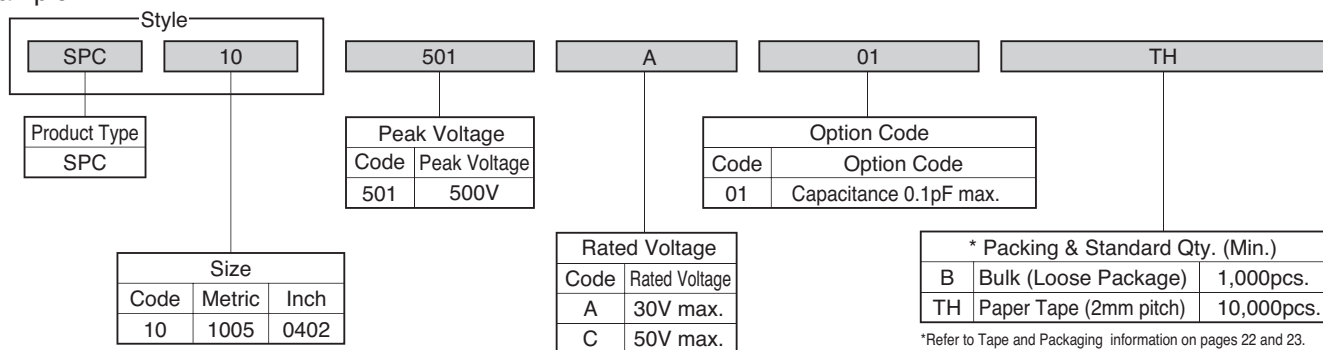

HSPC16


Halogen Free

Antimony Free

Pb Free

- **Features** High ESD protection performance(15kV) for automotive (Tight ESD spec requirement)
IEC61000-4-2 Air Discharge: $\pm 15\text{kV}$
[Major application]
Car audio, Car Navigation System etc.
Video Camera, DSC, Desk top-PC, Note PC etc.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.


●Dimensions

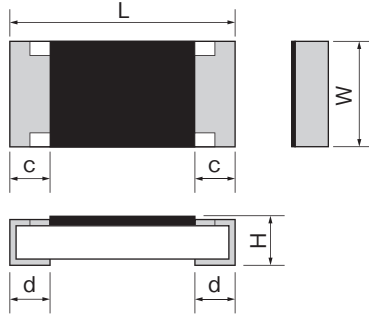

Style	Metric	Inch	L	W	H	c	d	Unit weight/pc.
HSPC16	1608	0603	1.6 ± 0.1	$0.8^{+0.15}_{-0.05}$	0.5 ± 0.10	0.3 ± 0.1	0.3 ± 0.1	2mg

Unit : mm

*Values for reference



●Ratings

Style	Size Metric (Inch)	Capacitance ^{Note.1} pF	ESD Characteristics				Rated vorage ^{Note.4} V	Leakage current ^{Note.5} μ A	Category Temperature ^{Note.6} Range °C
			Peak Voltage ^{Note.2} Code	V	Clamp Voltage ^{Note.3} V	ESD pulse withstand Pulses			
HSPC16	1608 (0603)	0.2 Max.	701	700 Max.	100 Max.	100 Min.	20 Max.	1 Max.	−55~+125

Note1. Capacitance : Measured at 25°C, 1MHz, 1V rms.

Note2. Peak voltage : Measured at IEC61000-4-2 15kV Air Discharge.

Note3. Clamp voltage : Measured at IEC61000-4-2 15kV Air Discharge, at 30ns.


Note4. Rated Voltage : The value of voltage that is applicable to each terminal of ESD suppressor without operation of suppressor.

Note5. Leakage Current : The value of current that ESD suppressor is impressed at rated voltage.

Note6. Category Temperature Range : Working Temperature Range of ESD suppressor.

●Part Number Description


Example

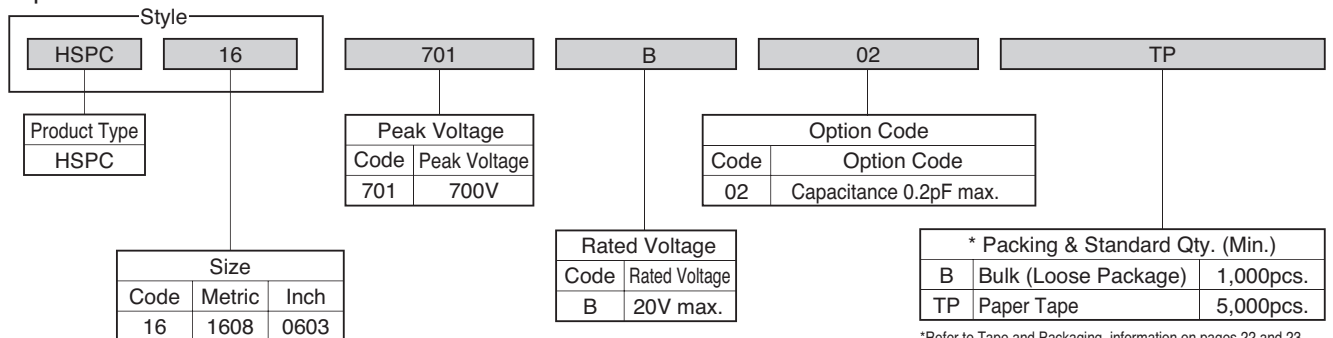

*Refer to Tape and Packaging information on pages 22 and 23.

Packaging for Surface Mount Devices

●Reel Dimensions


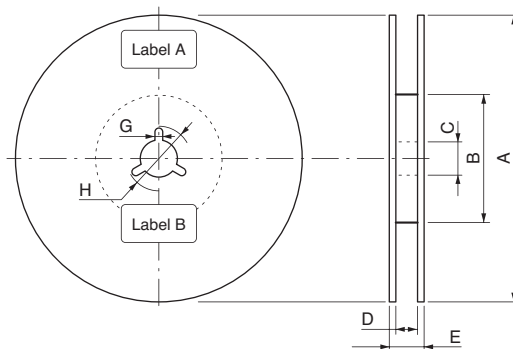


Unit : mm

	Code		A	B	C	D	E	G	H
Plastic Reel (EIAJ ET-7200B)	PA,TH,TP,TE (8 mm width)	Shoot molding	$\phi 180 \begin{smallmatrix} 0 \\ -1.5 \end{smallmatrix}$	$\phi 60 \begin{smallmatrix} +1 \\ 0 \end{smallmatrix}$	$\phi 13 \pm 0.2$	$9 \begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	11.4 ± 1.0	2 ± 0.5	$\phi 21 \pm 0.8$
		Vacuum molding					13.0 ± 1.0		
	TE (12 mm width)					$13 \begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	17.0 ± 1.0	—	

*Dimension A : Please contact KAMAYA for plastic reels of $\phi 250$ mm and $\phi 330$ mm.

●Tape Dimensions (Unit : mm)

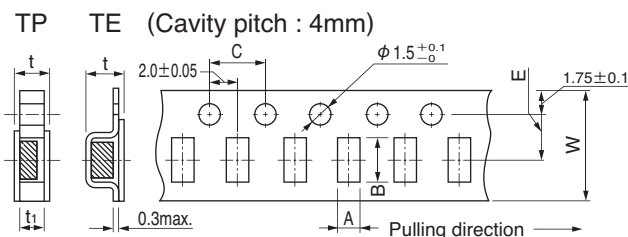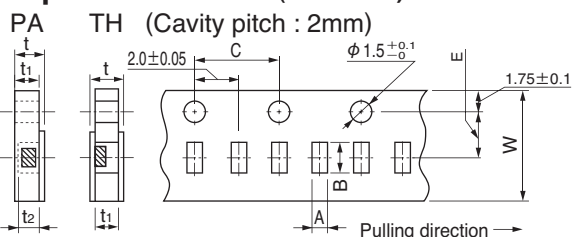

*Please contact Kamaya sales department for 1mm pitch cavity taping.

Metric	Inch	Style	Code	A	B	C	W	E	t ₁	t ₂	t
0402	01005	RMC1/32, RGC1/32	PA	0.24 ± 0.03	0.45 ± 0.03	4.0 ± 0.05	8.0 ± 0.2	3.5 ± 0.05	0.31 ± 0.03	0.15 ± 0.02	0.36 ± 0.03
0603	0201	RMC1/20, RGC1/20, RCC06, RNC06		0.37 ± 0.05	0.67 ± 0.05	4.0 ± 0.05			0.42 ± 0.03	0.27 ± 0.02	0.45 ± 0.05
		FCC10, FHC10, FCCR10		0.65 ± 0.10	1.15 ± 0.10				0.6 ± 0.05	0.5 ± 0.05	0.7 max.
1005	0402	RMC1/16S, RGC1/16S, RLC10, RCC10, FCC10(LB), FMC10, SPC10	TH	$0.65 \begin{smallmatrix} +0.05 \\ -0.10 \end{smallmatrix}$	$1.15 \begin{smallmatrix} +0.05 \\ -0.10 \end{smallmatrix}$	4.0 ± 0.1	8.0 ± 0.2	3.5 ± 0.05	0.4 ± 0.05	—	0.5 max.
		RMC1/16		1.15 ± 0.15	1.9 ± 0.2				0.6 ± 0.1	—	0.8 max.
1608	0603	RMC1/16, RGC1/16, FCR1/16, RVC16, RLC16, RHC16, RCC16, RLP16, FCC16, FHC16, FMC16, FRC16, HSFC16, FCCR16		1.15 ± 0.15	1.9 ± 0.2				0.6 ± 0.1	—	0.8 max.
2012	0805	RMC1/10, RGC1/10, FCR1/10, RNC20, RVC20, RPC20, RLC20, RHC20, LTC1/10, FCC20, FHC20, FRC20, RCC20, RLP20	TP	1.65 ± 0.15	2.5 ± 0.2	4.0 ± 0.1	8.0 ± 0.2	3.5 ± 0.05	0.8 ± 0.1	—	1.0 max.
				2.0 ± 0.15	3.6 ± 0.2				0.6 ± 0.1	—	
				2.0 ± 0.15	3.6 ± 0.2				0.8 ± 0.1	—	
3216	1206	RMC1/8, RGC1/8, FCR1/8, RNC32, RVC32, RPC32, RLC32, LTC1/8, FCC32, FHC32, SBF32, FRC32, RCC32, RLP32		2.0 ± 0.15	3.6 ± 0.2	4.0 ± 0.1	8.0 ± 0.2	3.5 ± 0.05	0.6 ± 0.1	—	1.0 max.
3225	1210	RMC1/4, FCR1/4, RPC35, RLC35		2.85 ± 0.20	3.5 ± 0.2				—	—	
5025	2010	RMC1/2, FCR1/2, RVC50, RPC50, RZC50, RLC50	TE	3.1 ± 0.2	5.5 ± 0.2		12 ± 0.3	5.5 ± 0.05	—	—	1.1 ± 0.15
6332	2512	RMC1, FCR1, RVC63, RPC63, RZC63, RLC63, RLP63, MLP63		3.6 ± 0.2	6.9 ± 0.2				—	—	
Chip Networks Chip Attenuators		RAC101A	TH	$1.15 \begin{smallmatrix} +0.05 \\ -0.10 \end{smallmatrix}$	$1.15 \begin{smallmatrix} +0.05 \\ -0.10 \end{smallmatrix}$	4.0 ± 0.1	8.0 ± 0.2	3.5 ± 0.05	$0.4 \begin{smallmatrix} +0.05 \\ -0.10 \end{smallmatrix}$	—	0.55 max.
		RAC102D		1.2 ± 0.1	2.2 ± 0.1				0.4 ± 0.1	—	0.5 max.
		RAC104D		1.9 ± 0.15	3.6 ± 0.2				0.6 ± 0.1	—	0.8 max.
		RAC164D	TP	1.9 ± 0.15	4.1 ± 0.15		8.0 ± 0.3				


PACKAGING FOR SURFACE MOUNT DEVICES

●Tape Dimensions

Metric	Inch	Style	Code	A	B	C	W	E	t ₁	t ₂	t
1005	0402	RMNW10, RMAW10, RNC10	TH	0.7 ±0.1	1.2±0.1	4.0±0.1	8.0±0.3	3.5±0.2	—	—	0.4 ±0.05
1608	0603	RMNW16, RMAW16, RNC16	TP	1.1 ±0.2	1.9±0.2				—	—	0.65±0.05
2012	0805	RMNW20, RMAW20		1.65±0.20	2.4±0.2				—	—	1.0 Max.
3216	1206	RMNW32, RMAW32		2.0 ±0.2	3.6±0.2				—	—	1.0 Max.
5025	2010	RMNW50	TE	2.8 ±0.2	5.5±0.2	12 ±0.3	5.5±0.1	—	—	—	1.2 Max.

*Value for reference

●Bulk Case (Code : BA) (Unit : mm)

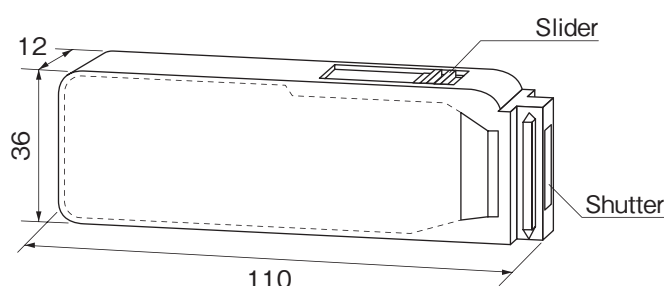

●Standard Packaging Quantities

Size		Bulk case (pcs./case)
Metric	Inch	
1608	0603	25,000
2012	0805	10,000
3216	1206	5,000

●Standard Packaging Quantities (Minimum Units)

Metric	Inch	Style	Tape & Reel					Bulk	
			Code	M. P. Q. (pcs./reel)	Outer Carton			Q' ty (pcs.)	
					Reel Q' ty (pcs.)	Gross Weight (kg)	Measurement (m³)		
0402	01005	RMC1/32, RGC1/32	PA	20,000	50	8.8	0.027	1,000*	
0603	0201	RMC1/20, RGC1/20, RCC06, RNC06		15,000		7.8			
1005	0402	FCC10, FHC10, FCCR10	TH	10,000		6.0			
		RMC1/16S, RGC1/16S, RLC10, RCC10 FMC10, SPC10, RNC10, RMNW10, RMAW10							
1608	0603	RMC1/16		8.3					
		RMC1/16, RGC1/16, FCR1/16 RVC16, RLC16, RHC16, RCC16, RLP16 FCC16, FHC16, FMC16, FRC16, HSPC16 FCCR16, RNC16, RMNW16, RMAW16		7.2					
		RMC1/10, RGC1/10, FCR1/10, RLP20 RNC20, RVC20, RPC20, RLC20, RHC20 LTC1/10, FCC20, FHC20, FRC20, RCC20 RMNW20, RMAW20	TP	5,000		8.4			
3216	1206	RMC1/8, RGC1/8, FCR1/8RNC32 RVC32, RPC32, RLC32, LTC1/8, FRC32 RCC32, RMNW32, RMAW32				8.8			
		RLP32, FCC32, FHC32, SBF32				10.0			
3225	1210	RMC1/4, FCR1/4, RPC35, RLC35	TE	4,000		7.7			
5025	2010	RMC1/2, FCR1/2, RVC50, RPC50 RZC50, RLC50, RMNW50				8.0			
6332	2512	RMC1, FCR1, RVC63, RPC63, RZC63 RLC63				40			10.4
		RLP63, MLP63							12.0
Chip Networks Chip Attenuators		RAC102D, RAC101A			TH	10,000			50
		RAC104D	6.3						
		RAC164D	TP	5,000	7.7				
		RAC168D			8.6				
									5,000

*Please contact Kamaya Sales department about bulk package of RLP16, RLP20, RLP32, RLP63, MLP63 .

Leaded Resistors

Pulse

KAMAYA OHM <http://www.kamaya.co.jp>


RC1/2U

- **Features** UL recognized component(UL1676) (File No.E151897).Reduce UL or CSA approval and maintenance cost. Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

UL recognized component (UL1676) (File No.E151897)



●Dimensions

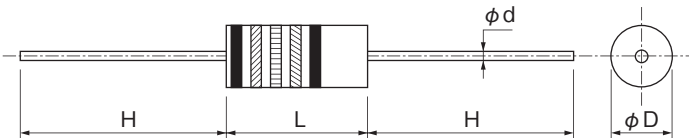

Unit : mm

Style	L	D	H	d	*Unit weight/pc.
RC1/2U	9.5 ^{+0.8} _{-0.7}	3.6±0.2	28±3	0.7 ^{+0.07} _{-0.05}	422mg

*Value for reference

●Ratings

Style	Rated Dissipation at 70°C W	Rated Voltage V	Rated Resistance Range	Tolerance on Rated Resistance and Performed Number Series for Resistors.	Specified Line Voltage	Isolation Voltage V	Category Temperature Range °C
RC1/2U	0.5	350	1M ohm~10M ohm	K(±10%) E12 M(±20%) E6	250Va.c. max. or 125Va.c. max.	500	-55~+125

Note1. Required characteristic performance is based on JIS C 6406 and UL 1676.

Note2. The name of this, product is granted as Conductive Path, but UL1676 and the requirements as Discharge Path shown in CSA22, 2 No.1-94 are satisfied, but the products performance does not cover all the requirements as Conductive Path.


●Part Number Description

Example

Style RC 1/2U	685	M	B
Product Type	Rated Dissipation 1/2U 0.5W	Rated Resistance E12, 6 Series e.g. : 685=6.8M ohm 106=10M ohm	Tolerance on Rated Resistance K ±10% M ±20%
			*Packaging B Bulk (straight) H Horizontal Forming TB 52 mm Width Tape (Ammo Box) TD 52 mm Width Tape (Reel)

*Refer to Tape and Packaging information on pages 25.


●Color Coding

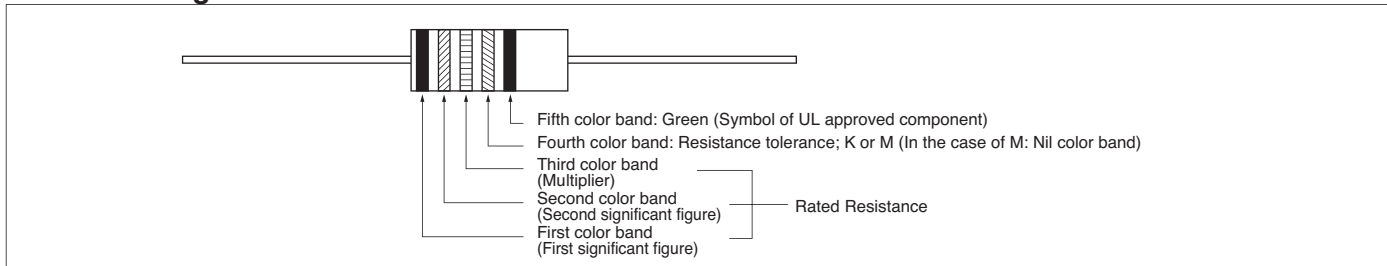

RC

- **Features** Improved pulse endurance characteristics compared to carbon-film devices. Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

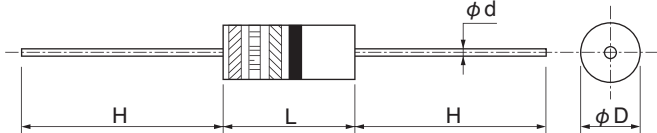

Unit : mm

Style	L	D	H	d	*Unit weight/pc.
RC1/4	6.3 ±0.7	2.4±0.1	30±3	0.6 ±0.05	222mg
RC1/2	9.5 ^{+0.8} _{-0.7}	3.6±0.2	28±3	0.7 ^{+0.07} _{-0.05}	422mg

*Values for reference

●Ratings

Style	Rated Dissipation at 70°C W	Limiting Element Voltage V	Rated Resistance Range	Combination of Rated Resistance Range and Temperature Coefficient of Resistance	Rated Resistance Range	Tolerance on Rated Resistance and Performed Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
RC1/4	0.25	250	1 ohm~5.6M ohm	+6.5~-0 +1~-5 +10~-0 0~-6 +13~-0 0~-7.5 +15~-0 0~-10 +20~-0 0~-15	1 ohm~1k ohm 1.1k ohm~10k ohm 11k ohm~100k ohm 110k ohm~1M ohm 1.1M ohm~22M ohm	J (±5%) E24 K (±10%) E12 M (±20%) E6	100 500	-55~+125
RC1/2	0.5	350	1 ohm~22M ohm					

Note1. Rated Voltage =√ (Rated Dissipation) × (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

Style RC 1/4	102	J	B
Product Type	Rated Dissipation 1/4 0.25W 1/2 0.5W	Rated Resistance E24, 12, 6 Series e.g. : 2R2=2.2 ohm 102=1k ohm	Tolerance on Rated Resistance J ±5% K ±10% M ±20%
			*Packaging B Bulk (Straight) H Horizontal Forming TB 52 mm Width Tape (Ammo Box) TD 52 mm Width Tape (Reel)


*Refer to Tape and Packaging information on pages 25.

- **Storage** Temperature 20±15°C, Humidity 60%R.H. Max, Recommendation Storing Term 6 months after shipped from factory.

RH

- **Features** Most suitable resistor for high-tension circuits in which high precision is required for example, the physical and chemical measurement equipment, X-ray apparatus, electron microscope, and etc.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

●Dimensions

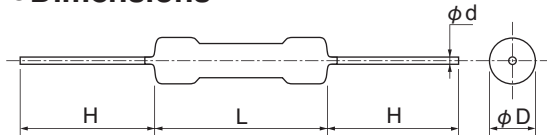

*Dimension "L" should be measured between both side of D/2.

Note. Please contact KAMAYA for the details of marking.

●Ratings

Style	Rated Dissipation W	Limiting Element Voltage kV	Maximum Overload Voltage kV	Pulse Voltage kV	Combination of Temperature Coefficient of Resistance and rated Resistance Range	Tolerance on Rated Resistance
RH 1	1.0	1.5	4	4	$1 \leq R \leq 500$ $500 < R \leq 5,000$	F (± 1%)
RH 2	2.0	5	12.5	7.5		G (± 2%)
RH 3	3.0	10	25	15		J (± 5%)
RH 4	4.0	15	30	20		K (± 10%)
RH 6	6.0	20	40	30		
RH 8	8.0	30	60	40		

Note1. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Unit : mm

Style	L	D	H	d	*Unit Weight/pc.
RH 1	14.5±1.0	4.0±1.0	38±3	0.8	950mg
RH 2	26.5±1.0	5.0±1.0	38±3	1.0	1,950mg
RH 3	39.0±2.0	5.0±1.0	38±3	1.0	2,410mg
RH 4	52.0±2.0	9.0±1.0	38±3	1.0	6,880mg
RH 6	77.0±2.0	9.0±1.0	38±3	1.0	9,290mg
RH 8	97.0±2.0	9.0±1.0	38±3	1.0	11,46g

*Values for reference

●Part Number Description

Example

Style	RH	8	D	500M	J	B
Product Type	Rated power	Rated Resistance	Temperature Coefficient of Resistance	Rated Resistance	Tolerance on Rated Resistance	Packaging
1	1.0W	K	$\pm 100 \times 10^{-4}/^{\circ}\text{C}$	Available on demand	F $\pm 1\%$	B
2	2.0W	D	$\pm 200 \times 10^{-4}/^{\circ}\text{C}$	e.g.: 100M=100M ohm	G $\pm 2\%$	Bulk
3	3.0W			1G00=1G ohm	J $\pm 5\%$	
4	4.0W				K $\pm 10\%$	
6	6.0W					
8	8.0W					

*Marking and label indication for Temperature Coefficient Resistance
HVD : $\pm 100 \times 10^{-4}/^{\circ}\text{C}$
HVS : $\pm 200 \times 10^{-4}/^{\circ}\text{C}$

Packaging for Leaded Resistors

●Tape

Unit : mm

Style	W	L1-L2	T	t	P	Z	S
RC1/4 RC1/2 RC1/2U	52.4 ^{+1.6} _{-1.4}	1.0max.	6.0±0.5	0.5max.	5.08±0.38	1.0max.	3.2min.

●Ammo Box

Unit : mm

Style	Code	a	b	c
RC1/4	TB	60±5		275±5
RC1/2 RC1/2U	52mm Width Tape	65±5	75±5	455±5

●Tape & Reel (Code : TD)

Unit : mm

Style	Code	A	*A'	B	C1	C2	d	*Y
RC1/4 RC1/2 RC1/2U	TD	260±5	280	75±5	60.4±1	78±1	14.5±0.5	3

*Value for reference

●Horizontal Forming (Code : H)

Unit : mm

Style	Code	A	B	t
RC1/4	H60	10.0±0.5		1.5max.
RC1/4	H62	12.5±0.5	5.0±0.5	
RC1/2 RC1/2U	H	15.0±0.5		1.8max.


Style	Tape & Reel					Ammo Box					Bulk Packaging				
	Q'ty / Reel (pcs.)	Reel Size (mm)	Outer Carton			Width of Taping (mm)	Q'ty / Box (pcs.)	Outer Carton			M.P.Q. (Q'ty / Plastic Bag pcs.)	Q'ty / Inner Carton (pcs.)	Outer Carton		
RC1/2U	3,000	260	Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m ²)	52	2,000	Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m ²)	500 (100×5)	5,000	Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m ²)
RC1/2	3,000	260	24,000	13	0.04	52	2,000	30,000	16	0.05	500 (100×5)	5,000	30,000	13	0.04
RC1/4	5,000	260	40,000	12	0.04	52	2,000	30,000	10	0.03	1000 (200×5)	10,000	50,000	13	0.04

Multilayer Ceramic Capacitor


Please see Catalog of Walsin Technology Corporation. (Website: <http://www.passivecomponent.com/>) for detail information.

●Features

1. General purpose, Board of PC etc.
2. Full support by Japanese Quality Assurance team.



●Dimensions



Unit: mm

Metric	Inch	L	W	T/Symbol	Ma	Series
1005	0402	1.0 ±0.05	0.5 ±0.05	0.5 ±0.05	N	0.25±0.05/-0.1
1608	0603	1.6 ±0.1	0.8 ±0.1	0.8 ±0.07	S	0.4 ±0.15
		1.6+0.15/-0.1	0.8+0.15/-0.1	0.8+0.15/-0.1	X	0.4 ±0.15
2012	0805	2.0 ±0.15	1.25±0.1	0.6 ±0.1	A	0.5 ±0.2
				0.8 ±0.1	B	0.5 ±0.2
				1.25±0.1	D #	0.4 ±0.2
		2.0 ±0.2	1.25±0.2	0.95max.	T #	0.5 ±0.2
				1.25±0.2	I #	0.5 ±0.2
				0.8 ±0.1	B	0.13max.
1632	0612	3.2 ±0.15	1.6 ±0.15	0.8 ±0.1	B	0.6 ±0.2
3216	1206	3.2 ±0.15	1.6 ±0.15	0.95max.	T #	0.6 ±0.2
				0.95±0.1	C	0.6 ±0.2
				1.15±0.15	J #	0.6 ±0.2
		3.2 ±0.2	1.6 ±0.2	1.25max.	J #	0.6 ±0.2
				1.25±0.1	D #	0.6 ±0.2
		3.2 ±0.15	1.6 ±0.15	1.6 ±0.2	G #	0.6 ±0.2
				1.6 ±0.2	G #	0.6 ±0.2
				1.6 ±0.2	G #	0.6 ±0.2
		3.2+0.3/-0.1	1.6+0.3/-0.1	1.6+0.3/-0.1	P #	0.6 ±0.2
				0.95max.	T #	0.75±0.25
				0.95±0.1	C #	0.75±0.25
				1.25±0.1	D #	0.75±0.25
3225	1210	3.2 ±0.3	2.5 ±0.2	0.5 ±0.25	OP	0.5 ±0.25
				0.75±0.25	General Purpose, High Voltage	0.5 ±0.25
				0.75±0.25	General Purpose, High Voltage	0.5 ±0.25
		3.2 ±0.4	2.5 ±0.3	1.6 ±0.2	G #	0.75±0.25
				2.5 ±0.3	M #	0.75±0.25
				1.25±0.1	D #	0.5 ±0.25
4520	1808	4.5 ±0.4	2.03±0.25	2.0 ±0.2	K #	0.5 ±0.25
				1.25±0.1	D #	0.75±0.25
				0.75±0.25	General Purpose, S2, S3	0.6 ±0.25
				2.0 ±0.2	K #	0.75±0.25
4532	1812	4.5 ±0.4	3.2 ±0.3	1.25±0.1	D #	0.75±0.25
				0.6 ±0.25	OP	0.6 ±0.25
				0.75±0.25	General Purpose, S2, S3	0.6 ±0.25
				2.0 ±0.2	K #	0.6 ±0.25

: Reflow soldering process only.

●Characteristic

Application	Series	Dielectric	Size	Rated Voltage	Capacitance
General Purpose	General Purpose	NPO, X7R, Y5V	0402(1005) 0603(1608)	16V, 25V, 50V, 100V	0.5pF~1uF
	High Capacitance	X7R, X5R, Y5V	0402(1005) 0603(1608)	6.3V, 10V, 16V, 25V, 50V	1uF~100uF
Safety and Power supply control	Middle & High Voltage	NPO, X7R, Y5V	0805(2012) 1206(3216)	200V, 250V, 500V, 630V 1kV, 1.5kV, 2kV, 3kV	0.5pF~0.22uF

●Part Number Description

Example General purpose
High Capacitance
Ultra-small
Middle & High Voltage
Low Inductance

Style	0805	B	104	K	500	C	T
Size	Inch (Metric)	Dielectric	Capacitance	Tolerance	Rated Voltage	Electrode	Package
0201= (0603)		N=NPO	R47=0.47pF	A = ±0.05pF	6R3=6.3 Vdc	L = Ag/Ni/Sn	B= Bulk
0402= (1005)		B=X7R	0R5=0.5pF	B = ±0.1pF	100=10 Vdc	C= Cu/Ni/Sn	C= Bulk case
0603= (1608)		X=X5R	1R0=1pF	C = ±0.25pF	160=16 Vdc		T= 7inch width Reale
0805= (2012)		F=Y5V	100=10pF	D = ±0.5pF	250=25 Vdc		
1206= (3216)			101=100pF	F = ±1%	500=50 Vdc		
1210= (3225)			102=1000pF	G = ±2%	101=100 Vdc		
1808= (4520)			103=0.01uF	J = ±5%	201=200 Vdc		
1812= (4532)			104=0.1uF	K = ±10%	251=250 Vdc		
			105=1uF	M = ±20%	501=500 Vdc		
			106=10uF	Z = -20to +80%	631=630 Vdc		
			107=100uF		102=1000 Vdc		
					152=1500 Vdc		
					202=2000 Vdc		
					302=3000 Vdc		


Example Low profile
Open-mode Design
High Q Low ESR
Microwave
Safety certified

Style	OP	21
Product Type	TT=	Size
	OP=	15=0402
	HH=	18=0603
	MW=	21=0805
	S2=	31=1206
	S3=	32=1210
		42=1808
		43=1812







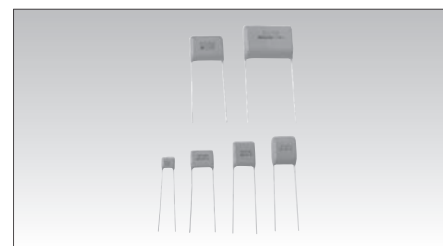






Film Capacitors

●Dipped metallized film capacitors

● CR Units



Film Capacitors Summary

Summary		Style	Series Code	Features	Rated Voltage	Capacitance (μF)	Temp. Range (°C)
General use	Standard		FPB NEW	• Small	250VDC 450VDC 630VDC 1250VDC	0.47~10 0.22~4.7 0.068~2.2 0.001~0.22	-40~ +85 (+105)
			MDX	• Standard	250VDC 450VDC 630VDC	0.01~10 0.01~4.7 0.01~2.2	-40~ +85 (+105)
			MDS	• Standard	100VDC 250VDC 400VDC 630VDC	0.56~10 0.18~10 0.039~4.7 0.01~2.2	-40~ +85 (+105)
			MDD	• Lead pitch 5mm, 7.5mm	50VDC 63VDC 100VDC 250VDC	0.1~2.2 0.1~1.0 0.047~0.47 0.01~0.15	-40~ +85 (+105)
	PFC circuit in power		FPA	• Small • High temperature proof	450VDC 550VDC	0.47~2.2	-40~ +85 (+110)
			FPS3 FPS	• Low Noise	450VDC	0.47~2.2	-40~+85 (+110) -40~+85 (+105)
	Large capacitance		MDL	• Miniature and Large capacitance • For high frequency and high ripple	35VDC 63VDC	4.7~22 10~22	-40~ +85 (+105)
	High voltage		MDD	• High voltage series • For AC and DC	1250VDC (500VAC)	0.0022~0.1	-40~ +85 (+105)
High frequency circuit use			FPD4	• Standard	250VDC 450VDC 630VDC	0.01~10 0.01~3.3 0.01~2.2	-40~ +85 (+105)
			FPD5	• Small	450VDC	0.47~2.2	-40~ +85 (+105)
Across- the- line use			CFD-N	• For Japan • For noise immunity test	125VAC 250VAC	0.033~4.7 0.01~2.2	-40~ +85 (+105)
Surge absorber C-R units			CR	• C-R Unit	125VAC 250VAC	0.1 μF +120 Ω 0.033 μF +120 Ω	-40~ +85
			CRKH	• C-R Unit • UL, VDE Safety Standard	275VAC	0.01~0.1 μF 47, 100, 120 Ω	-40~ +100

● Compliance with RoHS requirement

Our film capacitors (all products in the above list) comply with RoHS requirement.

About Nitsuko product, Please contact as follows.

Nitsuko Nitsuko Electronics Corporation <http://www.nitsuko-ele.co.jp/>

Development · Sales Department

2031-1, Ogawara, Suzaka-shi, Nagano-ken, Postcode 382-0071

TEL (+81) 26-246-6351 FAX (+81) 26-245-6239 E-Mail: ec@nitsuko-ele.co.jp

SMD Product handling manual

1. Scope

This product handling manual is applied to parts for the surface mounting that KAMAYA ELECTRIC CO., LTD. produce.

2. Storage

Consider the following four points for keeping the environment, the storage method, and the storage period to maintain the qualities of parts below.

2.1 Avoid storing in locations where corrosive gas is present (Sea breezes, Cl₂, H₂S, NH₃, SO₂, NO₂, etc.) or in dusty and moist circumstances. Otherwise, it may result in deterioration of performance and adversely affect the soldering.

2.2 Avoid keeping goods in high temperature and direct sunlight. Otherwise, it may cause deformation of packing materials, and adherence of parts on packing materials.

2.3 Please enforce First-In & First-Out for the use of parts in consideration of the change in the environmental condition.

2.4 Store these products in the following environment.

Temperature: 5 to 35°C

Humidity : 25 to 75%

Terms of guarantee: 2 years

3. Pattern Design

To solder parts on the printed circuit board properly, it is necessary to take a careful attention in design stage.

It is necessary to consider the land pattern position by mounting equipment, method of soldering (flow or reflow), and material of print circuit board. Moreover, it is necessary to consider the position of adhesive and the array of parts at the flow soldering. Refer to Page 30 for recommended land pattern of Kamaya product

3.1 Strength of parts might decrease under the condition that the width or the shape of land pattern is too large, or the bend of the substrate occurs when gap of soldering position is generated or there are a lot of solder quantities.

3.2 Interval of parts should not narrow too much for the short-circuit prevention.
In general, it is safer to open more than 0.5mm from the positioning accuracy of mounting.


3.3 The resistor is a generation of heat source.

The pattern design that opens enough distance is necessary from other generation of heat parts.

Especially, please do enough derating of the rated dissipation for a high voltage circuit after considering the temperature rises of the adjoining generation of heat parts.

3.4 When the flow soldering is executed, soldering differs depending on the direction where the printed circuit board is thrown.

Figure-1

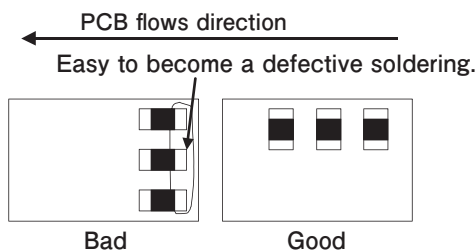


3.5 Examples of division of land pattern (Cross-sectional view)


- Land share with lead component.
- Mounted near Chassis.
- Side by side array.

Figure-2


a) Land share with lead component.

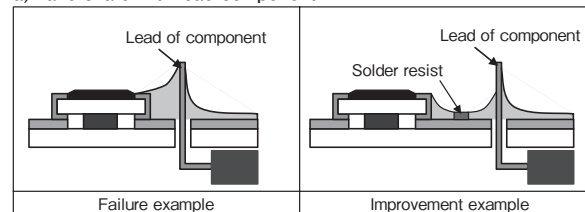

b) Mounted near chassis

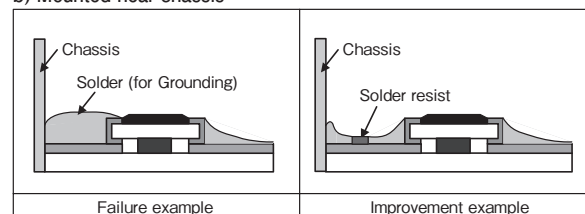

c) Side by side array

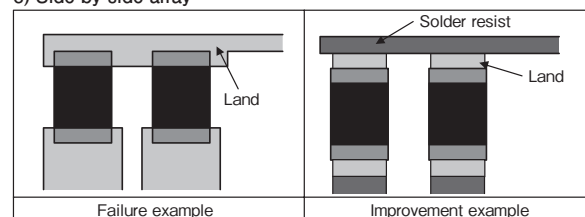


3.6 Avoid the component placement to the following places.

- Near cutting line of print circuit board.
- Place where print circuit board is distorted and mechanical stress is received easily.

Figure-3

Layout of resistors near the cutting line of print circuit board.

Improper A → B → C&D → Proper



4. Print Circuit Board

Please consider following respects.

4.1 Thermal diffusivity (thermal conductivity)

Thermal diffusivity through the print circuit board is necessary for generation of heat from parts.
Especially, use the print circuit board with high thermal conductivity when the calorific value is large.

4.2 Resistance to soldering heat

Select a heatproof, good substrate to soldering parts.
Because it often solders two or more times.

SMD PRODUCT HANDLING MANUAL

4.3 Pull peel strength of land pattern

Consider that the print circuit board corresponding to the land pattern size and sticking strength with the copper foil.

4.4 Bend strength

The stress in the electrodes and parts body, when the PCB bends by weight and external stress of parts, causes the joining electrode flaking off and the crack. Consider the bend ability of print circuit board.

5. Adhesive

When an adhesive is applied, the spread should be set corresponding to each part so that there are no overflow into the land or no dropout of the parts.

5.1 Strength of adhesive must be strong not to fall and move parts in the mounting process.

5.2 Stiffen at the low temperature as much as possible. Do not heat parts as the cure temperature.

5.3 Keep without stringy, slumping adhesion, and dewetting that solder can not adhere to parts.

5.4 After soldering, there must be no causticity.

6. Mounting

Please consider following to install parts in the printed circuit board.

- 1) Gap of installing position
- 2) Product floating from land pattern
- 3) Mechanical stress to overcoat of parts.

6.1 Do not touch with bare-handed in the electrode and wash it well with an organic solvent when the foreign body such as oils and fats adheres.

6.2 Mounting trouble of static electricity may occur when you touch or rub the part, packaging materials and the cover tape of the taping especially. When you deal with parts on the worktable, please execute the static electricity prevention measures (like the electrification prevention mat).

7. Soldering

7.1 The lead free is recommended in the solder paste.

Select appropriate solder paste after executing the evaluations of soldering and strength of bond, etc.


7.2 Select flux without the causticity.

7.3 The conditions of temperature and time should be well considered in the soldering process so that any warp or twist in the printed circuit board may not grow. Moreover, the electrode might flake off when the substrate is bent after it solders or the high impact is given parts or around it.

7.4 In VPS Reflow, preheat well so that the difference of temperature may not big too much between parts and inside of furnace. A big difference of temperature cause drop out of parts.

7.5 Do not rub the electrodes of resistor with soldering iron. The electrode may flake off when the iron is pressed on the electrode. Do not raise the temperature of the soldering iron more than necessary when the side electrode of parts is formed with the Ag resin.

Figure-4

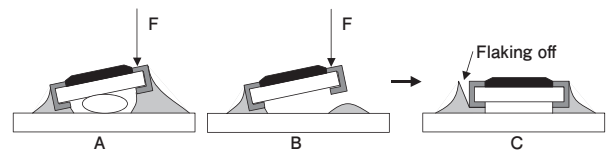

7.6 The overcoat and the main body may be chipped off when you hold the parts strongly with tweezers.

Do not use parts detached from the print circuit board once again.

7.7 Please refer to page 31 for our recommended soldering conditions.

8. Cleaning

The remaining of the flux on print circuit board with part mounted may cause a bad effect on humidity resistance and corrosion resistance. Please use a rosin flux with low chlorine-containing, or alcoholic and hydrocarbon solvent.

9. Other Notes

9.1 The use of the products mentioned in this catalog refers to consumer applications that are available on the open market.

9.2 There are cases which high levels of reliability distinctive from consumer applications sold on the open market are necessary for electrical components which are used in equipment that could effect human life or create huge social loss owing to defect in medical equipment, space equipment, nuclear power-related equipment, vehicle mounted equipment, aircraft and other equipment. When you examine the use in the above-mentioned equipment or for uses not mentioned within this catalog, ensure that you consult with our sales department prior to deployment.

9.3 As the use of resistors and surface-mounted parts used in all electrical components, especially resistors used in high-voltage circuits and in circuits prescribed for safely regulations, will be greatly affected by the circuit used, the method of mounting, the material, and environmental conditions, ensure that you consult with our sales department prior to deployment when examining the viability of use in characteristic circuits, mounting methods, material and under characteristic environmental conditions,

9.4 Thoroughly verify performance and reliability when using under the following characteristic environmental conditions :

- (1) Use under a liquid environment (Water, oil, liquid chemical, organic solution, etc.)
- (2) Use in direct sunshine. Outdoors in heavy dew, in dusty environments, or where corrosive gas is present (Sea breezes, Cl₂, H₂S, NH₃, SO₂, NO₂, etc.)
- (3) Use in environments with strong electrostatic or magnetic waves exists.
- (4) Use nearby flammable substances.
- (5) Use with the resistors coated in resin, etc.
- (6) Use of water or water solution for flux cleaning after unwashed soldering or soldering.
- (7) Use under environment of condensation

9.5 Ensure that the condition of the mounting is evaluated and verified on circuit boards when subjected to overloads in the form of pulses or surges, etc.

9.6 Take cares handling these products as they may be damaged and become defective if subject to impact, such as dropping.

SMD Product handling manual (RECOMMENDED LAND PATTERN)

Note: This land pattern is not supported by the mounting evaluation.


This is reference information only.

●Application

All KAMAYA Surface Mount Devices

●Recommended land pattern (Reference)

1. Square chip type (No. of terminals: 2)

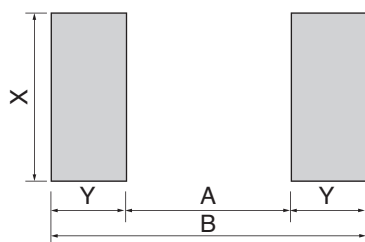


Size		Flow soldering				Reflow soldering			
Metric	Inch	A	B	X	Y	A	B	X	Y
0402	01005	Not applied				0.18	0.58	0.2	0.2
0603	0201					0.3	0.9	0.3	0.3
1005	0402					0.5	1.3	0.5	0.4
1608	0603	1.0	2.6	0.8	0.8	1.0	2.0	0.8	0.5
2012	0805	1.3	3.1	1.25	0.9	1.3	2.7	1.25	0.7
3216	1206	2.2	4.3	1.6	1.05	2.2	3.9	1.6	0.85
3225	1210	2.2	4.3	2.5	1.05	2.2	3.9	2.5	0.85
5025	2010	3.9	6.3	2.5	1.2	3.9	5.9	2.5	1.0
6332	2512	5.2	7.6	3.2	1.2	5.2	7.2	3.2	1.0

*For RLP, MLP please refer to the page 11.

*For RCC16 and RCC20, Please contact Kamaya sales department.

2. Chip network type (No. of terminal: Multiple)

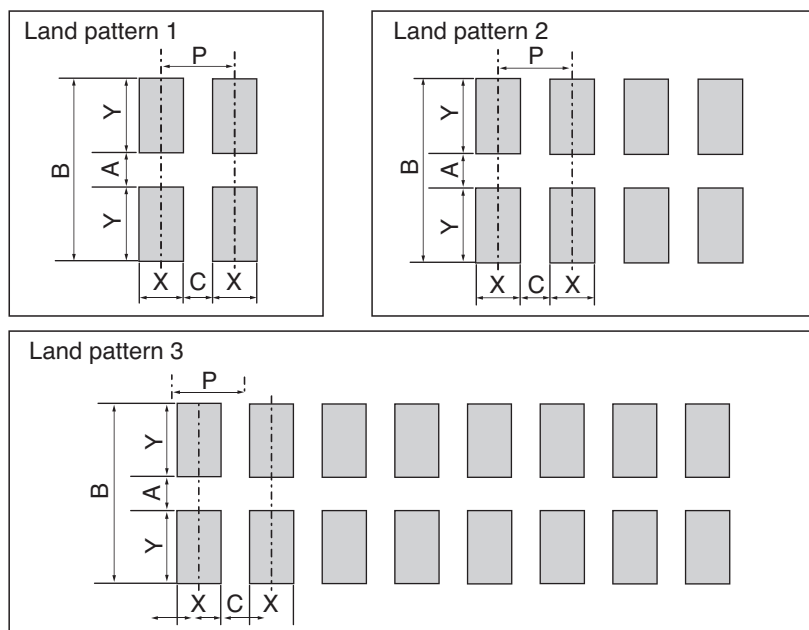

Land pattern	Style	Terminals style	P	Flow soldering					Reflow soldering				
				A	B	C	X	Y	A	B	C	X	Y
1	RAC10 2D	C	0.65	Not applied					0.5	1.3	0.34	0.33	0.4
	RAC10 1A								0.5	1.3	0.15	0.35	0.4
2	RAC10 4D	C	0.5	Not applied					0.5	1.3	0.15	0.35	0.4
2	RAC16 4D		0.8	1.0	2.6	0.35	0.45	0.8	1.0	2.0	0.35	0.45	0.5
3	RAC16 8D	C	0.5	Not applied					1.0	2.0	0.2	0.3	0.5

●Others

- (1) Please contact Kamaya Sales Dept. for other products and further details.
- (2) Please carry out an enough mounting evaluation when use these patterns.

SMD Product handling manual (RECOMMENDED SOLDERING CONDITION)

Note: This soldering condition is not supported by the mounting evaluation.

This is reference information only.

●Application


All KAMAYA Surface Mount Devices

●Recommended soldering condition (Reference)

1. Reflow soldering


1.1 Recommended condition of Sn-Pb solder.

Reflow times: 2 times

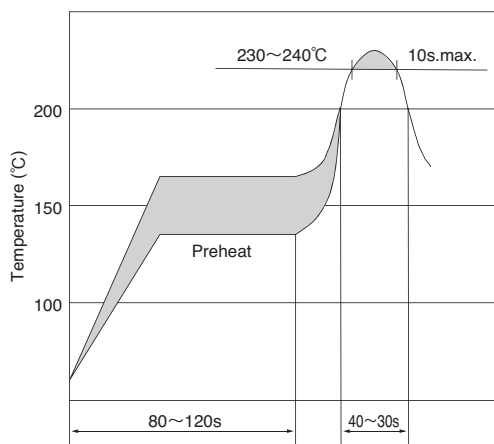


1.2 Recommended condition of Sn solder

Reflow times: 2 times

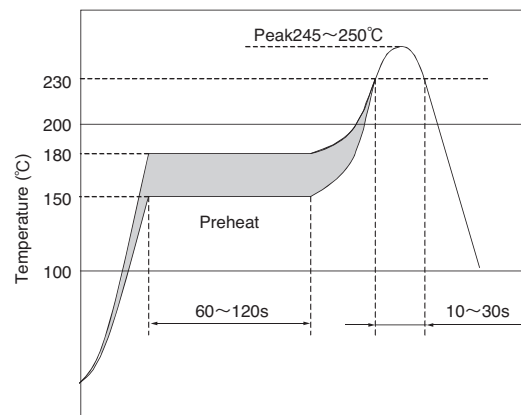

2. Flow soldering (Recommended condition of Sn solder and Sn-Pb solder)

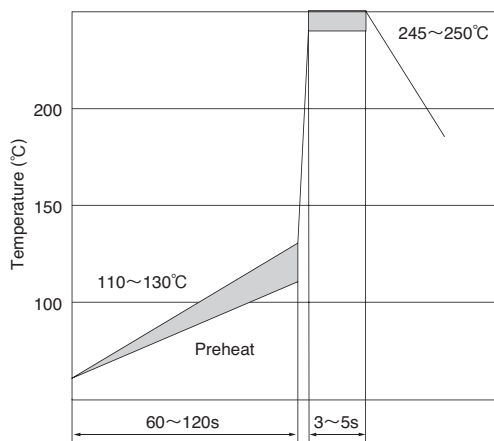

3. Soldering Iron (Recommended condition of Sn solder and Sn-Pb solder)

- (1) Temperature of soldering iron tip: 300°C, Duration: 10 s max.
- (2) Temperature of soldering iron tip: 350°C, Duration: 3 s max.

●Others

- (1) Please contact Kamaya Sales department for further information.
- (2) Please carry out an enough mounting evaluation when use this profile.

Term Explanation

●Resistors

Rated Dissipation

The maximum value of the electric power that can continuously be impressed to the resistor at the ambient temperature provided for within the category temperature range is indicated.

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the derating Curve.

Please note that the chip resistor networks provide for the rated dissipation of each element and each package when you use it.

Rated Voltage

The maximum value of the D.C or r.m.s. voltage that can continuously be impressed to the resistor at the ambient temperature provided for within the range of the category temperature range is indicated.

Rated Voltage = (Rated Dissipation) (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

However, Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Critical Resistance Value

Critical resistance value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Below critical resistance value, please use the rated voltage as the limiting element voltage.

Limiting Element Voltage

The maximum value of the d.c. or r.m.s. voltage that can continuously be impressed to the resistor and the resistive element is indicated.

Limiting Element Voltage that provides for the kind and each shape is different.

Isolation Voltage

The maximum value of the d.c. voltage that can be impressed for 1 minute the one that the electrode (terminal) was lumped together and between the insulation exterior or substrates is indicated.

When the voltage that exceeds the isolation voltage is impressed for the electrode and the insulation exterior (substrate), the insulation exterior might be destroyed by generation of heat and the direct current electrolysis action by the leakage current.

Voltage proof


The r.m.s voltage is impressed for 1 minute the one that the electrode (terminal) was lumped together and between the insulation exterior or substrates, and the insulation exterior indicates the maximum value of the voltage that breakdown or flashover.

Category Temperature Range

The ambient temperature of the resistor that can continuously be used adding a regulated rated load (electric power) is shown. It is not a temperature of air outside of an electronic equipment, and it is necessary to compare it with the ambient temperature in the electronic equipment in which the resistor is built in.

Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

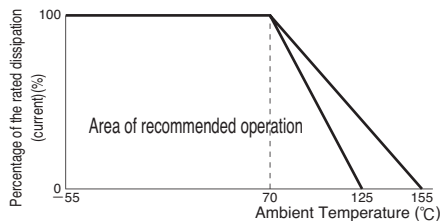

Variation of resistance with temperature (Temperature Coefficient of Resistance: TCR)

The change of resistance 1°C rate of the resistor within the range of the category temperature (category temperature range) is shown.

$$\text{Temperature Coefficient of Resistance: TCR } (\times 10^{-6}/^{\circ}\text{C}) = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^{-6}$$

R : Measured resistance at T°C

R₀ : Measured resistance at T°°C

T : Measured test temperature (°C)

T₀ : Measured base temperature (°C)

Especially, because the resistance temperature coefficient tends the large dependence of the measurement resistance on the measuring method, RLC/RLS/RCC/RLP&MLP needs noting.



Term Explanation

●Chip Fuses & Fusible Resistors

Joule Heat

It is the heat generated by the current.

The fuse melts inside by joule heat, and interrupts the current.

Fusible Characteristics

Relation between current (I) and fusion time (t) that flows to fuse.

It shows for the fusible Resistors by the relation between an impressed electric power (W) and the fusion time (W-t characteristic).

Rated Voltage

It shows maximum voltage value fuse can work properly.

It is the maximum voltage value in which the circuit can be safely interrupted after the fuse workings.

On selecting a fuse, it is necessary to confirm that the maximum rated voltage is less than rated voltage.

Interrupting Rating

It shows Maximum voltage(Rated voltage) and Maximum current for an interrupting circuit safely.

Maximum voltage and Maximum current should be applied below interrupting rating.

Working Temperature Range

It is temperature range fuse can works with specified condition,

Ambient temperature is to be within category temperature range.

Rated Current

A value of current which the fuse can be complied with, according to the test conditions.

It is different from the maximum current that applied to fuses, considering a long life span, the deratings are required.

Steady - State Current

It is current value at time that regularly flows to circuit regularly.

Deratings

1) Nominal Derating

It is derating value for rated current.

The reduction rate is depended on the type of fuse.

2) Temperature Derating

It is ambient temperature derating value for rated current.

The reduction rate is depended on the types of fuse and ambient temperature.

In-rush Current(Rush current)

Current that rapidly flows on circuit when power supply is turned on.

In many cases In-rush Current is bigger than Steady-state Current.

Chip fuses are confirmed to withstand In-rush Current.

Internal Resistance Value

An internal resistance values shown in this document include values in any materials of fuse, fuse element, outer terminations etc. Please refer to "section 10" for further information.

Additionally, resistance values are different depending on Temperature and Steady-state Current.

Maximum Open Circuit Voltage


Maximum open circuit voltage is the value of voltage applicable to both ends of resistors, when a resistor is open condition in a circuit.

This voltage shall be corresponding to 1,000 times the rated dissipation or maximum open circuit which is the less severe.

Product Marking

●Color coding


• Three - color band or four - color band system

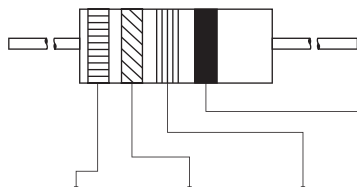

Color	1st color band 1st figure	2nd color band 2nd figure	3rd color band Multiplier	4th color band Resistance tolerance
Black	0	0	10^0	—
Brown	1	1	10^1	F($\pm 1\%$)
Red	2	2	10^2	G($\pm 2\%$)
Orange	3	3	10^3	—
Yellow	4	4	10^4	—
Green	5	5	10^5	—
Blue	6	6	10^6	—
Purple	7	7	10^7	—
Gray	8	8	10^8	—
White	9	9	10^9	—
Gold	—	—	10^{-1}	J($\pm 5\%$)
Silver	—	—	10^{-2}	K($\pm 10\%$)
Not colored	—	—	—	M($\pm 20\%$)


*For three-color band system the 4th color band is eliminated
(Resistance tolerance is $\pm 20\%$).

• Example

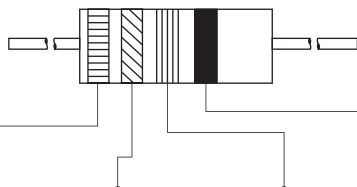

1st color band	2nd color band	3rd color band	4th color band
Brown	Red	Yellow	Gold
1	2	10^4	$\pm 5\%$
$12 \times 10,000 \text{ (ohm)} \pm 5\%$			
120k ohm J			


• Five - color band system

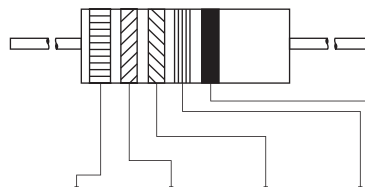

Color	1st color band 1st figure	2nd color band 2nd figure	3rd color band 3rd figure	4th color band Multiplier	5th color band Resistance tolerance
Black	0	0	0	10^0	—
Brown	1	1	1	10^1	F($\pm 1\%$)
Red	2	2	2	10^2	G($\pm 2\%$)
Orange	3	3	3	10^3	—
Yellow	4	4	4	10^4	—
Green	5	5	5	10^5	D($\pm 0.5\%$)
Blue	6	6	6	10^6	C($\pm 0.25\%$)
Purple	7	7	7	10^7	B($\pm 0.1\%$)
Gray	8	8	8	10^8	—
White	9	9	9	10^9	—
Gold	—	—	—	10^{-1}	—
Silver	—	—	—	10^{-2}	—

*RC1/2U : Please refer to page 24.

• Example

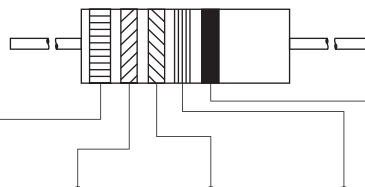

1st color band	2nd color band	3rd color band	4th color band	5th color band
Purple	Blue	Gray	Gold	Brown
7	6	8	10^{-1}	$\pm 1\%$
$768 \times 0.1 \text{ (ohm)} \pm 1\%$				
76.8 ohm F				

●Rated resistance symbols

The symbols to indicate rated resistance are depicted in 3 characters (for the E6, E12, and E24 series) or 4 characters (for the E48, E96 and E192 series) as indicated below.

In the case of 3 characters, the first and second character represent the effective numeral, and the third character is the multiplier following the effective numeral.

In the case of 4 characters, the first, second and third character represent the effective numeral, and the fourth character is the multiplier following the effective numeral.

When a decimal point exists, the decimal point is represented by an R for all effective numerals.

• 3-Digit (example)

Rated resistance symbols	Resistance value
R15	0.15 ohm
1R5	1.5 ohm
150	15 ohm
151	150 ohm
152	1.5k ohm
153	15k ohm
154	150k ohm
155	1.5M ohm
156	15M ohm
157	150M ohm

• 4-Digit (example)

Rated resistance symbols	Resistance value
R154	0.154 ohm
1R54	1.54 ohm
15R4	15.4 ohm
1540	154 ohm
1541	1.54k ohm
1542	15.4k ohm
1543	154k ohm
1544	1.54M ohm
1545	15.4M ohm
1546	154M ohm

• Resistance values of 100M ohm and greater(example)

Rated resistance symbols	Resistance value
100M	100M ohm
1G00	1G ohm
10G0	10G ohm
100G	100G ohm

*The letters M and G are used as multipliers for 10^6 and 10^9 respectively of the resistance value expressed in ohms.

Standard Resistance Values and Symbols

●Code Tolerances

Code	Tolerance on rated resistance
H	±50%
N	±30%
M	±20%
K	±10%
J	±5%
G	±2%
F	±1%
D	±0.5%
C	±0.25%
B	±0.1%

●Temperature Characteristics Symbol Table

Code	Temperature coefficient of resistance
E	±25 × 10 ⁻⁶ /°C
C	±50 × 10 ⁻⁶ /°C
K	±100 × 10 ⁻⁶ /°C
D	±200 × 10 ⁻⁶ /°C
A	±500 × 10 ⁻⁶ /°C
M	±1,000 × 10 ⁻⁶ /°C
N	±70 × 10 ⁻⁶ /°C

●Significant Figure of Resistance Value

E6	E12	E24	E48	E96	E192	E6	E12	E24	E48	E96	E192	E6	E12	E24	E48	E96	E192
10	10	10	100	100	100 101 102 104 105 106 107 109 110 111 113 114 115 117 118 120 121 123 124 126 127 129 130 132 133 135 137 138 140 142 143 145 147 149 150 152 154 156 158 160 162 164 165 167 169 172 174 176 178 180 182 184 187 189 191 193 196 198 200 203 205 208 210 213	100	102 105 107 110 113 115 118 121 124 127 130 133 137 140 143 147 150 154 158 162 165 169 174 178 182 187 191 196 200 205 210	22	22	22	215 221 223 226 229 232 234 237 240 243 246 249 252 255 258 261 264 267 271 274 277 280 284 287 291 294 298 301 305 309 312 316 320 324 328 332 336 340 344 348 352 357 361 365 370 374 379 383 388 392 397 402 412 417 422 427 432 437 442 448 453	215 218 221 223 226 229 232 234 237 240 243 246 249 252 255 258 261 264 267 271 274 277 280 284 287 291 294 298 301 305 309 312 316 320 324 328 332 336 340 344 348 352 357 361 365 370 374 379 383 388 392 397 402 412 417 422 427 432 437 442 448 453	47	47	47	464 470 475 481 487 493 499 505 511 517 523 530 536 542 549 556 562 569 576 583 590 597 604 612 619 626 634 642 649 657 665 673 681 690 698 706 715 723 732 741 750 759 768 777 787 796 806 816 825 835 845 856 866 876 887 898 909 920 931 942 953 965 976 988	464 470 475 481 487 493 499 505 511 517 523 530 536 542 549 556 562 569 576 583 590 597 604 612 619 626 634 642 649 657 665 673 681 690 698 706 715 723 732 741 750 759 768 777 787 796 806 816 825 835 845 856 866 876 887 898 909 920 931 942 953 965 976 988

*Please refer to each page for standard values of each parts.

Numerical Symbols and Multipliers

Code	T(tera)	G(giga)	M(mega)	k(kilo)	m(milli)	μ (micron)	n(nano)	p(pico)
Multiplier	10 ¹²	10 ⁹	10 ⁶	10 ³	10 ⁻³	10 ⁻⁶	10 ⁻⁹	10 ⁻¹²

Formula of Ohm's Law


Direct Current	Power(P)			Voltage(E)			Current(I)			Resistance(R)		
Calculating Formula	EI	I ² R	$\frac{E^2}{R}$	IR	\sqrt{PR}	$\frac{P}{I}$	$\frac{E}{R}$	$\sqrt{\frac{P}{R}}$	$\frac{P}{E}$	$\frac{E}{I}$	$\frac{E^2}{P}$	$\frac{P}{I^2}$

Kamaya Shipping Label

Kamaya products are put a shipping label on reel or other packaging.
Refer to the sample of the shipping label as follows.

●Example for chip resistors

RMC1/16K 272F TP 1608size, Fixed Thick Film Chip Resistor, 2.7k ohm F($\pm 1\%$)

(1)	RMC1/16 K 272F TP 01	(7)
(2)	P/N XXXX	
(6)	2.7 KQF(52-50H) 5000PCS	(3)
		
(4)	L/N 071412282H (70815)	
(5)	KAMAYA OHM	

(1)Product type(Style, Temperature coefficient of resistance, Rated resistance, Tolerance, Packaging)

(2)Parts number from customer (P/N)

(3)Quantity

(4)Shipping Lot Number (L/N)

(5)Manufacturer


(6)Internal code 1

(7)Internal code 2


*There are cases in which (2) and (7) are not shown on Kamaya shipping label.

*Please contact Kamaya sales department, if you need to confirm this label specification.

Kamaya Global Network

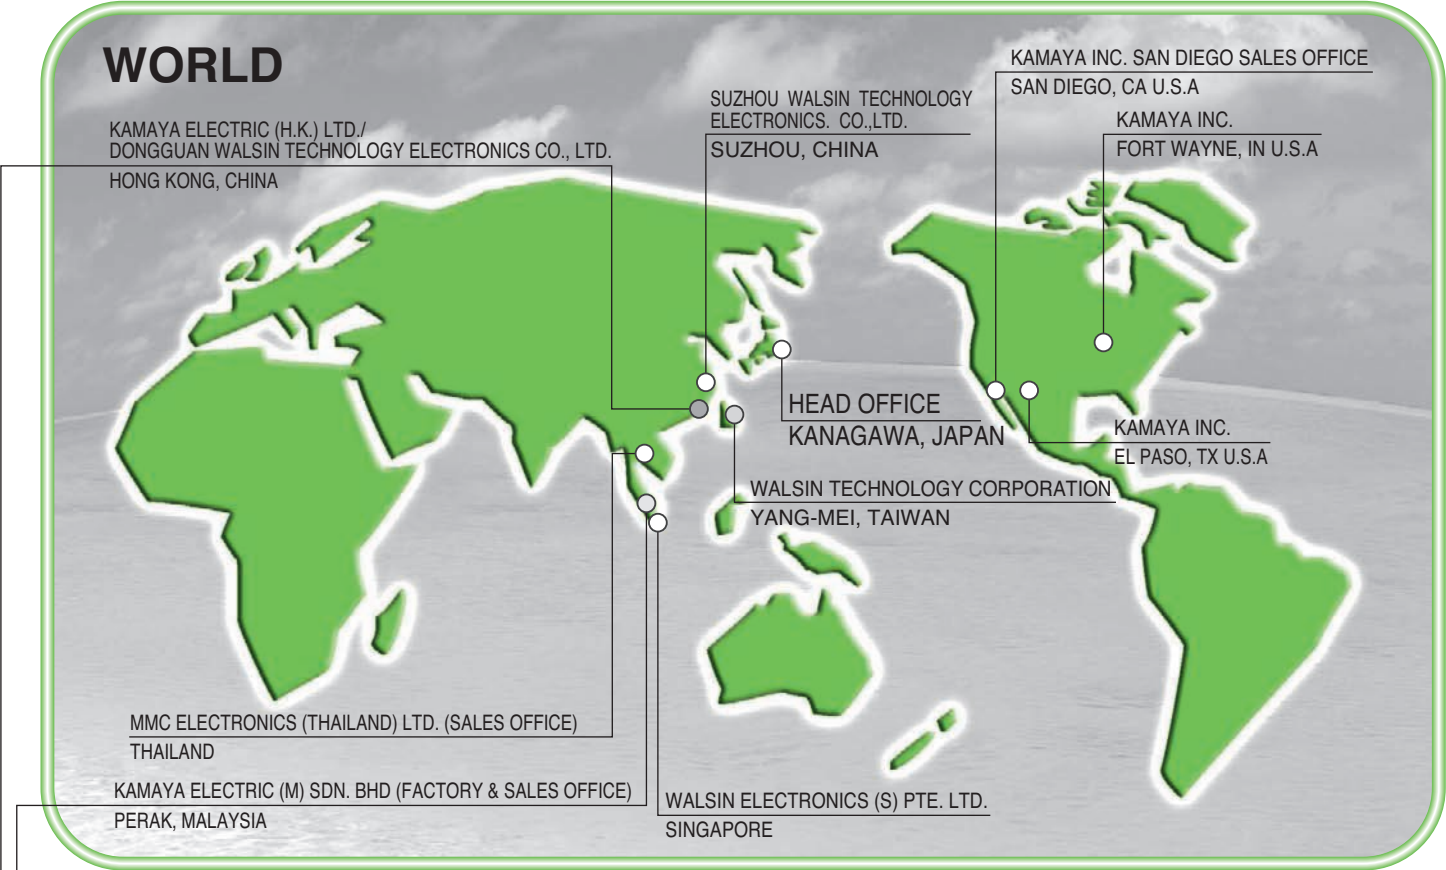

Application Facilities		Standard	Certification Organization	Certification No.	Certificate Date
JAPAN	NAIE Factory	ISO9001	Bureau Veritas JapanCo.,Ltd	2785613	Jul.28,1995
		ISO/TS16949		IATF 136837	Mar.22,2012
		ISO14001		2989282	May.9,2002
MALAYSIA	KAMAYA ELECTRIC(M)SDN, BHD.	ISO9001	NQA Global Assurance	22815	Aug.10,2007
		ISO/TS16949		IATF 0106025	Jul.26,2007
		ISO14001		E3242	Jul.11,2007
China (WALSIN Product)	DONGGUAN WALSIN TECHNOLOGY ELECTRONICS CO., LTD.	ISO9001	UL DQS Inc	20003508 QM08	May.21,1996
		ISO/TS16949		IATF 0117277	Mar.25,2005
		ISO14001	CTI International Certification	04112E20082R3L	Aug.13,2003
		OHSAS 18001	EICS	04111S18001R1L	Aug.14,2008

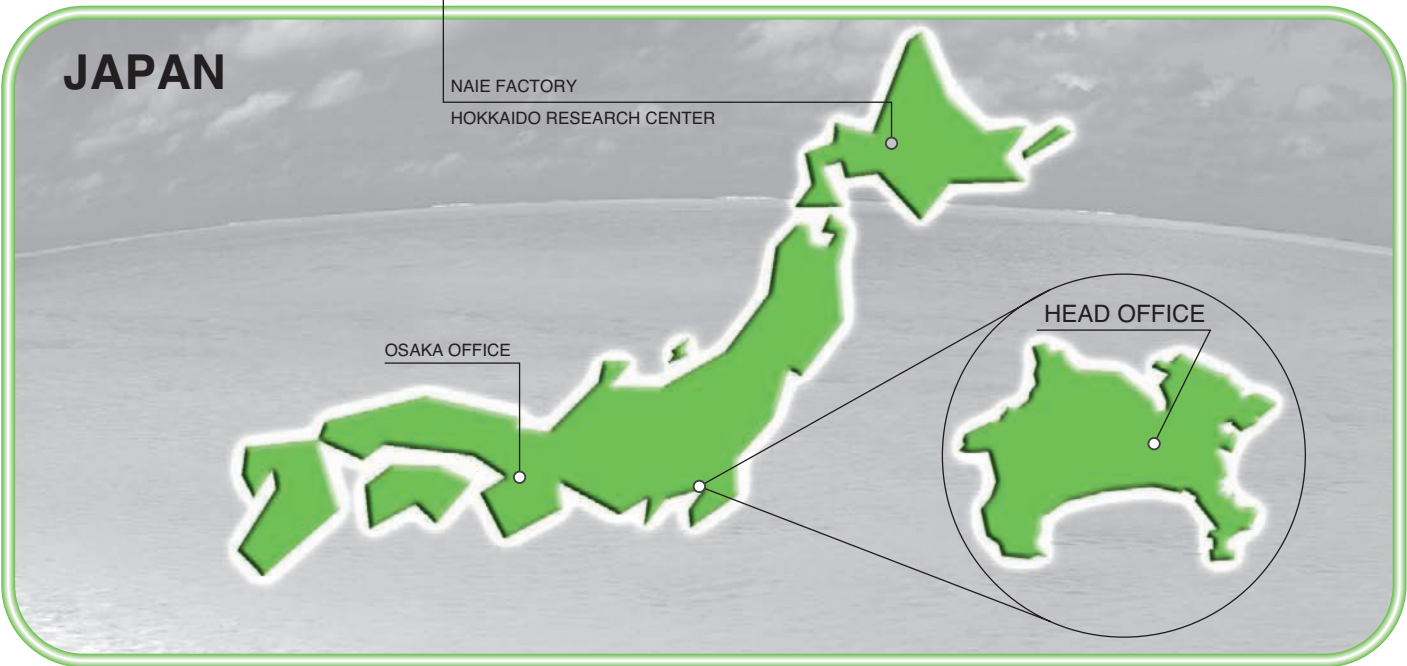



釜屋電機株式會社
KAMAYA ELECTRIC CO., LTD.
<http://www.kamaya.co.jp>

HEAD OFFICE

8-4-17 Fukayanaka, Ayase-shi, Kanagawa, 252-1107 Japan
Tel : (+81) 467-71-0886 / Fax : (+81) 467-71-0910

E-mail : sales@kamaya.co.jp

Osaka Office 6th floor, Sin Nakajima Building, 1-9-20 Nishi Nakajima, Yodogawa-ku, Osaka-shi, Osaka, 532-0011
TEL : (+81) 6-6304-5761 FAX : (+81) 6-6306-0131

Naie Factory, Hokkaido 955-1 Naie, Aza, Naie-cho, Sorachi-gun, Hokkaido, 079-0397
Hokkaido Research Center TEL : (+81) 125-65-2171 FAX : (+81) 125-65-2177

U.S.A **KAMAYA INC. (SALES OFFICE AND WAREHOUSE)**
URL <http://www.kamaya.com/>
6407 Cross Creek Blvd. Fort Wayne, IN 46818 U.S.A.
Tel : (+1) 260-489-1533 / Fax : (+1) 260-489-2261 / E-mail : sales@kamaya.com

KAMAYA INC. (SAN DIEGO SALES OFFICE)
4163 Cleveland Ave #1 San Diego, CA 92103 U.S.A.
Tel : (+1) 858-775-6050 / Fax : (+1) 619-284-8749

KAMAYA INC. (EL PASO WAREHOUSE)
28-A Concord Street, El Paso, TX 79906 U.S.A.
Tel : (+1) 915-779-7253 / Fax : (+1) 915-779-7180 / E-mail : sales@kamaya.com

TAIWAN **WALSIN TECHNOLOGY CORPORATION**
566-1, Kao-shi Road Yang-mei, Taoyuan, 326, Taiwan, R.O.C.
Tel : (+886) 3-4758711 / Fax : (+886) 3-4756747

MALAYSIA **KAMAYA ELECTRIC (M) SDN. BHD. (1ST FACTORY AND SALES OFFICE)**
No. 2, Jalan Klebang 1/5 Zone, Perindustrian Bebas, Kinta Jalan Kuala Kangsar,
31200 Chemor, Perak, Malaysia.
Tel : (+60) 5-291-5522 / Fax : (+60) 5-291-2600 / E-mail : Kmy@kamaya.com.my

KAMAYA ELECTRIC (M) SDN. BHD. (2ND FACTORY)
No. 17, Jalan Klebang 1/6 Zone, Perindustrian Bebas, Kinta Jalan Kuala Kangsar,
31200 Chemor, Perak, Malaysia.

HONG KONG **KAMAYA ELECTRIC (H.K.) LTD.**
NO.638, Mei Jing West Road (523799) Xiniupo Administrative Zone
Dalang Town, Dong-Guan City, Guang Dong Province, China.
Tel : (+86) 769-8106-9331 / Fax : (+86) 769-8895-3204

CHINA **SUZHOU WALSIN TECHNOLOGY ELECTRONICS. CO.,LTD.**
NO.369 Changyang Street, Suzhou Industrial Park, Jiangsu P.R. 215024 China.
Tel : (+86) 512-6283-6888 / Fax : (+86) 512-6283-0886 / E-mail : [kamayasales@kamaya.co.jp](mailto:kamayasaless@kamaya.co.jp)

SINGAPORE **WALSIN ELECTRONICS (S) PTE. LTD.**
8 Ubi View #04-01, Serial System Building, Singapore 408554.
Tel : (+65) 6896-3868 / Fax : (+65) 6861-3381

THAILAND **MMC ELECTRONICS (THAILAND) LTD.**
129/2 Moo17 Bangplee Industrial Estate, Bangsaonthong,
Bangsaonthong Sub-District Samutprakarn 10540 Thailand
Tel : (+66) 2-705-1346 / Fax : (+66) 2-315-1565 / E-mail : mmethsa@mmeth.co.th

Important

Product specifications contained in this catalogue are subject to change at any time without notice. Please confirm specifications with your order.