

KAMAYA

Electronic Components

Catalog **2017**

KAMAYA



Product line up (2016,12)

Products Category			Product Type	Page	Chip Size									
					0402	0603	1005	1608	2012	3216	3225	5025	6126	6332
Chip Resistors	General purpose		RMC	7	●	●	●	●	●	●	●	●		●
		Precision	RGC	8	●	●	●	●	●	●				
		High Precision	RNC	9		●			●	●				
		Pb Free	NEW RMPC	10	NEW	NEW	NEW	NEW	NEW	NEW	NEW			
		High Power	NEW RMCH	11				NEW	NEW	NEW	NEW	★		★
		Wide Terminal	NEW TWMC	12						NEW		NEW		NEW
	Anti Sulfuration	Barrier type	RMNW	13			●	●	●	●	●	●		●
		Special electrode type	RAW	14		●	●	●	●	●				
		Barrier / Special electrode	NEW RMGW	15			NEW	NEW	NEW	NEW	NEW	NEW		NEW
			★ RMSW	16			★	★	★	★	★	★		★
	Trimable chip		FCR	17				●	●	●	●	●		●
	High ohmic		RHC	18				●	●					
	High Voltage		RVC	19				●	●	●		●		●
		Special High Voltage type	RZC	20								●		●
		Anti-Sulfuration	NEW RVAC	21						NEW				
	Anti Surge		RPC	22				NEW	●	●	●	●		●
		High Power	NEW RPCH	23				NEW	NEW	NEW	NEW			
		High Power type	RBX	24				●	NEW	NEW	NEW	★		★
		High Power / Anti-Sulfuration	NEW RPGW	25				NEW	NEW	NEW	NEW			
	Current sensing	General purpose type	RLC	26			●	●	●	●	●	●		●
		Face Down type	RCC	28		●	●	●	●	●				
		Wide Terminal General type	TWLC	29						NEW		●		NEW
		Metal plate type	RLP	30			●	●	●	●				●
			MLP	32				●	●	NEW				●
			NEW MLP63C	34										NEW
			WLP63	35										●
		Wide Terminal Metal plate	★ TWP	36										★
		Metal Foil type	NEW DLP	37					NEW	NEW				
			RAC	38						●				
	Networks	Anti Sulfuration	NEW RAAW	39						NEW				
	Linear Positive T-C Chip Thermistors		LTC	40				●	●	●				
	Fusible Resistors		FRC	41				●	●	●				

Products Category			Product Type	Page	Chip Size									
					0402	0603	1005	1608	2012	3216	3225	5025	6126	6332
Chip Fuse	General Purpose		FCC / FHC	42			●	●	●	●				
	In-rush Withstand / Low ohm Fast Acting		FMC	44			●	●						
	General Purpose Low ohm		FCCR	46			●	●						
	Slow Blow		SBF	47						●				
	High Rated Voltage		HFC	48						●				
	Ceramics Case (Primary side)		PFC	49									NEW	

Products Category			Product Type	Page	Chip Size									
					0402	0603	1005	1608	2012	3216	3225	5025	6126	6332
Chip Attenuators			RAC101A	50										

Products Category			Product Type	Page	Chip Size									
					0402	0603	1005	1608	2012	3216	3225	5025	6126	6332
ESD Suppressors			SPC	51		NEW	●							
			HSPC	51			●	●						

Products Category			Product Type	Page	Rated Dissipation at 70℃ (W)									
					0.25W					0.5W				
Lead Resistors	Carbon Composition	UL authorized type	RC1/2U	54							●			
			RC	55			●				●			

Products Category		Page	Size		
			Chip Type	Lead Type	
Capacitors	Multilayer Ceramic Capacitor	56	01R5 to 2225inch		
	Film Capacitors	59	—	●	

★ : Under Development

Information

Page

AEC-Q200 Rev.D Qualification	2
Application for Automotive	3
Anti Sulfuration's approach	4
Low Resistance Chip Resistor for Sensing Selection Guide	5

Information

Page

Chip Fuse Selection Guide	6
Packaging for Surface Mount Devices	52
Packaging for Leaded Resistors	55

	11050	0806	1010	1406	2010	3816	Tolerance on Rated Resistance (%)	Rated Resistance Range	Situation for environment				Product Type	Page
									RoHS	Pb free ^{*1}	Halogen free ^{*2}	Antimony free ^{*3}		
							±0.1, ±0.5, ±1, ±2, ±5	1Ω ~ 24MΩ	●		●	●	RMC	7
							±0.1, ±0.5, ±1	3.3Ω ~ 4.7MΩ	●		●	●	RGC	8
							±0.1, ±0.25, ±0.5	10Ω ~ 180kΩ	●	●	●	●	RNC	9
							±1, ±5	1Ω ~ 10MΩ	●	●	●	●	NEW RMPC	10
							±0.5, ±1, ±5	1Ω ~ 1MΩ	●		●	●	NEW RMCH	11
							±1, ±5	1Ω ~ 1MΩ	●		●	●	NEW TWMC	12
							±0.5, ±1, ±5	1Ω ~ 10MΩ	●		●	●	RMNW	13
							±0.5, ±1, ±5	1Ω ~ 10MΩ	●		●	●	RMAW	14
							±1, ±5	1Ω ~ 10MΩ	●		●	●	NEW RMGW	15
							±0.5, ±1, ±5	1Ω ~ 10MΩ	●		●	●	★ RMSW	16
							0 -30, ±15	1Ω ~ 4.7MΩ	●		●	●	FCR	17
							±5, ±10, ±20, ±30, ±50	100MΩ ~ 150GΩ	●		●	●	RHC	18
							±0.5, ±1, ±2, ±5, ±10	47Ω ~ 51MΩ	●		●	●	RVC	19
							±5, ±10, ±20	1MΩ ~ 16MΩ	●		●	●	RZC	20
							±0.5, ±1, ±5	47Ω ~ 51MΩ	●		●	●	NEW RVAC	21
							±5, ±10, ±20	0.27Ω ~ 27MΩ	●		●	●	RPC	22
							±0.5, ±1, ±5	1Ω ~ 1MΩ	●		●	●	NEW RPCH	23
							±0.5, ±1, ±5	1Ω ~ 1MΩ	●		●	●	RBX	24
							±0.5, ±1, ±5	1Ω ~ 1MΩ	●		●	●	NEW RPGW	25
							±1, ±2, ±5	10mΩ ~ 10Ω	●		●	●	RLC	26
							±1, ±5	10mΩ ~ 100mΩ	●	●	●	●	RCC	28
							±1, ±5	100mΩ ~ 910mΩ	●		●	●	TWLC	29
							±1, ±5	1mΩ ~ 15mΩ	●	●	●	●	RLP	30
							±1, ±5	0.5mΩ ~ 10mΩ	●	●	●	●	MLP	32
							±1, ±5	0.5mΩ ~ 10mΩ	●	●	●	●	NEW MLP63C	34
							±1, ±2, ±5	15mΩ, 20mΩ, 25mΩ	●	●	●	●	WLP63	35
	★						±1, ±5	5mΩ	●		●	●	★ TWP	36
							±1, ±5	15mΩ ~ 50mΩ	●	●	●	●	NEW DLP	37
		●	●	●	●	●	±1, ±5	1Ω ~ 10MΩ	●		●	●	RAC	38
		NEW	NEW	NEW	★	★	±1, ±5	10Ω ~ 1MΩ	●		●	●	NEW RAAW	39
							±5	33Ω ~ 10kΩ	●	●	●	●	LTC	40
							±5	1Ω ~ 100Ω	●		●	●	FRC	41

	11050	0806	1010	1406	2010	3816	Rated Current	Fusing Characteristics	Situation for environment				Product Type	Page
									RoHS	Pb free ^{*1}	Halogen free ^{*2}	Antimony free ^{*3}		
							0.15A ~ 5.0A	Fast-Acting type	●	●	●	●	FCC / FHC	42
							0.5A ~ 5.0A	Fast-Acting type	●	●	●	●	FMC	44
							0.15A ~ 2.5A	Fast-Acting type	●	●	●	●	FCCR	46
							1.0A ~ 8.0A	Slow Blow type	●	●	●	●	SBF	47
							1.0A ~ 12.5A	Fast-Acting type	●	●	●	●	HFC	48
							0.315A ~ 15A	Fast-Acting type	●	●	●	●	★ PFC	49

	11050	0806	1010	1406	2010	3816	Attenuation Factor	Tolerance on Attenuation Factor	Situation for environment				Product Type	Page
									RoHS	Pb free ^{*1}	Halogen free ^{*2}	Antimony free ^{*3}		
			●				1dB ~ 10dB	±0.3dB, ±0.4dB	●		●	●	RAC101A	50

	11050	0806	1010	1406	2010	3816	Capacitance		Test Voltage		Situation for environment				Product Type	Page
							0.1pF	0.2pF	8kV	15kV	RoHS	Pb free ^{*1}	Halogen free ^{*2}	Antimony free ^{*3}		
							●		●		●	●	●	●	SPC	51
							●	●		●	●	●	●	●	HSPC	51

		Tolerance on Rated Resistance (%)	Rated Resistance Range	Situation for environment				Product Type	Page
				RoHS	Pb free ^{*1}	Halogen free ^{*2}	Antimony free ^{*3}		
		±10, ±20	1MΩ ~ 10MΩ	●	●		●	RC1/2U	54
		±5, ±10, ±20	1Ω ~ 22MΩ	●	●		●	RC	55

Capacitance	Dielectric	Rated Voltage			Products	Product Type	Page
0.1pF to 220pF	NP0, X7R, Y5V, X5R	6.3V, 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1kV, 1.5V, 2kV, 3kV			Walsin	Capacitors	56
0.001μF ~ 22μF	—	—			Nitsuko		58

※1 Pb free : pb≤1000ppm ※2 Halogen free : Cl or Br≤900ppm, Cl+Br≤1500ppm ※3 Antimony free : Sb2O3≤900ppm

Information

Page

Handling Manual

- SMD Products 60
- Recommended Land Pattern 62
- Recommended Soldering Condition 63

Information

Page

- Term Explanation 64
- Product Marking 66
- Standard Resistance Values and Symbols 67
- Kamaya Shipping Label 68

AEC-Q200 Rev.D Qualification

- AEC stands for "Automotive Electronics Council". It is the group consisting of the major automotive makers and major electronic parts maker in the USA. These are divided by the parts categories, and our company is categorized in AEC-Q200. AEC-Qxxx is widely accepted as the electronic parts standards for the automotive products and this is the actual industry standard in the market.
- The following indicates the parts evaluated by AEC-Q200 testing. They are AEC-Q200 qualified. For more details, specification, evaluation test result etc, please contact Kamaya Sales dept.

※1 "Qualified. Based on the evaluation test result of Kamaya, please consider to use "

※2 "Non-qualified. Kamaya developed same spec products of AECQ200 qualified."

"Please contact Kamaya sales window for the details of spec and evaluation test result"

Category	Product Type	Size (Metric)	Page	AEC-Q200
General-purpose	RMC1/32	0402	7	Non-qualified
	RMC1/20	0603	7	Qualified ※ 1
	RMC1/16S	1005	7	
	RMC1/16	1608	7	
	RMC1/10	2012	7	Qualified
	RMC1/8	3216	7	
	RMC1/4	3225	7	
	RMC1/2	5025	7	
Precision	RMC1	6332	7	
	RGC1/32	0402	8	Non-qualified
	RGC1/20	0603	8	Qualified ※ 1
	RGC1/16S	1005	8	
	RGC1/16	1608	8	Qualified
High Precision	RGC1/10	2012	8	
	RGC1/8	3216	8	
	RNC06	0603	9	Non-qualified
	RNC20	2012	9	
Pb Free	RNC32	3216	9	
	RMPC04	0402	10	Non-qualified
	RMPC06	0603	10	
	RMPC10	1005	10	
	RMPC16	1608	10	
High Power	RMPC20	2012	10	
	RMPC32	3216	10	Qualified ※ 1
	RMPC35	3225	10	
	RMCH16	1608	11	
Wide Terminal	RMCH20	2012	11	Qualified
	RMCH32	3216	11	
	RMCH35	3225	11	
	RMCH50	5025	11	
	RMCH63	6332	11	
Anti-Sulfuration	TWMC32	1632	12	Qualified ※ 1
	TWMC50	2550	12	
	TWMC63	3263	12	Qualified
	RMNW10	1005	13	
	RMNW16	1608	13	
	RMNW20	2012	13	
	RMNW32	3216	13	Qualified
	RMNW50	5025	13	
	RMNW63	6332	13	Qualified ※ 1
	RMAW06	0603	14	
	RMAW10	1005	14	
	RMAW16	1608	14	Qualified
	RMAW20	2012	14	
	RMAW32	3216	14	Qualified ※ 1
	RMGW10	1005	15	
	RMGW16	1608	15	Qualified
	RMGW20	2012	15	
	RMGW32	3216	15	
	RMGW35	3225	15	Qualified ※ 1
	RMGW50	5025	15	
Trimable	RMGW63	6332	15	Qualified
	RMGW70	7025	15	
	RMSW10	1005	16	Qualified ※ 1
	RMSW16	1608	16	
	RMSW20	2012	16	Qualified
	RMSW32	3216	16	
	RMSW35	3225	16	
High Resistance	RMSW50	5025	16	Qualified
	RMSW63	6332	16	
	FCR1/16	1608	17	Non-qualified
	FCR1/10	2012	17	
	FCR1/8	3216	17	
	FCR1/4	3225	17	
	FCR1/2	5025	17	
High-voltage	FCR1	6332	17	Qualified ※ 1
	RHC16	1608	18	
	RHC20	2012	18	Qualified
	RVC16	1608	19	
	RVC20	2012	19	
	RVC32	3216	19	
	RVC50	5025	19	
	RVC63	6332	19	Qualified
	RZC50	5025	20	
	RZC63	6332	20	
	RVAC32	3216	21	

Category	Product Type	Size (Metric)	Page	AEC-Q200
Surge	RPC16	1608	22	Qualified ※ 1
	RPC20	2012	22	Qualified
	RPC32	3216	22	
	RPC35	3225	22	
	RPC50	5025	22	Qualified ※ 1
	RPC63	6332	22	
	RPCH16	1608	23	Qualified
	RPCH20	2012	23	
	RPCH32	3216	23	Qualified ※ 1
	RPCH35	3225	23	
	RBX16	1608	24	Qualified
	RBX20	2012	24	
	RBX32	3216	24	
	RBX35	3225	24	Qualified ※ 1
	RBX50	5025	24	
Low Resistance	RBX63	6332	24	Qualified
	RPGW16	1608	25	
	RPGW20	2012	25	Qualified ※ 1
	RPGW32	3216	25	
	RPGW35	3225	25	Qualified
	RLC10	0402	26	
	RLC16	0603	26	Qualified
	RLC20	2012	26	
	RLC32	3216	26	
	RLC35	3225	26	Qualified ※ 1
	RLC50	5025	26	
	RLC63	6332	26	Qualified
	RCC06	0603	28	
	RCC10	1005	28	Qualified
	RCC16	1608	28	
Chip Network	RCC20	2012	28	Qualified
	RCC32	3216	28	
	TWLC32	1632	29	Qualified ※ 1
	TWLC50	2550	29	
	TWLC63	3263	29	Qualified
	RLP16	1608	30	
	RLP20	2012	30	Qualified
	RLP32	3216	30	
	RLP63	6332	30	Qualified
	MLP20	2012	32	
	MLP32	3216	32	Qualified
	MLP63	6332	32	
	MLP63C	6332	34	Qualified
	WLP63	6332	35	
Chip Fuse	TWP63	3263	36	Qualified
	TWP110	50110	36	
	DLP20	2012	37	Qualified
	DLP32	3216	37	
	RAC062D	0603 2-Elements	38	Non-qualified
	RAC064D	0603 4-Elements	38	
	RAC102D	1005 2-Elements	38	Non-qualified ※ 2
	RAC104D	1005 4-Elements	38	
	RAC164D	1608 4-Elements	38	Non-qualified
	RAC168D	1608 8-Elements	38	
	RAAW062DE	0603 2-Elements	39	Qualified
	RAAW064DE	0603 4-Elements	39	
	RAAW102D	1005 2-Elements	39	Qualified ※ 1
	RAAW104D	1005 4-Elements	39	
	RAAW164D	1608 4-Elements	39	Non-qualified
High Frequency	LTC1/10	2012	40	
	LTC1/8	3216	40	Non-qualified
	FRC16	1608	41	
	FRC20	2012	41	Qualified
	FRC32	3216	41	
	FCC10 • FHC10	1005	42	Qualified ※ 1
	FCC16 • FHC16	1608	42	
	FCC20 • FHC20	2012	42	Qualified
	FCC32 • FHC32	3216	42	
	FMC10	1005	44	Qualified
	FMC16	1608	44	
	FCCR10	1005	46	Qualified
	FCCR16	1608	46	
	SBF32	3216	47	Qualified
	HFC32	3216	48	
ESD Suppressors	PFC60	6126	49	Non-qualified
	RAC101A	1005 2-Elements	50	
	SPC06	0603	51	Qualified
	SPC10	1005	51	
	HSPC10	1005	51	Qualified ※ 1
	HSPC16	1608	51	

Application for Automotive

●Application


Powertrain

- Ignition coil
- HV/EV Inverter
- Electric motor

Anti sulfuration



Low Ohm



High Voltage



High Power




Chassis Control

- Electric Power Steering (EPS)
- Electric Parking Brake (EPB)

Anti sulfuration



Low Ohm



High Voltage



High Power




Body Control

- Smart Key/Immobilizer
- Retractable Power Door Mirror
- HID & LED Head Light
- Power Window
- Meter
- Power seat
- Air conditioner

Anti sulfuration



Low Ohm



Chip Fuse




High Voltage



High Power



ESD Suppressor




Battery management

- Battery Charger
- Charging stations
- Battery management system

Anti sulfuration



Low Ohm



Chip Fuse



High Voltage




High Power



ADAS

- Millimeter Wave Rader/Infrared Lidar
- Ultrasonic sensor/Motion sensor
- Camera/Night vision device
- Adaptive Cruise Control (ACC)


Miniature size



Anti sulfuration



Low Ohm



High Power




Safety

- Airbags
- Electronic Stability Control (ESC)
- Anti-lockbrake System (ABS)
- Tire Pressure Monitoring System (TPMS)

Anti sulfuration



Low Ohm



High Voltage




High Power



Infotainment

- Car navigation system
- Rear View Camera Monitor
- Electronic Toll Collection System

Low Ohm



High Power



Chip Fuse



ESD Suppressor





Anti-Sulfuration Chip Resistor development

Anti-sulfuration chip resistor is a resistor that prevents sulfided disconnection while used under severe environment such as for automotive or industrial equipment.

KAMAYA is working on anti-sulfuration for various resistors, making it possible to select suitable product for the environment used or for the required resistance.


Anti-Sulfuration performance

* Level 0, 1, 2 is Kamaya criteria



NEW

Low Resistance Chip Resistor for Sensing Selection Guide

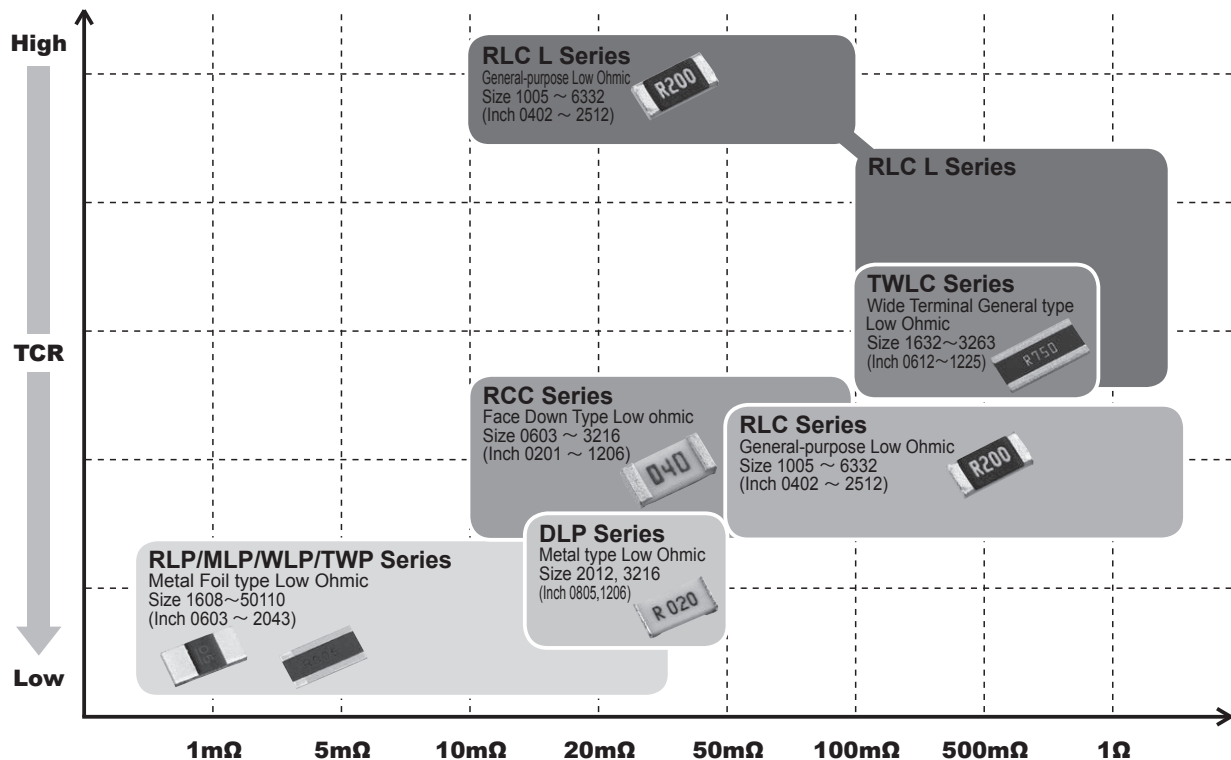

Type	RCC	RCC	RLC	RLCL	RCC	RLC	RLCL	RLP	RCC	RLC	RLCL	RLP	MLP	DLP	RCC	RLC	RLCL	RLP	MLP	DLP	TWLC	RLC	RLCL	RLC	RLCL	TWLC	RLC	RLCL	RLP	MLP	WLP	MLP30C	TWLC	TWP	TWP
Size Metric (Inch)	0603 (0201)		1005 (0402)			1608 (0603)					2012 (0805)						3216 (1206)				1632 (0612)	3225 (1210)	5025 (2010)	2550 (1020)			6332 (2512)					3263 (1225)	50110 (2043)		
6W																																			
3W																																			
2W																																			
1.5W																																			
1W																																			
0.75W																																			
0.66W																																			
0.5W																																			
0.33W																																			
0.25W																																			
0.125W																																			
0.1W																																			
0.063W																																			

[Note] For the details of low-ohm chip resistor, please refer to page26 to 37.


















●Precaution for the current sensing chip resistor


1. Resistance value changed by the soldering conditions. Please confirm the resistance value change for designing.
2. RCC series has resistive element on the bottom side.
Please be careful for visual inspection, to check missing components and inside out, upper side and bottom side
3. It is defined that Rated resistance value of RLP and MLP is resistance value placed on Kamaya recommended land pattern.
If use very different land pattern from Kamaya, it is possible that rated resistance value and tolerance do not meet the spec.
4. For soldering condition, please refer to "SMD Product handling manual".



Chip Fuse Selection Guide

Various type Chip Fuse line up, High Inrush performance, Fast acting with low internal resistance value and High rated voltage etc.
New Fuse line up available for over 100V for power supply applications.

Category	Series		Type	Electrical Characteristics		Size Lineup					Features
						1005(0402)	1608(0603)	2012(0805)	3216(1206)	6126(2410)	
Secondary side fuse	FCC/FHC	AB	General-purpose	Ir×200%	5s Max.				—	—	· 2 types of the line-up fusing characteristics. · 4 size line-up.
		AD		Ir×250%	5s Max.					—	
	FCCR	AB	Low internal resistance value	Ir×200%	5s Max.			—	—	—	· Lower internal resistance value compared to FCC AB series. · High interrupting rating 50Vdc / 50A for 1608mm size.
	FMC	WB AB	Low Ohm Fast Acting	Ir×200%	5s Max.			—	—	—	· Low consumption power by low internal resistance value. · Fast acting fusing with anti pulse characteristics
		WH AH	In-rush Withstand	Ir×200%	5s Max.			—	—	—	· Small size with anti pulse characteristics. · New Line up 1005mm size.
	SBF	AS	Slow Blow	Ir×200%	120s Max.	—	—	—		—	· High anti pulse characteristics by slow blow fusing.
	HFC	AG	High rated voltage	Ir×200%	60s Max.	—	—	—		—	· High rated voltage 76Vdc with low profile structure. · Line up of Rated current, Max. 12.5A
Primary side fuse	PFC	AP	General-purpose	Ir×200%	5s Max.	—	—	—	—		· High Rated voltage 125V a.c. /d.c. available. · Excellent fusing characteristics by special structure.
		AG		Ir×200%	60s Max.						

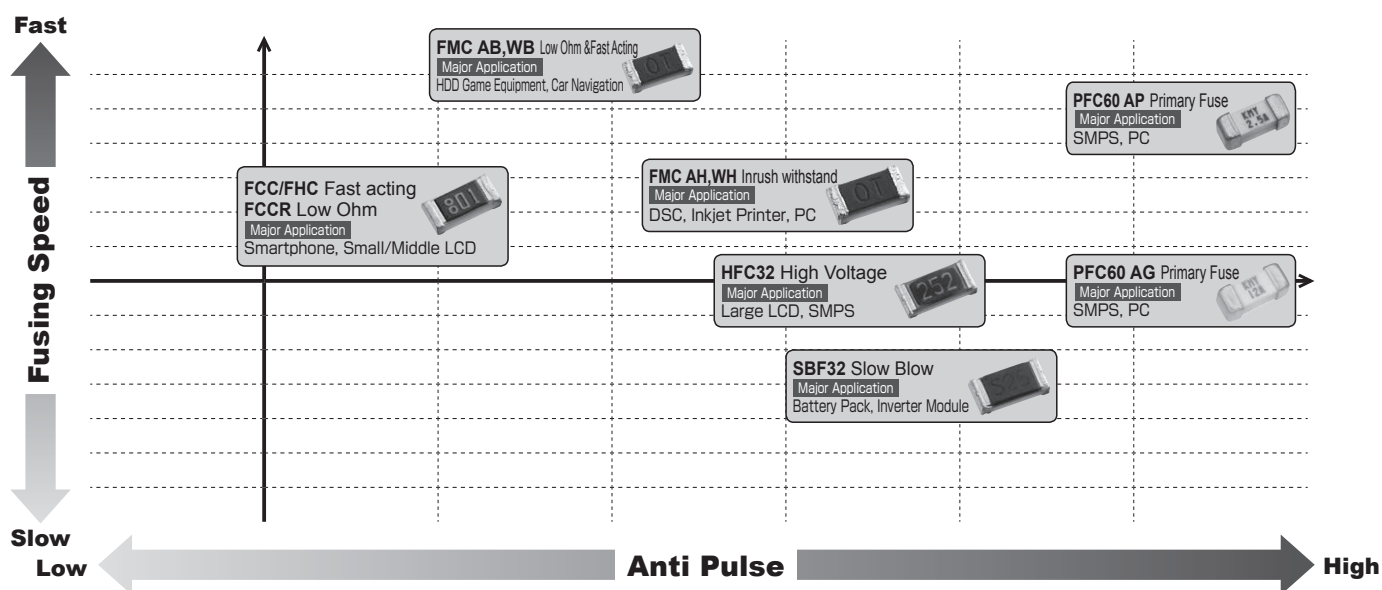

Support of Chip Fuse Selection

We would like to support the customer to find the appropriate Kamaya chip fuse if the following conditions of usage are provided.
Please contact Kamaya Sales Dept for details.

- The item you would like to check.
 - Circuit Voltage : Max voltage value of circuit fuses mounted on.
 - Steady-State Current : Current value flown fuses on normal condition.
 - Ambient Temperature : Temperature around fuses.
 - Wave form (In-rush Current) : It rapidly flows on circuit when power supply is turned on.
- Please contact Kamaya sales dept, we can provide Application Guide for Fuse selection.

RMC


Halogen Free

Antimony Free

● Features

01005 to 2512 inch size and Jumper chip available.
Precise dimension by Laser-scriber method (RMC1/20, RMC1/32).
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified. (RMC1/32 is not qualified.)

● Dimensions

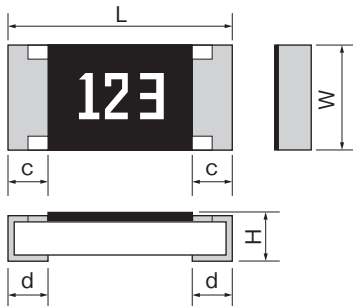

Please refer to Specification (Reference) at the Website for Marking.

Rated resistance value marking is 3-digit on the over coating except RMC1/16S & RMC1/20 & RMC1/32.
4-digit marking is available for F & G tolerance except RMC1/16, RMC1/16S & RMC1/20 & RMC1/32 type.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RMC1/32	0402	01005	0.4±0.02	0.2 ±0.02	0.13±0.02	0.08 ±0.03	0.1 ±0.03	0.035mg
RMC1/20	0603	0201	0.6±0.03	0.3 ±0.03	0.23±0.03	0.1 ±0.05	0.15 ±0.05	0.16mg
RMC1/16S	1005	0402	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.1	0.25 ^{+0.15} _{-0.05}	0.6mg
RMC1/16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3 ±0.1	0.3 ±0.1	2mg
RMC1/10	2012	0805	2.0±0.1	1.25 ±0.10	0.55±0.10	0.4 ±0.2	0.4 ±0.2	5mg
RMC1/8	3216	1206	3.1±0.1	1.6 ±0.15	0.55±0.10	0.5 ±0.25	0.5 ±0.25	9mg
RMC1/4	3225	1210	3.1±0.15	2.5 ±0.15	0.55±0.15	0.5 ±0.25	0.5 ±0.25	16mg
RMC1/2	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.6 ±0.2	0.6 ±0.2	25mg
RMC1	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.6 ±0.2	0.6 ±0.2	40mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range				Tolerance on Rated Resistance	Temperature Coefficient of Resistance Code	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
			10Ω	100Ω	1MΩ	10MΩ					
RMC1/32	0402 (01005)	0.03 (0.5A)	1 ~ 4.3 4.7 ~ 9.1				J F, J	+ 600 ~ -200 ± 300 ± 200	15	50	-55 ~ +125
RMC1/20	0603 (0201)	0.05 (1.0A)	1 ~ 3.92 4.02 ~ 9.76		100 ~ 1M		F, J B, D, F, G, J F, J	+ 600 ~ -200 ± 350 ~ -100 ± 200	25		
RMC1/16S	1005 (0402)	0.1 (1.0A)	1 ~ 9.76		10 ~ 1M		F, J G, J B, D, F D, F, G, J F, J	+ 500 ~ -200 ± 200 ± 100 ± 200	50	100	
RMC1/16	1608 (0603)	0.1 (2.0A)	1 ~ 9.76		10 ~ 3.3M		F, G, J G, J B, D, F G, J F	+ 500 ~ -200 ± 200 ± 100 ± 200 ± 100	50	100	
RMC1/10	2012 (0805)	0.125 (2.0A)	1 ~ 9.76		10 ~ 2.2M	221M ~ 3.3M 3.6M ~ 10M 11M ~ 22M	F, G, J G, J B, D, F D, F, G, J F, G, J J	+ 500 ~ -200 ± 200 ± 100 ± 200 ± 200	150		-55 ~ +155
RMC1/8	3216 (1206)	0.25 (2.0A)	1 ~ 9.76		10 ~ 1M	1.02M ~ 10M 11M ~ 22M	F, G, J G, J B, D, F F, G, J J	+ 500 ~ -200 ± 200 ± 100 ± 200	200	500	
RMC1/4	3225 (1210)	0.5 (2.0A)	1 ~ 9.76		10 ~ 1M	1.02M ~ 10M 11M ~ 22M	F, J G, J B, D, F F, G, J J	+ 500 ~ -200 ± 200 ± 100 ± 200	200	500	
RMC1/2	5025 (2010)	0.75 (2.0A)	1 ~ 9.76		10 ~ 1M	1.1M ~ 22M	F, J G, J F J	+ 500 ~ -200 ± 200 ± 100 ± 200	200	500	
RMC1	6332 (2512)	1.0 (2.0A)	1 ~ 9.76		10 ~ 1M	1.1M ~ 22M	F, J G, J F J	+ 500 ~ -200 ± 200 ± 100 ± 200	200	500	

Note1. E24 series is available, E96 series is available for tolerance "F" (1%), E96 series is available for tolerance D (±0.5%), F (±1%). D (±0.5%) is Kamaya products
Note2. Rated Voltage = √(Rated Dissipation) × (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)
Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.
Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.
Note5. Jumper : Resistance value is less than 50m ohm.

● Part Number Description

Example


Style			
RMC	1/10		
Product Type			
Rated Dissipation & Size			
Code	Rated Dissipation	Metric	Inch
1/32	0.03W	0402	01005
1/20	0.05W	0603	0201
1/16S	0.1W	1005	0402
1/16	0.1W	1608	0603
1/10	0.125W	2012	0805
1/8	0.25W	3216	1206
1/4	0.5W	3225	1210
1/2	0.75W	5025	2010
1	1.0W	6332	2512

K		103		F	
Temperature Coefficient of Resistance		Resistor		Resistor	
—	Standard	—	Resistor	—	Resistor
K	±100×10 ⁻⁶ /°C	—	Jumper	—	Jumper
Rated Resistance		Resistor		Jumper	
E24 Series e.g. : 2R2=2.2 ohm 103=10k ohm	3-Digit	—	Resistor	—	Jumper
E96 Series e.g. : 10R2=10.2 ohm 1002=10k ohm	4-Digit	—	Resistor	—	Jumper
JP	Jumper	—	Jumper	—	Jumper

Tolerance on Rated Resistance	
B	±0.1%
D	±0.5%
F	±1%
G	±2%
J	±5%
None	—

TP		
*Packaging & Standard Qty. (Min.)		
B	Bulk (Loose Package)	1,000pcs. All Style
PA	Press-Pocket Paper Tape (2 mm pitch)	20,000pcs. RMC1/32
TH	Paper Tape (2 mm pitch)	15,000pcs. RMC1/20
TP	Paper Tape	10,000pcs. RMC1/16S
TE	Embossed Tape	5,000pcs. RMC1/16
		4,000pcs. RMC1/10
		RMC1/8
		RMC1/4
		RMC1/2
		RMC1

*Refer to Tape and Packaging information on pages 52 and 53.
*Please contact Kamaya sales department for 1mm pitch taping of RMC1/16S, 1/20.



Chip Resistors

General purpose

KAMAYA OHM <http://www.kamaya.co.jp>

AEC-Q200

RGC


Halogen Free

Antimony Free

●Features

Suitable for precision applications.
High stabilized characteristics and Performance equivalent to thin film chip resistors.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified. (RGC1/32 is not qualified.)

●Dimensions



Rated resistance value marking is with 3-digit (E24) or 4-digit (E96) on the over coating.
RGC1/16 : only 3-digit marking is available.
RGC1/16S, 1/20, 1/32 : only No marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RGC1/32	0402	01005	0.4±0.02	0.2 ±0.02	0.13 ±0.02	0.08 ±0.03	0.1 ±0.03	0.035mg
RGC1/20	0603	0201	0.6±0.03	0.3 ±0.03	0.23 ±0.03	0.1 ±0.05	0.15 ±0.05	0.16mg
RGC1/16S	1005	0402	1.0±0.05	0.5 ±0.05	0.35 ±0.05	0.2 ±0.1	0.25 ^{+0.05} _{-0.10}	0.6mg
RGC1/16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45 ±0.10	0.25 ±0.10	0.3 ±0.1	2mg
RGC1/10	2012	0805	2.0±0.1	1.25 ±0.10	0.6 ±0.1	0.4 ±0.2	0.4 ±0.2	5mg
RGC1/8	3216	1206	3.1±0.1	1.6 ±0.15	0.6 ±0.1	0.5 ±0.25	0.5 ±0.25	9mg

*Values for reference

●Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range				Tolerance on Rated Resistance	Temperature Coefficient of Resistance		Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
			10Ω	100Ω	1kΩ	1MΩ		Code	10 ⁻⁶ /°C			
RGC1/32	0402 (01005)	0.03			100 ~ 100k		D(±0.5%)	C	± 50	15	50	-55~+125
RGC1/20	0603 (0201)	0.05		51 ~ 976			B(±0.1%) D(±0.5%)	K C	±100 ± 50	25		-55~+155
RGC1/16S	1005 (0402)	0.063	10 ~ 97.6		100 ~ 1M		B(±0.1%) D(±0.5%) F(±1%)	K C K	±100 ± 50 ±100	50	100	
						1.02M ~ 3.3M						
			3.3 ~ 97.6									
RGC1/16	1608 (0603)	0.1	10 ~ 97.6				B(±0.1%) D(±0.5%) F(±1%)	K C K	±100 ± 50 ±100	150		
				100 ~ 1M								
					1.02M ~ 3.3M							
RGC1/10	2012 (0805)	0.125	3.3 ~ 97.6				D(±0.5%), F(±1%)	C	± 50	200		
				10 ~ 3.3M			B(±0.1%), D(±0.5%), F(±1%)					
RGC1/8	3216 (1206)	0.25	3.3 ~ 97.6				F(±1%)	C	± 50			
				10 ~ 4.7M			B(±0.1%), D(±0.5%), F(±1%)					

Note1. E24, E96 are available for "F"(1%), "D"(0.5%) and "B"(0.1%)

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

Style		C		473		D		TP			
Product Type		Temperature Coefficient of Resistance		Rated Resistance		Tolerance on Rated Resistance		* Packaging & Standard Qty. (Min.)			
		C	± 50×10 ⁻⁶ /°C			B	±0.1%	B	Bulk (Loose Package)	1,000pcs.	All Style
		K	±100×10 ⁻⁶ /°C			D	±0.5%	PA	Press-Pocket	20,000pcs.	RGC1/32
						F	±1.0%		Paper Tape (2mm pitch)	15,000pcs.	RGC1/20
								TH	Paper Tape (2mm pitch)	10,000pcs.	RGC1/16S
								TP	Paper Tape	5,000pcs.	RGC1/16 RGC1/10 RGC1/8
Rated Dissipation & Size											
Code	Rated Dissipation	Metric	Inch								
1/32	0.03W	0402	01005								
1/20	0.05W	0603	0201								
1/16S	0.063W	1005	0402								
1/16	0.1W	1608	0603								
1/10	0.125W	2012	0805								
1/8	0.25W	3216	1206								

*Refer to Tape and Packaging information on pages 52 and 53.

*Please contact Kamaya sales department for 1mm pitch taping of RGC1/16s, 1/20.

*Refer to Tape and Packaging information on pages 52 and 53.
*Please contact Kamaya sales department for 1mm pitch taping of RGC1/16S, 1/20.

RNC


Halogen Free

Antimony Free

Pb Free

- **Features** Suitable for high precision, higher stability and reliability applications.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
ROHS compliant and total lead free (Pb<100ppm).

● Dimensions

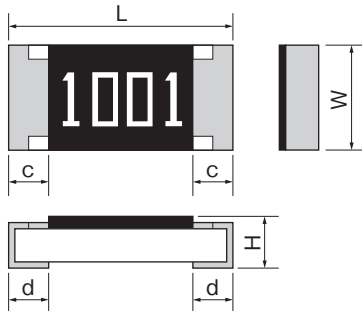


RNC20, RNC32 : Rated resistance value is marked with 3digits or 4digits on the over coating.
Please contact Kamaya sales dept. for detail information.
RNC06 : only No marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RNC06	0603	0201	0.6 ±0.03	0.3 ±0.03	0.23 ±0.03	0.1 ±0.05	0.15 ±0.05	0.16mg
RNC20	2012	0805	2.0 ±0.15	1.25 ^{+0.10} _{-0.05}	0.6 ±0.1	0.4 ±0.2	0.3 ^{+0.2} _{-0.1}	5mg
RNC32	3216	1206	3.1 ±0.1	1.55 ^{+0.10} _{-0.05}	0.6 ±0.1	0.45 ±0.20	0.3 ^{+0.2} _{-0.1}	9mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance		Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C	
					Code	10 ⁻⁶ /°C					
 RNC06	0603 (0201)	0.05	100Ω~12kΩ	B (±0.1%)	E	±25	15	E96 E24	50	—55~+155	
			27Ω~12kΩ	D (±0.5%)	C	±50					
			27Ω~22kΩ	F (±1%)	E	±25					
				C	±50						
RNC20	2012 (0805)	0.1	100Ω~130kΩ	B (±0.1%)	E	±25	100	E96 E24	100		
			10Ω~130kΩ	C (±0.25%) D (±0.5%)							
RNC32	3216 (1206)	0.125	100Ω~180kΩ	B (±0.1%)			200				
			10Ω~180kΩ	C (±0.25%) D (±0.5%)							

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● Part Number Description

Example

Example

Style			E		1002		B		TP			
RNC			32		Temperature Coefficient of Resistance		Tolerance on Rated Resistance		* Packaging & Standard Qty. (Min.)			
Product Type			E		C		B		C		D	
Size			±25×10 ⁻⁶ /°C		±50×10 ⁻⁶ /°C		±0.1%		±0.25%		±0.5%	
Code	Metric	Inch					F		±1%			
06	0603	0201										
20	2012	0805										
32	3216	1206										

Rated Resistance			
E24 Series e.g. : 103=10k ohm		3-Digit	
E96 Series e.g. : 10R2=10.2 ohm 1002=10k ohm		4-Digit	

* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Style
PA	Press-Pocket Paper Tape (2mm pitch)	15,000pcs.	RNC06
TP	Paper Tape	5,000pcs.	RNC20 RNC32

*Refer to Tape and Packaging information on pages 52 and 53.

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Pb free

KAMAYA OHM <http://www.kamaya.co.jp>

NEW

RMPC


Halogen Free

Antimony Free

Pb Free

- **Features** EU ROHS compliance
RoHS compliant and total lead free(Pb<100ppm)

● Dimensions

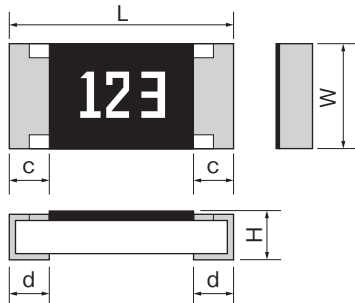

Rated resistance value is marked with 3digits or 4digits on the over coating.

RMPC16 : only 3 digits marking is available.

RMPC10, RMPC06, RMPC04 : only No marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RMPC04	0402	01005	0.4 ±0.02	0.2 ±0.02	0.13±0.02	0.08±0.03	0.1 ±0.03	0.035mg
RMPC06	0603	0201	0.6 ±0.03	0.3 ±0.03	0.23±0.03	0.1 ±0.05	0.15±0.05	0.16mg
RMPC10	1005	0402	1.0 ±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.1	0.25 ^{+0.15} _{-0.05}	0.6mg
RMPC16	1608	0603	1.6 ±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3 ±0.1	0.3 ±0.1	2mg
RMPC20	2012	0805	2.0 ±0.1	1.25±0.10	0.55±0.10	0.4 ±0.2	0.4 ±0.2	5mg
RMPC32	3216	1206	3.1 ±0.1	1.6 ±0.15	0.55±0.10	0.5 ±0.25	0.5 ±0.25	9mg
RMPC35	3225	1210	3.1 ±0.15	2.5 ±0.15	0.55±0.15	0.5 ±0.25	0.5 ±0.25	16mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RMPC04	0402 (01005)	0.03 (0.5A)	10Ω ~ 97.6Ω	-	+600 ~ 0	F (±1%) J (±5%)	15	50	-55 ~ +125
			100Ω ~ 1MΩ		±200		25		
RMPC06	0603 (0201)	0.05 (1.0A)	1Ω ~ 9.76Ω		+800 ~ -100			100	
			10Ω ~ 97.6Ω		+600 ~ 0		150		
			100Ω ~ 10MΩ	±200	200			500	
RMPC10	1005 (0402)	0.063 (1.0A)	<div>1Ω ~ 9.76Ω</div> <div>10Ω ~ 97.6Ω</div> <div>100Ω ~ 10MΩ</div> <div>-</div> <div>+800 ~ -100</div> <div>+500 ~ -200</div> <div>±200</div>				100		
RMPC16	1608 (0603)	0.1 (1.0A)			150			500	
RMPC20	2012 (0805)	0.125 (2.0A)					200		
RMPC32	3216 (1206)	0.25 (2.0A)							
RMPC35	3225 (1210)	0.33 (2.0A)							

Note1. E24 series is available , E96 series is available for tolerance"F"(1%),

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Note4. Jumper : Resistance value is less than 50m ohm.

● Part Number Description

Example

Style			—			103			F			TP		
Product Type			Temperature Coefficient of Resistance			Tolerance on Rated Resistance						* Packaging & Standard Qty. (Min.)		
			— Standard Resistor			F ±1% Resistor						B Bulk (Loose Package) 1,000pcs. All Style		
			None — Jumper			J ±5% Resistor						PA Press-Pocket Paper Tape (2mm pitch) 20,000pcs. RMPC04		
						None — Jumper						TH Paper Tape (2mm pitch) 10,000pcs. RMPC10		
Rated Dissipation & Size						Rated Resistance						TP Paper Tape 5,000pcs. RMPC16 RMPC20 RMPC32		
Code	Metric	Inch				E-24 Series e.g. : 2R2=2.2 ohm 103=10k ohm 3-Digit Resistor						TE Embossed Tape 4,000pcs. RMPC35		
04	0402	01005				E-96 Series e.g. : 10R2=10.2 ohm 1002=10k ohm 4-Digit								
06	0603	0201				JP Jumper								
10	1005	0402												
16	1608	0603												
20	2012	0805												
32	3216	1206												
35	3225	1210												

*Refer to Tape and Packaging information on pages 52 and 53.

*Refer to Tape and Packaging information on pages 52 and 53.

NEW RMCH


AEC-Q200

Halogen Free

Antimony Free

- **Features** Implemented high rated voltage RMCH16=0.25W RMC1/16(1608 general purpose)=0.1W 2.5 times as much as RMC1/16.
Rated dissipation 2512inch : 2W.

● Dimensions

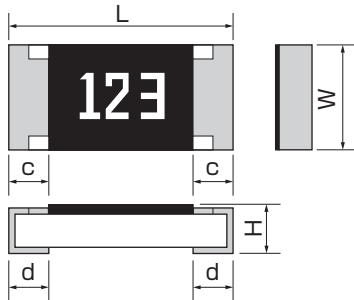

Rated resistance value is marked with 3digits or 4digits on the over coating.
RMCH16 : only 3 digits marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RMCH16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.2	0.3±0.1	2mg
RMCH20	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.3±0.2	0.3±0.2	5mg
RMCH32	3216	1206	3.1±0.1	1.6 ±0.15	0.55±0.10	0.4±0.25	0.5±0.25	9mg
RMCH35	3225	1210	3.1±0.15	2.5 ±0.15	0.55±0.15	0.4±0.25	0.5±0.25	16mg
★ RMCH50	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.4±0.25	0.6±0.2	25mg
★ RMCH63	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.4±0.25	0.6±0.2	40mg

★ : Under Development

*Values for reference

● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RMCH16	1608 (0603)	0.25	<div><div>1Ω ~49.9Ω</div><div>51Ω ~ 1MΩ</div><div>1Ω ~ 47Ω</div><div>51Ω ~ 1MΩ</div></div> <div><div>-</div><div>K</div><div>-</div><div>-</div></div> <div><div>+500~-200</div><div>±100</div><div>+500~-200</div><div>±200</div></div> <div><div>D (±0.5%) F (± 1%)</div><div>J (± 5%)</div></div>				150	150	-55~-+155
RMCH20	2012 (0805)	0.33					200	500	
RMCH32	3216 (1206)	0.5							
RMCH35	3225 (1210)	0.75							
★ RMCH50	5025 (2010)	1							
★ RMCH63	6332 (2512)	2							

Note1. E24 series is available , E96 series is available for tolerance "F"(1%), E96 series is available for tolerance D (±0.5%), F(±1%).

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

★ : Under Development

● Part Number Description

Example

Example

Style		K	103	D	TP				
RMCH	16								
Product Type		K	103	D	TP				
Size									
16	1608	K	103	D	TP				
20	2012								
32	3216	K	103	D	TP				
35	3225								
50	5025	K	103	D	TP				
63	6332								
Temperature Coefficient of Resistance		K	103	D	TP				
K	$\pm 100 \times 10^{-6} / ^\circ \text{C}$								
—	$\pm 200 \times 10^{-6} / ^\circ \text{C}$								
Rated Resistance		K	103	D	TP				
E24 Series e.g. : 103 = 10k Ω 3-Digit									
E96 Series e.g. : 1002 = 10k Ω		K	103	D	TP				
4-Digit									
Tolerance on Rated Resistance		K	103	D	TP				
D	$\pm 0.5\%$								
F	$\pm 1\%$								
J	$\pm 5\%$	K	103	D	TP				
* Packaging & Standard Qty. (Min.)									
B	Bulk (Loose Package)					1,000pcs.	All Style		
TP	Paper Tape	5,000pcs.	RMCH16 RMCH20 RMCH32						
TE	Embossed Tape	4,000pcs.	RMCH35 RMCH50 RMCH63						

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Wide termination

KAMAYA OHM <http://www.kamaya.co.jp>

NEW
TWMC


AEC-Q200

Halogen Free

Antimony Free

- **Features** Downsizing and High rated dissipation by wide termination structure
Downsizing and space reduction
High solderability strength and reliability by wide termination structure.
AEC-Q200 Qualified.

● Dimensions

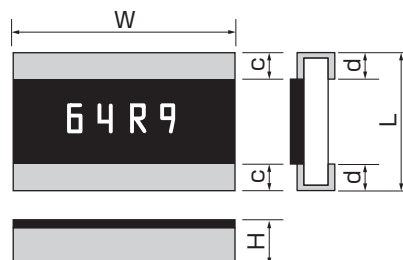

Rated resistance is marked with 4-digit on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
TWMC32	1632	0612	1.6±0.2	3.2±0.2	0.55±0.1	0.5±0.25	0.5±0.25	9mg
TWMC50	2550	1020	2.5±0.15	5.0±0.2	0.55±0.1	0.6±0.2	0.6±0.2	25mg
TWMC63	3263	1225	3.2±0.2	6.3±0.2	0.55±0.1	0.6±0.2	0.6±0.2	40mg

*Values for reference

● Rating


Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Limiting Element Voltage V	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Category Temperature Range °C
					Code	10 ⁻⁶ /°C		
TWMC32	1632 (0612)	0.75	200	1Ω~1MΩ	—	±200	F (±1%) J (±5%)	-55~+155
TWMC50	2550 (1020)	1.0						
TWMC63	3263 (1225)	2.0						

Note1. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s Voltage)

Note2. Rated Current= $\sqrt{(\text{Rated Dissipation}) / (\text{Rated Resistance})}$.

● Part Number Description

Example

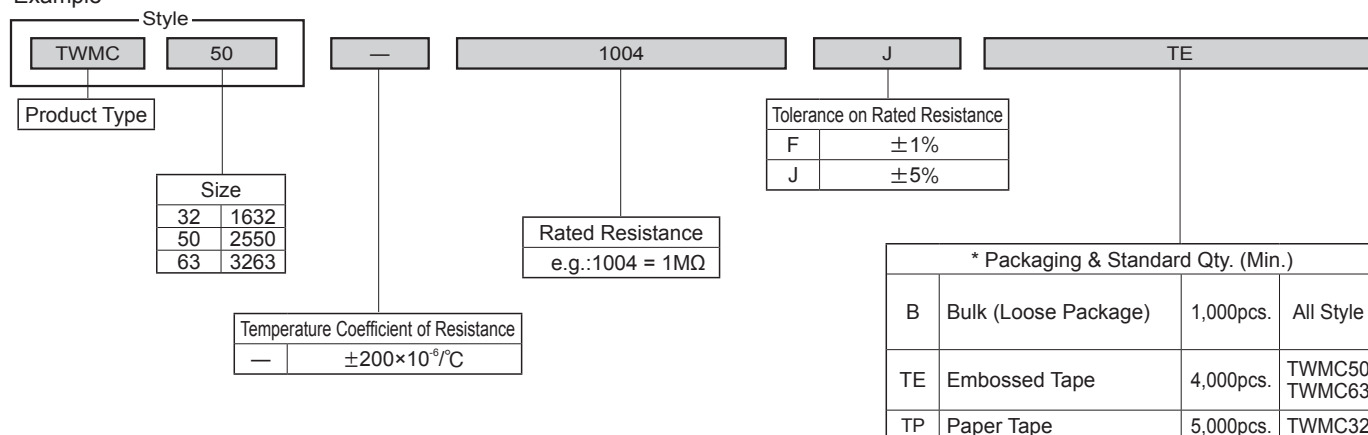

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Anti-Sulfuration

KAMAYA OHM <http://www.kamaya.co.jp>

AEC-Q200

RMAW

Anti-Sulfuration


Halogen Free

Antimony Free

●Features

Special electrode structure, High anti-sulfuration performance, Line up Anti-sulfuration Chip Resistors.
Special electrode type High anti-sulfuration performance electrode inside.
Qualified for hydrogen sulfide test, H₂S: 3ppm, 40°C, 90%R.H., 1000h.
AEC-Q200 qualified.

●Dimensions



Rated resistance value marking is on the over coating except RMAW06, RMAW10.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RMAW06	0603	0201	0.6±0.03	0.3 ±0.03	0.23±0.03	0.1±0.05	0.15±0.05	0.16mg
RMAW10	1005	0402	1.0±0.05	0.5 ±0.05	0.35±0.1	0.2±0.2	0.25±0.10	0.6mg
RMAW16	1608	0603	1.6±0.2	0.8 ±0.1	0.45±0.15	0.3±0.1	0.3 ±0.15	2mg
RMAW20	2012	0805	2.0±0.1	1.25±0.10	0.50±0.15	0.4±0.2	0.4 ±0.2	5mg
RMAW32	3216	1206	3.1±0.1	1.6 ±0.1	0.6 ±0.15	0.5±0.2	0.45±0.2	9mg

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Combinations of Rated Resistance Range of Tolerance on Rated Resistance			Temperature Coefficient of Resistance		Limiting Element Voltage V	Category Temperature Range ℃
			D(±0.5%)	F(±1%)	J(±5%)	Code	10 ⁻⁶ /℃		
RMAW06	0603 (0201)	0.05 (1.0A)	51Ω ~ 1MΩ			K	±100	25	-55~+155
			—	1.02MΩ ~ 10MΩ		—	±200		
			10Ω ~ 49.9Ω						
			—	1.0Ω ~ 9.76Ω		—	+600~-200		
RMAW10	1005 (0402)	0.1 (1.0A)						50	
RMAW16	1608 (0603)	0.1 (1.0A)						75	
RMAW20	2012 (0805)	0.125 (1.5A)						150	
RMAW32	3216 (1206)	0.25 (2.0A)						200	

Note1. E24 series is available, E96 series is available for tolerance "D" (0.5%) and "F" (1%).

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Note5. Jumper: Resistance Value is less than 50m ohm

●Part Number Description

Example

Example

Style		K		103		F		TP	
RMAW		20							
Product Type									
						</			

NEW

RMGW

AEC-Q200


Halogen Free

Antimony Free

Anti-Sulfuration

- **Features** Special electrode structure, High anti-sulfuration Performance, New Line up Anti-sulfuration Chip Resistors.
Barrier layer inside of electrode to prevent Sulfuration and Disconnection.
AEC-Q200 qualified

● Dimensions

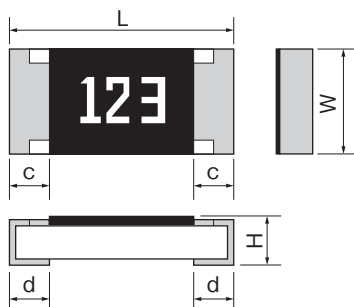

Rated resistance value marking is with 3-digit (E24) or 4-digit (E96) on the over coating except RMGW10.
4-digit marking is available for F tolerance except RMGW16 & RMGW10.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RMGW10	1005	0402	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2±0.1	0.25 ^{+0.05/-0.10}	0.6mg
RMGW16	1608	0603	1.6±0.1	0.8 ^{+0.15/-0.05}	0.45±0.10	0.3±0.1	0.3 ±0.1	2mg
RMGW20	2012	0805	2.0±0.1	1.25 ±0.10	0.55±0.10	0.4±0.2	0.4 ±0.2	5mg
RMGW32	3216	1206	3.1±0.1	1.6 ±0.15	0.55±0.10	0.5±0.25	0.5 ±0.25	9mg
RMGW35	3225	1210	3.1±0.15	2.5 ±0.15	0.55±0.15	0.5±0.25	0.5 ±0.25	16mg
★ RMGW50	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.6±0.2	0.6 ±0.2	25mg
★ RMGW63	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.6±0.2	0.6 ±0.2	40mg

★ : Under Development

*Values for reference

● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RMGW10	1005 (0402)	0.1 (1.0A)	1Ω~9.76Ω 10Ω~1MΩ 1.02MΩ~10MΩ	-	+500~-200 ± 100 ± 200	F (± 1%) J (± 5%) D (± 0.5%) F (± 1%) J (± 5%)	50	100	-55~+155
RMGW16	1608 (0603)	0.1 (1.0A)					150		
RMGW20	2012 (0805)	0.125 (2.0A)					200	500	
RMGW32	3216 (1206)	0.25 (2.0A)							
RMGW35	3225 (1210)	0.33 (2.0A)							
★ RMGW50	5025 (2010)	0.75							
★ RMGW63	6332 (2512)	1							

Note1. E24 series is available , E96 series is available for tolerance "F"(1%), E96 series is available for tolerance D (±0.5%), F(±1%).

Note2. Rated Voltage= √(Rated Dissipation) × (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

★ : Under Development

● Part Number Description

Example

Style		Product Type		Temperature Coefficient of Resistance		Tolerance on Rated Resistance		TP			
RMGW	16			K	103	D		* Packaging & Standard Qty. (Min.)			
								B	Bulk (Loose Package)	1,000pcs.	All Style
								TH	Paper Tape (2mm pitch)	10,000pcs.	RMGW10
								TP	Paper Tape	5,000pcs.	RMGW16 RMGW20 RMGW32
								TE	Embossed Tape	4,000pcs.	RMGW35 RMGW50 RMGW63

*Refer to Tape and Packaging information on pages 52 and 53.

17


RVC

Halogen Free

Antimony Free

- **Features** Higher Limiting Element Voltage compared with RMC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

● Dimensions

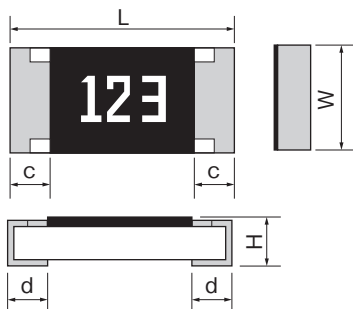

Rated resistance is marked with 3-digit (E24) or 4-digit (E96) on the over coating.
RVC16 : only 3-digit marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RVC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3±0.1	2mg
RVC20	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.4±0.2	0.4±0.2	5mg
RVC32	3216	1206	3.1±0.1	1.6 ±0.15	0.55±0.10	0.5±0.25	0.5±0.25	9mg
RVC50	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.6±0.2	0.6±0.2	25mg
RVC63	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.6±0.2	0.6±0.2	40mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Limiting Element Voltage V	Combinations of Rated Resistance Range and Tolerance on Rated Resistance			Temperature Coefficient of Resistance		Isolation Voltage V	Category Temperature Range ℃	
				D(±0.5%)	F(±1%), G(±2%)	J(±5%), K(±10%)	Code	10 ⁻⁶ /℃			
RVC16	1608 (0603)	0.1	200	470Ω ~ 10MΩ			K	±100	100	-55~+155	
				47Ω ~ 464Ω			—	±200			
RVC20	2012 (0805)	0.25	400	100Ω ~ 10MΩ		100Ω ~ 51MΩ	K	±100	500		
				47Ω ~ 97.6Ω			—	±200			
RVC32	3216 (1206)	0.25	500	100Ω ~ 10MΩ		100Ω ~ 51MΩ	K	±100			
				47Ω ~ 97.6Ω			—	±200			
RVC50	5025 (2010)			0.5	470Ω ~ 10MΩ	470Ω ~ 20MΩ	470Ω ~ 51MΩ	K			±100
					47Ω ~ 464Ω			—			±200
RVC63	6332 (2512)	1.0	800	560Ω ~ 10MΩ	560Ω ~ 20MΩ	560Ω ~ 51MΩ	K	±100			
				100Ω ~ 549Ω			—	±200			
				47Ω ~ 97.6Ω			—	+ 500 ~ -200			

Note1. E24 series is available, E96 series is available for tolerance "D" (0.5%) and "F" (1%)

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● Part Number Description

Example

Style		K		475		F		TP	
Product Type		Temperature Coefficient of Resistance		Rated Resistance		Tolerance on Rated Resistance		* Packaging & Standard Qty. (Min.)	
Size		—		E24 Series		D ±0.5%		B Bulk (Loose Package)	
Code		Standard		e.g. : 475=4.7M ohm		F ± 1%		TP Paper Tape	
Metric		±100×10 ⁻⁶ /°C		E96 Series		G ± 2%		TE Embossed Tape	
Inch				e.g. : 7154=7.15M ohm		J ± 5%			
						K ± 10%			

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

High Voltage

KAMAYA OHM <http://www.kamaya.co.jp>

AEC-Q200

RZC


Halogen Free

Antimony Free

●Features

Suitable for the backlight inverter for large-screen LCD.
Higher Limiting Element Voltage than RVC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

●Dimensions

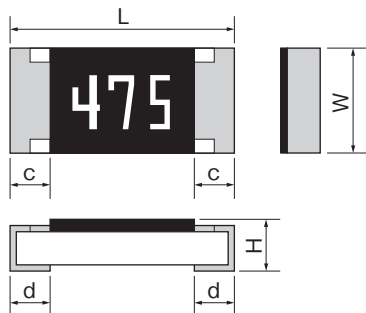

Rated resistance is marked with 3-digit(E24) on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RZC50	5025	2010	5.0±0.15	2.5 ± 0.15	0.55±0.15	0.6±0.2	0.6±0.2	25mg
RZC63	6332	2512	6.3±0.15	3.2 ± 0.15	0.55±0.15	0.6±0.2	0.6±0.2	40mg

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Limiting Element Voltage V	Anti-Rush Voltage Characteristics V	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 104/°C	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
RZC50	5025 (2010)	0.5	1500	3000	1.0MΩ~16MΩ	J(±5%) K(±10%) M(±20%)	±200	E24	500	-55~-+125
RZC63	6332 (2512)	1.0	2000							


Note1. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors, when the resistance values is equal to or higher than the critical resistance value.

Note3. Anti-Rush Voltage Characteristics : 3,000V, 1sec "On", 9sec "off" ,100,000 times, Room temperature.

●Part Number Description

Example

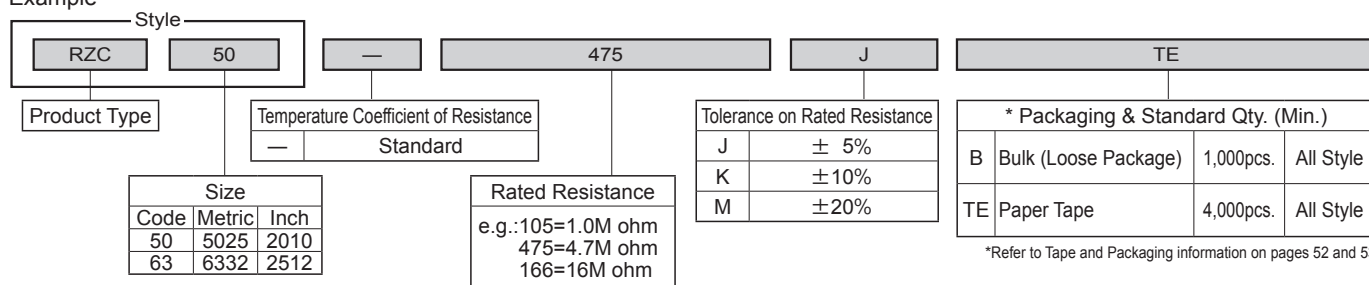

★Under Development

RVAC

AEC-Q200


Anti-Sulfuration

Halogen Free

Antimony Free

●Features High voltage chip resistors combined with anti-sulfuration performance.

●Dimensions

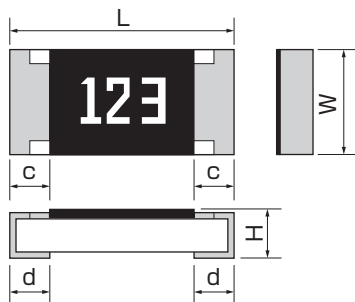

Rated resistance value is marked with 3digits or 4digits on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RVAC32	3216	1206	3.1±0.1	1.6±0.15	0.55±0.10	0.5±0.25	0.5±0.25	9mg

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range of Tolerance on Rated Resistance			Temperature Coefficient of Resistance		Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
			D(±0.5%)	F(±1%)	J(±5%)	Code	10 ⁻⁶ /°C			
RVAC32	3216 (1206)	0.25	100kΩ ~ 10MΩ		100Ω ~ 51MΩ	K	± 100	500	500	-55~+155
			47Ω ~ 97.6Ω			—	± 200			

Note1. E24 series is available, E96 series is available for tolerance "F"(1%), E96 series is available for tolerance "D" (±0.5%), F(±1%).


Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Part Number Description

Example

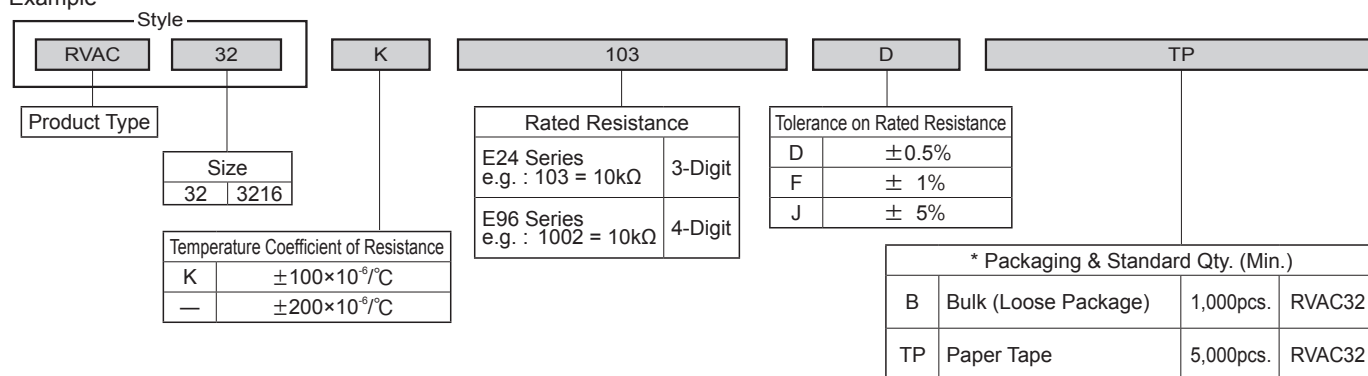

*Refer to Tape and Packaging information on pages 52 and 53.


RPC

Halogen Free

Antimony Free

- **Features** Higher Anti surge performance compared with RMC series.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

● Dimensions

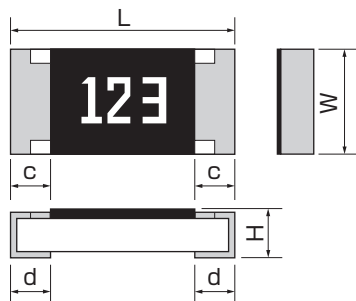

Rated resistance value is marked with 3-digit on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
NEW RPC16	1608	0603	1.6±0.1	0.8 ^{+0.15/-0.05}	0.45±0.10	0.3±0.2	0.3±0.1	2mg
RPC20	2012	0805	2.0±0.1	1.25±0.10	0.55±0.10	0.3±0.2	0.4±0.2	5mg
RPC32	3216	1206	3.1±0.1	1.6 ±0.15	0.55±0.10	0.3±0.2	0.5±0.25	9mg
RPC35	3225	1210	3.1±0.15	2.5 ±0.15	0.55±0.15	0.3±0.2	0.5±0.25	16mg
RPC50	5025	2010	5.0±0.15	2.5 ±0.15	0.55±0.15	0.3±0.15	0.6±0.2	25mg
RPC63	6332	2512	6.3±0.15	3.2 ±0.15	0.55±0.15	0.3±0.15	0.6±0.2	40mg

*Values for reference

● Rating



Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Combinations of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
			Rated Resistance Range	Temperature Coefficient of Resistance 10 ⁻⁶ /°C					
NEW RPC16	1608 (0603)	0.25	1.0Ω~ 9.1Ω	±200	J (± 5%)	150	E24	150	-55~+155
	10Ω~ 1MΩ		±100						
RPC20	2012 (0805)	0.33	0.27Ω~0.91Ω ±200 1Ω~ 1MΩ ±100 1.1M~22MΩ ±200		J (± 5%) K (±10%) M (±20%)	200	500		
RPC32	3216 (1206)								
RPC35	3225 (1210)								
RPC50	5025 (2010)								
RPC63	6332 (2512)	1.0							

Note1. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors, when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● 1Pulse Limiting Power Curve Comparison (e.g 100Ω value for reference)

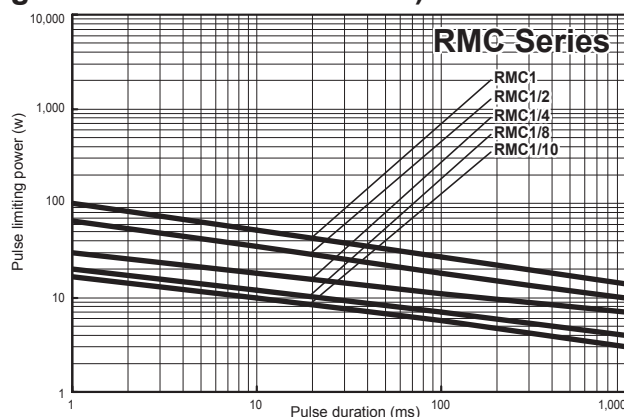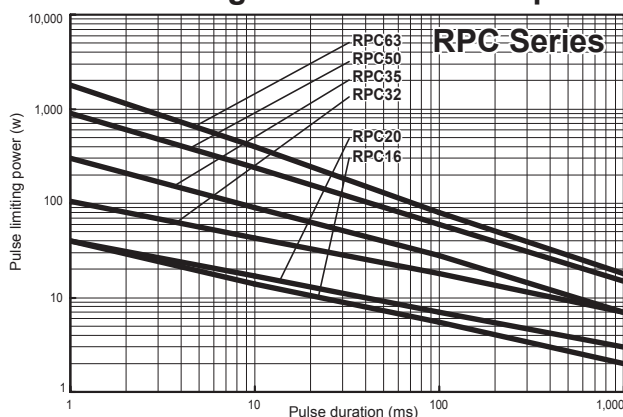

* pulse limiting power curve is different from resistance value.
* Please contact Kamaya sales department for the details.

● Part Number Description

Example

Style		
RPC	50	
Product Type	Size	
	Code	Metric Inch
	16	1608 0603
	20	2012 0805
	32	3216 1206
	35	3225 1210
	50	5025 2010
	63	6332 2512

Rated Resistance	
E24 Series e.g. : 2R2=2.2 ohm 103=10k ohm	3-Digit

Tolerance on Rated Resistance	
J	± 5%
K	± 10%
M	± 20%

* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Style
TP	Paper Tape	5,000pcs.	RPC16 RPC20 RPC32
TE	Embossed Tape	4,000pcs.	RPC35 RPC50 RPC63

*Refer to Tape and Packaging information on pages 52 and 53.

NEW

RPCH


AEC-Q200

Halogen Free

Antimony Free

- **Features** Implemented high rated voltage RPCH16=0.33W, RMC1/16(0603 inch general purpose)=0.1W, 3.3 times as much as RMC1/16. Anti-surge chip resistor with tolerance D ($\pm 0.5\%$) lined-up by unique laser trimming process.

● Dimensions

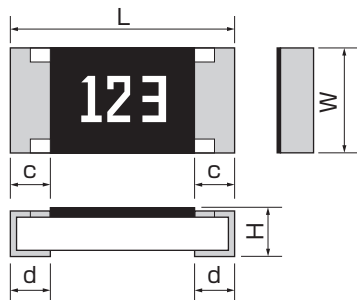

Rated resistance value is marked with 3digits or 4digits on the over coating.
RPCH16: only 3digits marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RPCH16	1608	0603	1.6 \pm 0.1	0.8 ^{+0.15} _{-0.05}	0.45 \pm 0.10	0.3 \pm 0.2	0.3 \pm 0.1	2mg
RPCH20	2012	0805	2.0 \pm 0.1	1.25 \pm 0.10	0.55 \pm 0.10	0.3 \pm 0.2	0.4 \pm 0.2	5mg
RPCH32	3216	1206	3.1 \pm 0.1	1.6 \pm 0.15	0.55 \pm 0.10	0.4 \pm 0.25	0.5 \pm 0.25	9mg
RPCH35	3225	1210	3.1 \pm 0.15	2.5 \pm 0.15	0.55 \pm 0.15	0.4 \pm 0.25	0.5 \pm 0.25	16mg

*Values for reference

● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RPCH16	1608 (0603)	0.33	<div><div>1Ω~9.76Ω</div><div>10Ω~1MΩ</div><div>1Ω~9.1Ω</div><div>10.2Ω~1MΩ</div></div> <div><div>-</div><div>K</div><div>-</div><div>K</div></div> <div><div>±200</div><div>±100</div><div>±200</div><div>±100</div></div> <div><div>D (±0.5%) F (±1%)</div><div>J (±5%)</div></div>				150	150	-55~+155
RPCH20	2012 (0805)	0.5							
RPCH32	3216 (1206)	0.66							
RPCH35	3225 (1210)	0.75							

Note1. E24 series is available, E96 series is available for tolerance "F"(1%), E96 series is available for tolerance D ($\pm 0.5\%$), F($\pm 1\%$).


Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● Part Number Description

Example

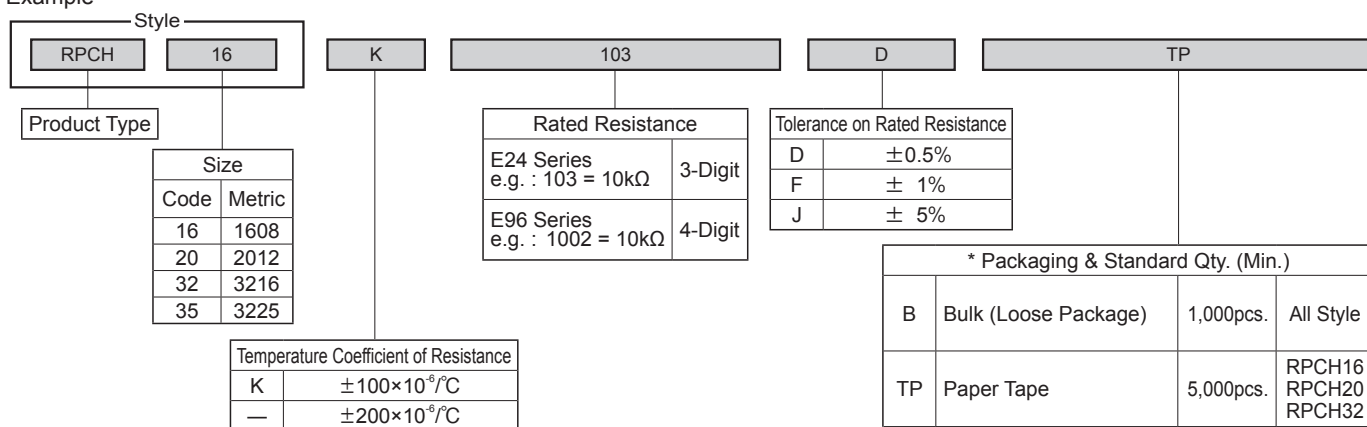

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Anti-Sulfuration

KAMAYA OHM <http://www.kamaya.co.jp>

NEW
RBX

AEC-Q200

Anti-Sulfuration

Halogen Free

Antimony Free


●Features

Anti-surge chip resistor with anti-sulfuration performance.

Anti-surge chip resistor with tolerance D ($\pm 0.5\%$) lined-up by unique laser trimming process.

Implemented high rated voltage RBX16=0.25W, RMC1/16(0603inch general purpose)=0.1W, 2.5 times as much as RMC1/16.

●Dimensions

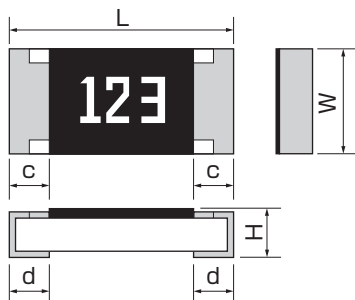

Rated resistance value is marked with 3digits or 4digits on the over coating.

RBX16 : only 3digits marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RBX16	1608	0603	1.6 \pm 0.1	0.8 ^{+0.15} _{-0.05}	0.45 \pm 0.10	0.25 \pm 0.10	0.3 \pm 0.1	2mg
RBX20	2012	0805	2.0 \pm 0.1	1.25 \pm 0.10	0.55 \pm 0.10	0.3 \pm 0.2	0.4 \pm 0.2	5mg
RBX32	3216	1206	3.1 \pm 0.1	1.6 \pm 0.15	0.55 \pm 0.10	0.4 \pm 0.25	0.5 \pm 0.25	9mg
RBX35	3225	1210	3.1 \pm 0.15	2.5 \pm 0.15	0.55 \pm 0.15	0.4 \pm 0.25	0.5 \pm 0.25	16mg
★RBX50	5025	2010	5.0 \pm 0.15	2.5 \pm 0.15	0.55 \pm 0.15	0.4 \pm 0.25	0.6 \pm 0.2	25mg
★RBX63	6332	2512	6.3 \pm 0.15	3.2 \pm 0.15	0.55 \pm 0.15	0.4 \pm 0.25	0.6 \pm 0.2	40mg

★ : Under Development

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RBX16	1608 (0603)	0.25	<div>1Ω~9.76Ω<div>-±200</div></div> <div>10Ω~1MΩ<div>K±100</div></div>			<div>D (±0.5%)</div> <div>F (± 1%)</div> <div>J (± 5%)</div>	150	150	-55~+155
RBX20	2012 (0805)	0.33					200	500	
RBX32	3216 (1206)	0.5							
RBX35	3225 (1210)	0.75							
★RBX50	5025 (2010)	1							
★RBX63	6332 (2512)	2							

Note1. E24 series is available, E96 series is available for tolerance "F"(1%), E96 series is available for tolerance D ($\pm 0.5\%$), F ($\pm 1\%$).

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)


Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

★ : Under Development

●Part Number Description

Example

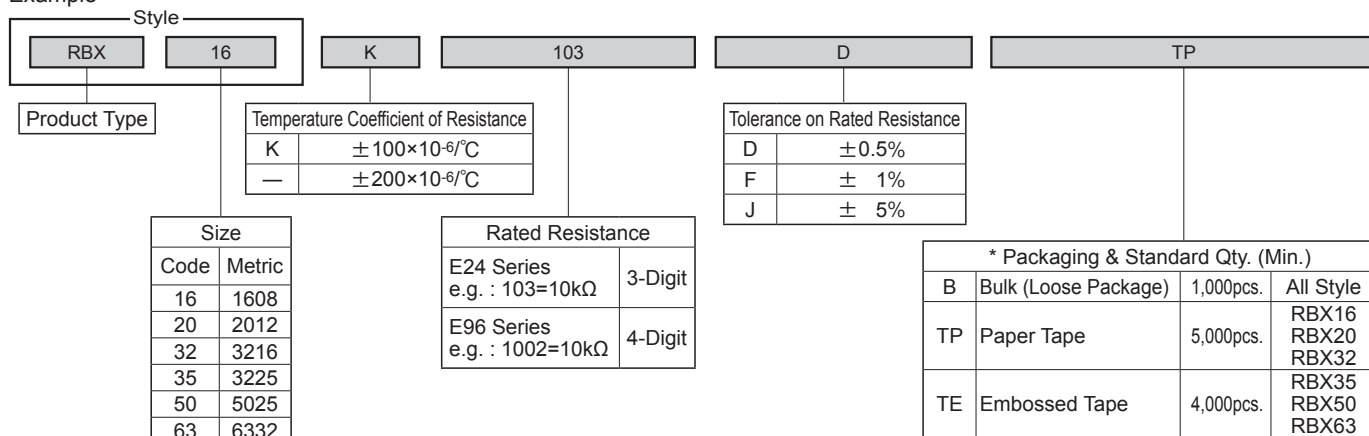

*Refer to Tape and Packaging information on pages 52 and 53.

NEW RPGW

AEC-Q200


Anti-Sulfuration

Halogen Free

Antimony Free

- **Features** Anti-surge chip resistor combined with anti-sulfuration performance.
Implemented high rated voltage RPGW16=0.33W, RMC1/16(0603inch general purpose)=0.1W, 3.3 times as much as RMC1/16.
Anti-surge chip resistor with tolerance D ($\pm 0.5\%$) lined-up by unique laser trimming process.

● Dimensions

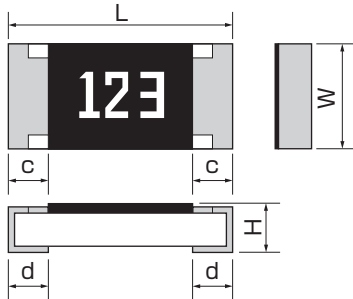

Rated resistance value is marked with 3digits or 4digits on the over coating.
RPGW16 : only 3digits marking is available.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
RPGW16	1608	0603	1.6 \pm 0.1	0.8 $^{+0.15}_{-0.05}$	0.45 \pm 0.10	0.3 \pm 0.2	0.3 \pm 0.1	2mg
RPGW20	2012	0805	2.0 \pm 0.1	1.25 \pm 0.10	0.55 \pm 0.10	0.3 \pm 0.2	0.4 \pm 0.2	5mg
RPGW32	3216	1206	3.1 \pm 0.1	1.6 \pm 0.15	0.55 \pm 0.10	0.4 \pm 0.25	0.5 \pm 0.25	9mg
RPGW35	3225	1210	3.1 \pm 0.15	2.5 \pm 0.15	0.55 \pm 0.15	0.4 \pm 0.25	0.5 \pm 0.25	16mg

*Values for reference

● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Limiting Element Voltage V	Isolation Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
RPGW16	1608 (0603)	0.33	<div>1Ω~9.76Ω<div>-±200</div></div> <div>10Ω~1MΩ<div>K±100</div></div> <div>1Ω~9.1Ω<div>-±200</div></div> <div>10Ω~1MΩ<div>K±100</div></div> <div>D (±0.5%) F (± 1%) J (± 5%)</div>				150	150	-55~+155
RPGW20	2012 (0805)	0.5							
RPGW32	3216 (1206)	0.66							
RPGW35	3225 (1210)	0.75							

Note1. E24 series is available , E96 series is available for tolerance "F"(1%), E96 series is available for tolerance D ($\pm 0.5\%$), F($\pm 1\%$).


Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note4. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● Part Number Description

Example

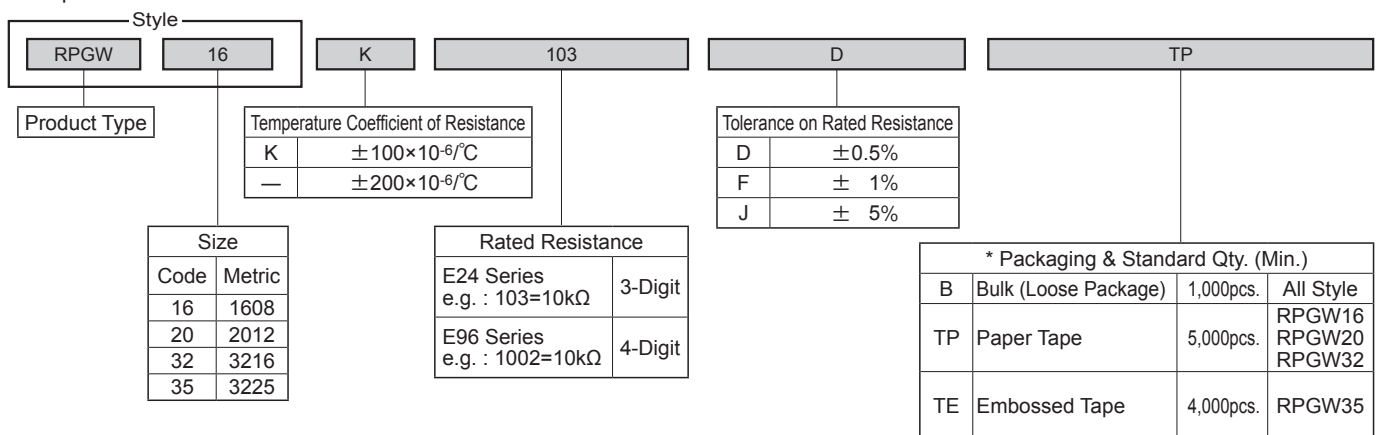

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Sensing

KAMAYA OHM <http://www.kamaya.co.jp>

AEC-Q200

RLC


Halogen Free

Antimony Free

● Features

Most suitable for a detection of current in power source circuits, motor circuits, etc.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

● Dimensions

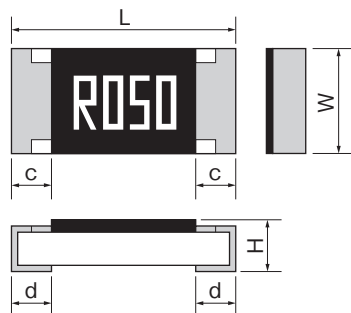

Rated resistance is marked with 4-digit on the over coating. (RLC20~RLC63)
RLC10 : only No marking is available.
Please contact KAMAYA for marking of RLC16.

Unit : mm

Style	Metric	Inch	TCR Mark	L	W	H	c	d	*Unit weight/pc.
RLC10	1005	0402	All	1.0±0.05	0.5 ±0.05	0.35±0.05	0.2 ±0.1	0.25 ^{+0.05} _{-0.10}	0.6mg
RLC16	1608	0603	- & K	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3 ±0.1	0.3 ±0.1	2mg
			L		0.5 ±0.1	0.45±0.15		0.3 ±0.2	
RLC20	2012	0805	- & K	2.0±0.1	1.25±0.10	0.6 ±0.1	0.4 ±0.2	0.4 ±0.2	5mg
			L			0.5 ±0.15		0.4 ±0.2	
RLC32	3216	1206	- & K	3.1±0.2	1.6 ±0.15	0.6 ±0.1	0.5 ±0.25	0.3 ^{+0.2} _{-0.1}	9mg
			L	3.1±0.1	1.6 ±0.1	0.6 ±0.15	0.5 ±0.2	0.45±0.20	
RLC35	3225	1210	- & K	3.1±0.2	2.5 ±0.15	0.6 ±0.15	0.5 ±0.25	0.3 ^{+0.2} _{-0.1}	16mg
			L	3.1±0.1	2.6 ±0.1	0.55±0.10	0.5 ±0.2	0.5 ±0.2	
RLC50	5025	2010	- & K	5.0±0.2	2.5 ±0.15	0.6 ±0.15	0.6 ±0.2	0.6 ±0.2	25mg
			L	5.0±0.2	2.5 ±0.2	0.55±0.10	0.65±0.25	0.6 ±0.25	
RLC63	6322	2512	- & K	6.3±0.2	3.2 ±0.15	0.6 ±0.15	0.6 ±0.2	0.6 ±0.2	40mg
			L	6.4±0.2	3.2 ±0.2	0.6 ±0.1	0.65±0.25	0.9 ±0.25	

*Values for reference

● Rating : TCR Mark = — & K

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Rated Current Range A	Rated Resistance Range	Combinations of Rated Resistance Range, Temperature Coefficient of Resistance and Tolerance on Rated Resistance			Isolation Voltage V	Category Temperature Range ℃
					Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻⁶ /℃		
RLC10	1005 (0402)	0.125	0.11~1.11	100mΩ ~ 10Ω	100mΩ~430mΩ 470mΩ~3.3Ω 3.6Ω~10Ω	F, J F, G, J F, J	0~+300 0~+200 ±100	100	-55~+155
RLC16	1608 (0603)	0.25	0.14~1.58	100mΩ ~ 10Ω	100mΩ~180mΩ 200mΩ~430mΩ 470mΩ~3.3Ω 3.6Ω~10Ω	F, G, J F, J	0~+250 0~+200 ±100		
RLC20	2012 (0805)	0.33	0.15~2.56	50mΩ ~ 10Ω	50mΩ~180mΩ 200mΩ~430mΩ 470mΩ~3.3Ω 3.6Ω~10Ω	F, G, J F, J	0~+250 0~+200 ±100	500	
RLC32	3216 (1206)	0.5	0.18~3.16						
RLC35	3225 (1210)	0.66	0.44~3.63	50mΩ ~ 3.3Ω	50mΩ~180mΩ 200mΩ~430mΩ 470mΩ~3.3Ω	F, G, J	0~+250 0~+200 ±100		
RLC50	5025 (2010)	0.75	0.47~3.87						
RLC63	6332 (2512)	1.0	0.55~4.47						

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation})/(\text{Rated Resistance})}$

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Limiting Element Voltage*1 is set up on RLC16, 20, 32, and rated current is not applied in the range of following rated of Resistance*2.

*1 RLC16=1.41V, RLC20=1.58V, RLC32=1.81V

*2 RLC16 and RLC20 : 7.5Ω < R, RLC32 : 6.2Ω < R

The Rated Current in the above range of the Rated Resistance Value is calculated as below way.

Rated Current=Limiting Element Voltage/Rated Resistance

RLC

●Rating : TCR Mark = L

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Rated Current Range A	Combinations of Rated Resistance Range, Temperature Coefficient of Resistance			Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range ℃
				Mark	Rated Resistance Range	Temperature Coefficient of Resistance 10 ⁻⁶ /℃			
RLC10	1005 (0402)	0.063	0.26~ 1.12	L	510mΩ~910mΩ 100mΩ~500mΩ 50mΩ~91mΩ	±300 ±800 ±1500	F(±1%) J(±5%)	100V	-55~+155
RLC16	1608 (0603)	0.1	0.33~ 3.16		510mΩ~910mΩ 100mΩ~500mΩ 39mΩ~91mΩ 10mΩ~36mΩ	±300 ±800 ±1200 ±2000			
RLC20	2012 (0805)	0.25	0.52~ 5.0						
RLC32	3216 (1206)	0.5	0.74~ 7.07		510mΩ~910mΩ 390mΩ~500mΩ 100mΩ~360mΩ	±200 ±300 ±600			
RLC35	3225 (1210)	0.66	0.85~ 8.12		510mΩ~910mΩ 390mΩ~500mΩ 100mΩ~360mΩ 50mΩ~91mΩ 20mΩ~47mΩ 10mΩ~18mΩ	±200 ±300 ±600 ±1000 ±1200 ±1500			
RLC50	5025 (2010)	0.75	0.90~ 8.66						
RLC63	6332 (2512)	1.0	1.04~10						

Note1. Rated Current = $\sqrt{\text{Rated Dissipation} / \text{Rated Resistance}}$

Note2. Rated Voltage = $\sqrt{\text{Rated Dissipation} \times \text{Rated Resistance}}$ (d.c. or a.c. r.m.s Voltage)

●Rated Resistance

Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code
10mΩ	R010	39mΩ	R039	90mΩ	R090	330mΩ	R330	800mΩ	R800	3.0Ω	3R00
11mΩ	R011	40mΩ	R040	91mΩ	R091	360mΩ	R360	820mΩ	R820	3.3Ω	3R30
12mΩ	R012	43mΩ	R043	100mΩ	R100	390mΩ	R390	900mΩ	R900	3.6Ω	3R60
13mΩ	R013	47mΩ	R047	110mΩ	R110	400mΩ	R400	910mΩ	R910	3.9Ω	3R90
15mΩ	R015	50mΩ	R050	120mΩ	R120	430mΩ	R430	1.0Ω	1R00	4.3Ω	4R30
16mΩ	R016	51mΩ	R051	130mΩ	R130	470mΩ	R470	1.1Ω	1R10	4.7Ω	4R70
18mΩ	R018	56mΩ	R056	150mΩ	R150	500mΩ	R500	1.2Ω	1R20	5.1Ω	5R10
20mΩ	R020	60mΩ	R060	160mΩ	R160	510mΩ	R510	1.3Ω	1R30	5.6Ω	5R60
22mΩ	R022	62mΩ	R062	180mΩ	R180	560mΩ	R560	1.5Ω	1R50	6.2Ω	6R20
24mΩ	R024	65mΩ	R065	200mΩ	R200	600mΩ	R600	1.6Ω	1R60	6.8Ω	6R80
25mΩ	R025	68mΩ	R068	220mΩ	R220	620mΩ	R620	1.8Ω	1R80	7.5Ω	7R50
27mΩ	R027	70mΩ	R070	240mΩ	R240	650mΩ	R650	2.0Ω	2R00	8.2Ω	8R20
30mΩ	R030	75mΩ	R075	250mΩ	R250	680mΩ	R680	2.2Ω	2R20	9.1Ω	9R10
33mΩ	R033	80mΩ	R080	270mΩ	R270	700mΩ	R700	2.4Ω	2R40	10Ω	100
36mΩ	R036	82mΩ	R082	300mΩ	R300	750mΩ	R750	2.7Ω	2R70		

Note3. Other nominal resistances values are also available, please contact KAMAYA for further information.

●Part Number Description

Example

Style		K		R470		F		TP	
Product Type		Rated Resistance		Temperature Coefficient of Resistance		Tolerance on Rated Resistance		* Packaging & Standard Qty. (Min.)	
Size		e.g.: R050=50m ohm R100=100m ohm 1R00=1 ohm 100=10 ohm		K		F		B Bulk (Loose Package)	
Code	Metric	Inch		—		G		TH Paper Tape(2mm pitch)	
10	1005	0402		L		J		TP Paper Tape	
16	1608	0603		±100 × 10 ⁻⁶ °C		±1%		TE Embossed Tape	
20	2012	0805		0~+200 × 10 ⁻⁶ °C		±2%		4,000pcs.	
32	3216	1206		0~+250 × 10 ⁻⁶ °C		±5%		RLC16	
35	3225	1210		0~+300 × 10 ⁻⁶ °C				RLC20	
50	5025	2010		±200 × 10 ⁻⁶ °C				RLC32	
63	6332	2512		±300 × 10 ⁻⁶ °C				RLC35	
				±600 × 10 ⁻⁶ °C				RLC50	
				±800 × 10 ⁻⁶ °C				RLC63	
				±1,000 × 10 ⁻⁶ °C					
				±1,200 × 10 ⁻⁶ °C					
				±1,500 × 10 ⁻⁶ °C					
				±2,000 × 10 ⁻⁶ °C					

*Refer to Tape and Packaging information on pages 52 and 53.

●Precaution

Resistance value changed by the soldering conditions. Please confirm the resistance value change for designing.

RCC

Halogen Free


Antimony Free

Pb Free

● Features

New lineup, 0201inch & 1206inch Size, Lower than 50mΩ.
Suitable for current sensing of small mobile devices.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

● Dimensions



Resistance value is marking on surface.
Please refer to Specification (Reference) on kamaya website.
Please contact Kamaya Sales Dept. for marking of RCC16.
RCC10 & RCC06 is no marking.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.
RCC06	0603	0201	All Resistance	0.6±0.03	0.3 ±0.03	0.23 ^{+0.03/-0.10}	0.15 ^{+0.05/-0.10}	0.15 ±0.05	0.16mg
RCC10	1005	0402	All Resistance	1.0±0.05	0.5 ±0.05	0.35 ^{+0.05/-0.10}	0.25 ^{+0.05/-0.10}	0.25 ±0.05	0.6mg
RCC16	1608	0603	20mΩ ≤ R	1.6±0.1	0.8 ^{+0.15/-0.05}	0.5±0.10	0.3 ±0.1	0.3 ±0.1	2mg
			R < 20mΩ					0.55 ±0.1	
RCC20	2012	0805	20mΩ ≤ R	2.0±0.15	1.25±0.10	0.6±0.10	0.4 ±0.2	0.4 ±0.2	5mg
			R < 20mΩ					0.6 ±0.2	
RCC32	3216	1206	All Resistance	3.1±0.2	1.6 ±0.15	0.6±0.10	0.5 ±0.25	0.5 ±0.25	9mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance 10 ⁻⁶ /°C			
RCC06	0603(0201)	0.1	1.0 ~2.23	20mΩ ~100mΩ	0~+500	J (±5%)	50	-55~+155
RCC10	1005 (0402)	0.125	1.11~2.23	25mΩ ~ 50mΩ	0~+350	F (±1%) J (±5%)	100	
				51mΩ ~100mΩ	±150			
RCC16	1608 (0603)	0.25	1.58~5.00	10mΩ ~ 30mΩ	0~+350			
				33mΩ ~ 50mΩ	0~+250			
				51mΩ ~100mΩ	±150			
RCC20	2012 (0805)	0.33	1.81~5.74	10mΩ ~ 27mΩ	0~+250		500	
				30mΩ ~ 50mΩ	±150			
				51mΩ ~100mΩ	±100			
				20mΩ ~ 33mΩ	0~+250			
RCC32	3216 (1206)	0.5	2.23~5.00	36mΩ ~100mΩ	±100			

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation})/(\text{Rated Resistance})}$

Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

● Rated Resistance

Resistance	Code	Mark
10mΩ	R010	010
15mΩ	R015	015
20mΩ	R020	020
22mΩ	R022	022
24mΩ	R024	024
25mΩ	R025	025
27mΩ	R027	027
30mΩ	R030	030
33mΩ	R033	033
36mΩ	R036	036

Resistance	Code	Mark
39mΩ	R039	039
40mΩ	R040	040
43mΩ	R043	043
47mΩ	R047	047
50mΩ	R050	050
51mΩ	R051	051
56mΩ	R056	056
60mΩ	R060	060
62mΩ	R062	062
65mΩ	R065	065

Resistance	Code	Mark
68mΩ	R068	068
70mΩ	R070	070
75mΩ	R075	075
80mΩ	R080	080
82mΩ	R082	082
90mΩ	R090	90
91mΩ	R091	091
100mΩ	R100	R10

Please contact Kamaya Sales Dept. for any other resistance values.

● Part Number Description

Example



Product Type

Size		
Code	Metric	Inch
06	0603	0201
10	1005	0402
16	1608	0603
20	2012	0805
32	3216	1206



Rated Resistance
e.g.: R050=50mΩ
R100=100mΩ



Tolerance on Rated Resistance	
F	±1%
J	±5%



* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Style
PA	Press-Pocket Paper Tape (2mm pitch)	15,000pcs.	RCC06
TH	Paper Tape (2mm pitch)	10,000pcs.	RCC10
TP	Paper Tape	5,000pcs.	RCC16 RCC20 RCC32

*Refer to Tape and Packaging information on pages 52 and 53.

● Precautions of use

- Resistive element is on bottom surface.
Please note for inspection of parts existence & nonexistence, inversion mounting by Inspection machine.
- Resistance value will be changed by soldering condition.
Please design products in consideration of this change of resistance value.

NEW TWLC


AEC-Q200

Halogen Free

Antimony Free

- **Features** Downsizing and High rated dissipation by wide termination structure.
Downsizing and space reduction.
High solderability strength and reliability by wide termination structure.
AEC-Q200 Qualified.

● Dimensions



Rated resistance value is marking with 4-digit on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
TWLC32	1632	0612	1.6±0.2	3.2±0.2	0.55±0.1	0.5±0.25	0.5±0.25	9mg
TWLC50	2550	1020	2.5±0.15	5.0±0.2	0.55±0.1	0.6±0.2	0.6±0.2	26mg
TWLC63	3263	1225	3.2±0.2	6.3±0.2	0.60±0.1	0.6±0.2	0.6±0.2	40mg

*Values for reference



● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance			
					Code 10 ⁻⁶ /°C			
TWLC32	1632 (0612)	1.0	1.04 ~ 3.16	100mΩ ~ 180mΩ	—	F (± 1%) J (± 5%)	500	-55 ~ +155
				200mΩ ~ 470mΩ				
				500mΩ ~ 910mΩ				
TWLC50	2550 (1020)	1.0	1.04 ~ 3.16	100mΩ ~ 180mΩ				
				200mΩ ~ 910mΩ				
TWLC63	3263 (1225)	2.0	1.48 ~ 4.49	100mΩ ~ 180mΩ				
				200mΩ ~ 910mΩ				

Note1. Rated Current = $\sqrt{(\text{Rated Dissipation}) / (\text{Rated Resistance})}$


Note2. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$ (d.c. or a.c. r.m.s Voltage)

● Rated Resistance

Resistance	Code	Resistance	Code	Resistance	Code	Resistance	Code
100mΩ	R100	220mΩ	R220	400mΩ	R400	650mΩ	R650
110mΩ	R110	240mΩ	R240	430mΩ	R430	680mΩ	R680
120mΩ	R120	250mΩ	R250	470mΩ	R470	700mΩ	R700
130mΩ	R130	270mΩ	R270	500mΩ	R500	750mΩ	R750
150mΩ	R150	300mΩ	R300	510mΩ	R510	800mΩ	R800
160mΩ	R160	330mΩ	R330	560mΩ	R560	820mΩ	R820
180mΩ	R180	360mΩ	R360	600mΩ	R600	900mΩ	R900
200mΩ	R200	390mΩ	R390	620mΩ	R620	910mΩ	R910

● Part Number Description

Example

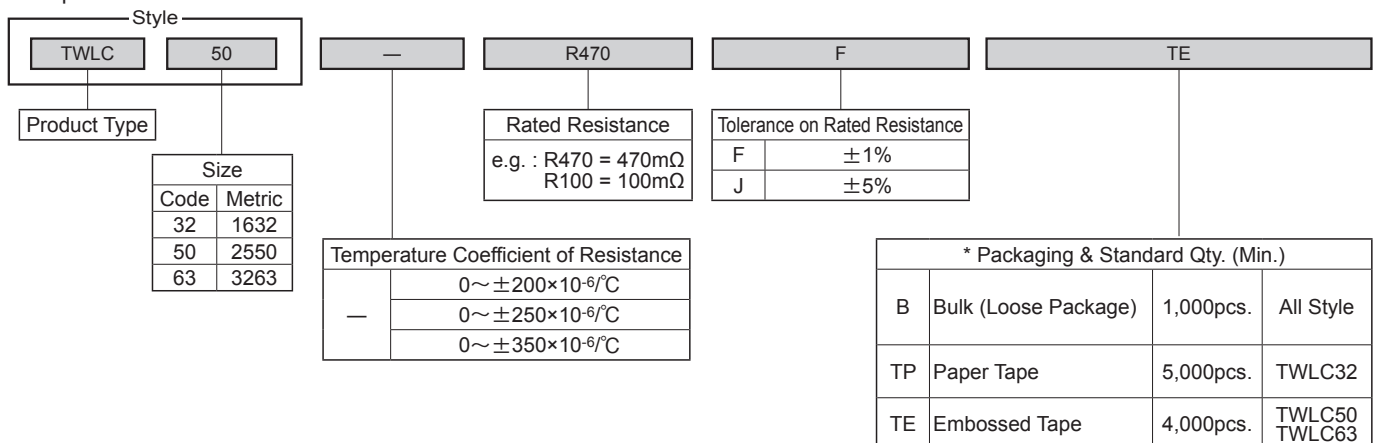

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Resistors

Sensing

KAMAYA OHM <http://www.kamaya.co.jp>

NEW
RLP

AEC-Q200

Halogen Free


Antimony Free

Pb Free

●Features

Line up of 0603, 0805, 1206 & 2512inch.
Suitable for current sensing of battery pack.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

●Dimensions



Resistance value of RLP series are marked like below.

The resistance value of RLP63 are marked with 4 characters on the overcoating.

The resistance value of RLP20 & RLP32 are marked with "2 numbers" & "-" on the overcoating.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.	Marking
RLP16	1608	0603	5mΩ	1.6±0.1	0.8 ±0.1	0.35±0.10	0.2 ±0.1	0.6 ±0.1	2mg	No Marking
			10mΩ			0.3 ±0.10		0.3 ±0.1		
RLP20	2012	0805	NEW 2mΩ	2.0±0.15	1.25±0.15	0.22±0.10	0.35±0.1	0.55±0.20	3mg	02
			NEW 3mΩ			0.45±0.10		0.75±0.20	7mg	03
			4mΩ							04
			5mΩ			0.35±0.10		0.6 ±0.20		05
			6mΩ					0.47±0.20	3mg	06
			7mΩ					0.75±0.20		07
			8mΩ			0.22±0.10		0.6 ±0.20		08
			9mΩ					0.52±0.20		09
			10mΩ					0.47±0.20		10
			1mΩ			0.32±0.15	1.1 ±0.25	1.1 ±0.25	12mg	01
RLP32	3216	1206	2mΩ	3.2±0.15	1.6 ±0.15		0.5 ±0.25	0.5 ±0.25	11mg	02
			3mΩ				0.7 ±0.25	1.3 ±0.25	11mg	03
			4mΩ				1.1 ±0.25	1.1 ±0.25	12mg	04
			5mΩ			0.35±0.10	1.0 ±0.25	1.0 ±0.25	11mg	05
			6mΩ				0.85±0.25	0.85±0.25		06
			7mΩ				0.7 ±0.25	0.7 ±0.25		07
			8mΩ				0.6 ±0.25	0.6 ±0.25	10mg	08
			9mΩ			0.3 ±0.1	0.75±0.25	0.75±0.25	9mg	09
			10mΩ							10
			NEW 11mΩ			0.28±0.10	0.5 ±0.25	0.5 ±0.25	9mg	11
			12mΩ						8mg	12
			13mΩ			0.22±0.10	0.65±0.25	0.65±0.25	7mg	13
			14mΩ				0.55±0.25	0.55±0.25	7mg	14
			15mΩ				0.5 ±0.25	0.5 ±0.25	6mg	15
RLP63	6332	2512	1mΩ	6.3±0.25	3.1 ±0.25	0.38±0.15	2.2 ±0.25	2.2 ±0.25	50mg	R001
			2mΩ				1.1 ±0.25	1.1 ±0.25	42mg	R002
			3mΩ			0.45±0.15	2.2 ±0.25	2.2 ±0.25	57mg	R003
			4mΩ			0.35±0.15			43mg	R004
			5mΩ				1.95±0.25	1.95±0.25	43mg	R005
			6mΩ				1.75±0.25	1.75±0.25	41mg	R006
			7mΩ			0.34±0.15	1.4 ±0.25	1.4 ±0.25	42mg	R007
			8mΩ			0.35±0.15	1.1 ±0.25	1.1 ±0.25	41mg	R008
			9mΩ				0.8 ±0.25	0.8 ±0.25	40mg	R009
			10mΩ				1.75±0.25	1.75±0.25	30mg	R010
			NEW 11mΩ				1.75±0.25	1.75±0.25		R011
			12mΩ			0.23±0.15	1.4 ±0.25	1.4 ±0.25	26mg	R012
			NEW 13mΩ				1.3 ±0.25	1.3 ±0.25		R013
			NEW 14mΩ				1.1 ±0.25	1.1 ±0.25		R014
			15mΩ				0.95±0.25	0.95±0.25		R015

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70℃ W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance			Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range ℃
				Rated Resistance Range	Temperature Coefficient of Resistance				
					Code	10 ⁻⁶ /℃			
RLP16	1608 (0603)	0.33	8.1, 5.7	5mΩ, 10mΩ	N	±70	F(±1%) J(±5%)	100	−55~+155
					K	±100			
RLP20	2012 (0805)	0.5	15.8, 12.9, 11.1, 10.0, 9.1, 8.4, 7.9, 7.4, 7.07	2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N	±70			
					K	±100			
RLP32	3216 (1206)	1	31.6 22.3, 18.2, 15.8, 14.1, 12.9, 11.9, 11.1, 10.5, 10, 9.5, 9.1, 8.7, 8.4, 8.1	1mΩ 2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ, 11mΩ, 12mΩ, 13mΩ, 14mΩ, 15mΩ	K	±100			
					—	±150			
					N	±70			
					K	±100			
RLP63	6332 (2512)	2	44.7	1mΩ	N	±70			
					K	±100			
					—	±150			
		1	22.3, 18.2, 15.8, 14.1, 12.9, 11.9, 11.1, 10.5, 10, 9.5, 9.1, 8.7, 8.4, 8.1	2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ, 11mΩ, 12mΩ, 13mΩ, 14mΩ, 15mΩ	N	±70			
					K	±100			

Note1. Rated Current= $\sqrt{(\text{Rated Dissipation}) / (\text{Rated Resistance})}$

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)


Note3. Please contact Kamaya Sales Dept. for any other resistance values.

Note4. Resistance value shall be measured by mounting the substrate with the required conditions per KAMAYA specification.

RLP

●Recommended land Pattern

Unit : mm



Style	Metric	Inch	Rated Resistance	A	B	X	Y
RLP16	1608	0603	5mΩ	0.6	2.2	0.9	0.9
			10mΩ	1.0			0.6
RLP20	2012	0805	2mΩ	0.5	2.7	1.36	1.1
			3mΩ				0.8
			4mΩ				
			5mΩ				
			6mΩ				
			7mΩ				
			8mΩ				
			9mΩ				
			10mΩ				
RLP32	3216	1206	1mΩ	1.0	3.9	1.7	1.45
			2mΩ	2.1			0.9
			3mΩ	0.8			1.55
			4mΩ	1.0			1.45
			5mΩ	1.4			1.25
			6mΩ				
			7mΩ	2.1			0.9
			8mΩ				
			9mΩ				
			10mΩ				
12mΩ							
13mΩ							
15mΩ							
RLP63	6332	2512	1mΩ	2.0	7.6	3.5	2.8
			2mΩ	1.8			2.9
			3mΩ				
			4mΩ				
			5mΩ	2.4			2.6
			6mΩ	4.0			1.8
			7mΩ				
			8mΩ				
			9mΩ				
			10mΩ				
			11mΩ				
			12mΩ				
			13mΩ				
			14mΩ				
			15mΩ				

*Values for reference

●Part Number Description

Example

Style			K	R005	F	TE			
RLP	63								
Product Type			Temperature Coefficient of Resistance	Rated Resistance e.g. : R001=1mΩ R010=10mΩ	Tolerance on Rated Resistance	* Packaging & Standard Qty. (Min.)			
Size									
Code	Metric	Inch							
16	1608	0603							
20	2012	0805							
32	3216	1206							
63	6332	2512							
			—	±150×10 ⁻⁶ /°C		TP	Paper Tape	5,000pcs.	RLP16 RLP20 RLP32
			K	±100×10 ⁻⁶ /°C					
			N	±70 ×10 ⁻⁶ /°C					



Chip Resistors

Sensing

KAMAYA OHM <http://www.kamaya.co.jp>

NEW
MLP

AEC-Q200

Halogen Free

Antimony Free


Pb Free

●Features

0805inch size : 1W 2512inch size: 2W.

Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

●Dimensions



Resistance value of MLP series are marked like below.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.	Marking	
MLP20	2012	0805	NEW 2mΩ	2.0±0.15	1.25±0.15	0.22±0.10	0.35±0.10	0.55±0.20	3mg	02	
			NEW 3mΩ			0.45±0.10		0.75±0.20	7mg	03	
			4mΩ			0.35±0.10		0.7 ±0.20	3mg	04	
			5mΩ					0.6 ±0.20		05	
			6mΩ					0.47±0.20		06	
			NEW 7mΩ					0.75±0.20		07	
			8mΩ			0.22±0.10		0.6 ±0.20		08	
			9mΩ					0.52±0.20		09	
			10mΩ					0.3 ±0.1		0.47±0.20	10
			MLP32			3216		1206	NEW 1mΩ	3.2±0.15	1.6 ±0.15
NEW 2mΩ	0.5 ±0.25	0.5 ±0.25		11mg	02						
NEW 3mΩ	0.35±0.10	0.7 ±0.25		1.3 ±0.25	11mg		03				
4mΩ		1.1 ±0.25		1.1 ±0.25			12mg		04		
5mΩ		1.0 ±0.25		1.0 ±0.25			05				
NEW 6mΩ		0.85±0.25		0.85±0.25			11mg		06		
NEW 7mΩ		0.7 ±0.25		0.7 ±0.25			07				
NEW 8mΩ		0.6 ±0.25		0.6 ±0.25	10mg		08				
NEW 9mΩ	0.3 ±0.1	0.75±0.25		0.75±0.25	9mg		09				
NEW 10mΩ	0.28±0.10	0.5 ±0.25		0.5 ±0.25	10						
MLP63	6332	2512	NEW 0.5mΩ	6.3±0.25	3.1 ±0.25	0.58±0.15	2.2 ±0.25	2.2 ±0.25	90mg	0L50	
			NEW 1.5mΩ			0.38±0.15	1.5 ±0.25	1.5 ±0.25	47mg	1L50	
			2mΩ			0.58±0.15	2.2 ±0.25	2.2 ±0.25	77mg	R002	
			NEW 2.5mΩ			0.45±0.15	2.4 ±0.25	2.4 ±0.25	63mg	2L50	
			3mΩ			0.34±0.15	2.2 ±0.25	2.2 ±0.25	48mg	R003	
			4mΩ						64mg	R004	
			5mΩ						55mg	R005	
			6mΩ			0.5 ±0.15	0.6 ±0.25	0.6 ±0.25	64mg	R006	
			7mΩ						43mg	R007	
			8mΩ						40mg	R008	
			9mΩ						41mg	R009	
			10mΩ			0.35±0.15	0.8 ±0.25	0.8 ±0.25	41mg	R010	

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance			
					Code 10 ⁻⁶ /°C			
MLP20	2012 (0805)	1	22.3, 18.2, 15.8, 14.1, 12.9, 11.9, 11.1, 10.5, 10	2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N ±70 K ±100	F(±1%) J(±5%)	100	-55~+155
MLP32	3216 (1206)	1.5	38.7	1mΩ	N ±70 — ±150			
			27.3, 22.3, 19.3, 17.3, 15.8, 14.6, 13.6, 12.9, 12.2	2mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N ±70 K ±100			
MLP63	6332 (2512)	2	63.2	0.5mΩ	K ±100	J(±5%)		
			36.5, 31.6, 28.2, 25.8, 22.3, 20.0, 18.2, 16.9, 15.8, 14.9, 14.1	1.5mΩ, 2mΩ, 2.5mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N ±70 K ±100	F(±1%) J(±5%)		

Note1. Rated Current= $\sqrt{(\text{Rated Dissipation}) / (\text{Rated Resistance})}$

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)


Note3. Please contact Kamaya Sales Dept. for any other resistance values.

Note4. Resistance value shall be measured by mounting the substrate with the required conditions per KAMAYA specification.

MLP

●Recommended land Pattern

Unit : mm




Style	Metric	Inch	Rated Resistance	A	B	X	Y	
MLP20	2012	0805	2mΩ	0.5	2.7	1.35	1.1	
			3mΩ					
			4mΩ					
			5mΩ	0.8			0.95	
			6mΩ					
			7mΩ					
			8mΩ					
			9mΩ					
10mΩ								
MLP32	3216	1206	1mΩ	1.0	3.9	1.7		1.45
			2mΩ	2.1				0.9
			3mΩ	0.8			1.55	
			4mΩ	1.0			1.45	
			5mΩ	1.4			1.25	
			6mΩ					
			7mΩ					
			8mΩ	2.1			0.9	
			9mΩ					
			10mΩ					
MLP63	6332	2512	0.5mΩ	1.8	7.6	3.5	2.9	
			1.5mΩ	4			1.8	
			2mΩ	1.8			2.9	
			2.5mΩ					
			3mΩ					
			4mΩ					
			5mΩ	4			1.8	
			6mΩ					
			7mΩ					
			8mΩ					
			9mΩ					
			10mΩ					

*Values for reference

●Part Number Description

Example



K

R005

F

TE

Rated Resistance
e.g. : R001=1mΩ
R010=10mΩ
0L50=0.5mΩ

Tolerance on Rated Resistance	
F	± 1%
J	± 5%

Temperature Coefficient of Resistance	
—	± 150×10 ⁻⁶ /°C
K	± 100×10 ⁻⁶ /°C
N	± 70 ×10 ⁻⁶ /°C

* Packaging & Standard Qty. (Min.)			
TP	Paper Tape	5,000pcs.	MLP32 MLP20
TE	Embossed Tape	4,000pcs.	MLP63

*Refer to Tape and Packaging information on pages 52 and 53.

●Precaution

Resistance value changed by the soldering conditions. Please confirm the resistance value change for designing.



Chip Resistors

Sensing

KAMAYA OHM <http://www.kamaya.co.jp>

NEW

MLP63C

AEC-Q200

Halogen Free


Antimony Free

Pb Free

●Features

2512inch size: 3W.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

●Dimensions



Resistance value of MLP series are marked like below.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.	Marking
MLP63C	6332	2512	0.5mΩ	6.3±0.25	3.1±0.25	0.58±0.15	2.2 ±0.25		90mg	0L50
			1mΩ			0.38±0.15			50mg	R001
			1.5mΩ			0.58±0.15	1.5 ±0.25		47mg	1L50
			2mΩ				2.2 ±0.25		77mg	R002
			2.5mΩ			0.45±0.15	2.4 ±0.25		63mg	2L50
			3mΩ			0.34±0.15	2.2 ±0.25		48mg	R004
			4mΩ						64mg	R005
			5mΩ			0.5 ±0.15	1.1 ±0.25		55mg	R006
			6mΩ				0.6 ±0.25			R007
			7mΩ			0.35±0.15	1.1 ±0.25		43mg	R008
			8mΩ				0.8 ±0.25		40mg	R009
			9mΩ				0.5 ±0.25		41mg	R010
			10mΩ							

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C	
				Rated Resistance Range	Temperature Coefficient of Resistance				
					Code				10 ⁻⁶ /°C
MLP63C	6332 (2512)	3	77.4	0.5mΩ	K	±100	J(±5%)	100	−55~+170
			54.7, 44.7, 38.7, 34.6, 31.6, 27.3, 24.4, 22.3, 20.7, 19.3, 18.2, 17.3	1mΩ, 1.5mΩ, 2mΩ, 2.5mΩ, 3mΩ, 4mΩ, 5mΩ, 6mΩ, 7mΩ, 8mΩ, 9mΩ, 10mΩ	N	±70	F(±1%)		
					K	±100	J(±5%)		


Note1. Rated Current= $\sqrt{(\text{Rated Dissipation}) / (\text{Rated Resistance})}$

Note2. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note3. Please contact Kamaya Sales Dept. for any other resistance values.

Note4. Resistance value shall be measured by mounting the substrate with the required conditions per KAMAYA specification.

●Recommended land Pattern




Unit : mm

Style	Rated Resistance Range	A	B	X	Y				
MLP63C	0.5mΩ	1.8	7.6	3.5	2.9				
	1mΩ								
	1.5mΩ				4	1.8			
	2mΩ	1.8					2.9		
	2.5mΩ								
	3mΩ								
	4mΩ	4							1.8
	5mΩ								
	6mΩ								
	7mΩ								
	8mΩ								
	9mΩ								
	10mΩ								

●Part Number Description

Example

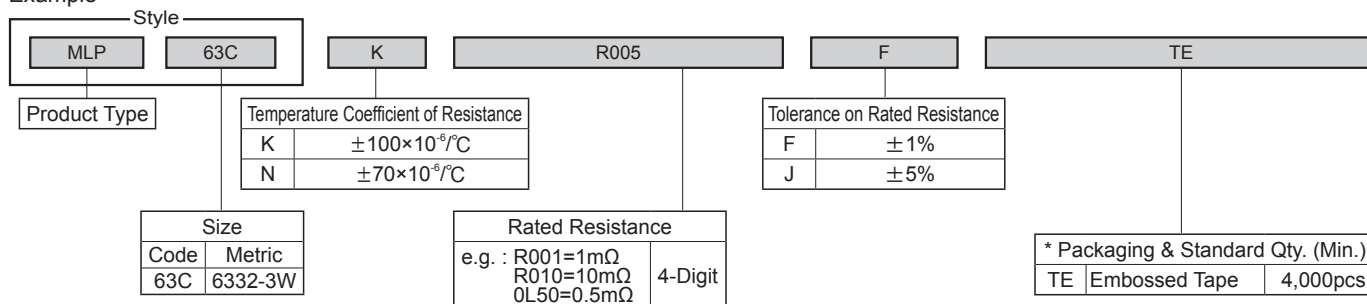

*Refer to Tape and Packaging information on pages 52 and 53.

●Precaution

Resistance value changed by the soldering conditions. Please confirm the resistance value change for designing.

WLP63

Halogen Free

Antimony Free


Pb Free

●Features

2512inch size 2W, 15mΩ, 20mΩ, 25mΩ available.

Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

●Dimensions



Resistance value of WLP series are marked like below.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	c	d	*Unit weight/pc.	Marking
WLP63	6332	2512	★ 15mΩ	6.2±0.2	3.2±0.20	0.6±0.2	0.8±0.2		62.5mg	R015
			★ 20mΩ							R020
			25mΩ							R025


*★ : Under Development

*Values for reference

●Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Current Range A	Combination of Rated Resistance Range and Temperature Coefficient of Resistance			Tolerance on Rated Resistance	Isolation Voltage V	Category Temperature Range °C
				Rated Resistance Range	Temperature Coefficient of Resistance				
					Code	10 ⁻⁶ /°C			
WLP63	6332 (2512)	2	11.5, 10.0, 8.94	15mΩ, 20mΩ, 25mΩ	N	±70	F(±1%) G(±2%) J(±5%)	100	−55~+170

●Recommended land Pattern




Unit : mm

Style	Rated Resistance Range	A	B	X	Y
WLP63	15mΩ	4.4	7.6	3.7	1.6
	20mΩ				
	25mΩ				

●Part Number Description

Example

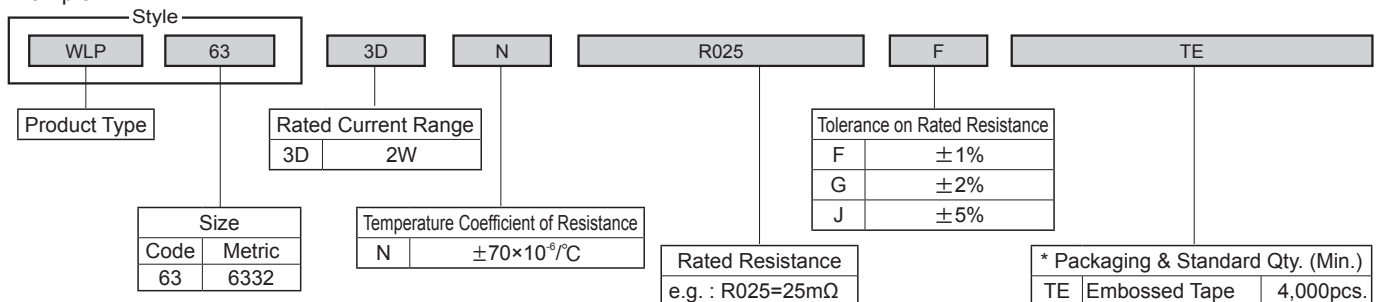

*Refer to Tape and Packaging information on pages 52 and 53.

●Precaution

Resistance value changed by the soldering conditions. Please confirm the resistance value change for designing.

★ Under Development

TWP


AEC-Q200

Halogen Free

Antimony Free

- **Features** Wide termination type Metal plate chip resistor.
Higher rated dissipation than standard termination chip resistor.
AEC-Q200 qualified.

● Dimensions

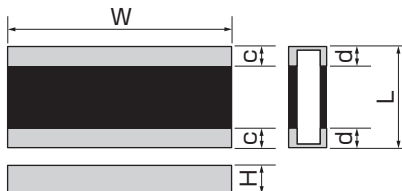

Rated resistance value is marking with 4-digit on the over coating.

Unit : mm

Style	Metric	Inch	Rated Resistance	L	W	H	*c	*d	*Unit weight/pc.	Marking
TWP63	3263	1225	1mΩ	3.2±0.25	6.3±0.5	0.2±0.15	0.5 ±0.25	0.5 ±0.25	23mg	R001
			2mΩ							R002
			3mΩ							R003
			4mΩ							R004
			5mΩ							R005
TWP110	50110	2043	1mΩ	5.0±0.25	11.0±1.0	0.2±0.15	0.55±0.25	0.55±0.25	56mg	R001
			2mΩ							R002
			3mΩ							R003
			4mΩ							R004
			5mΩ							R005

*Values for reference

● Rating


Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Rated Current Range A	Limiting Element Voltage V	Category Temperature Range °C
				Code	10 ⁻⁶ /°C				
TWP63	3263 (1225)	3	1mΩ	K	±100	F (±1%) J (±5%)	54.7	100	-55~+170
			2mΩ				38.7		
			3mΩ				31.6		
			4mΩ				27.3		
			5mΩ				24.4		
TWP110	50110 (2043)	6	1mΩ	K	±100	F (±1%) J (±5%)	77.4	100	-55~+170
			2mΩ				54.7		
			3mΩ				44.7		
			4mΩ				38.7		
			5mΩ				34.6		

Note1. Rated Current=√((Rated Dissipation) / (Rated Resistance))

Note2. Rated Voltage=√((Rated Dissipation) × (Rated Resistance)) (d.c. or a.c. r.m.s Voltage)

● Part Number Description

Example

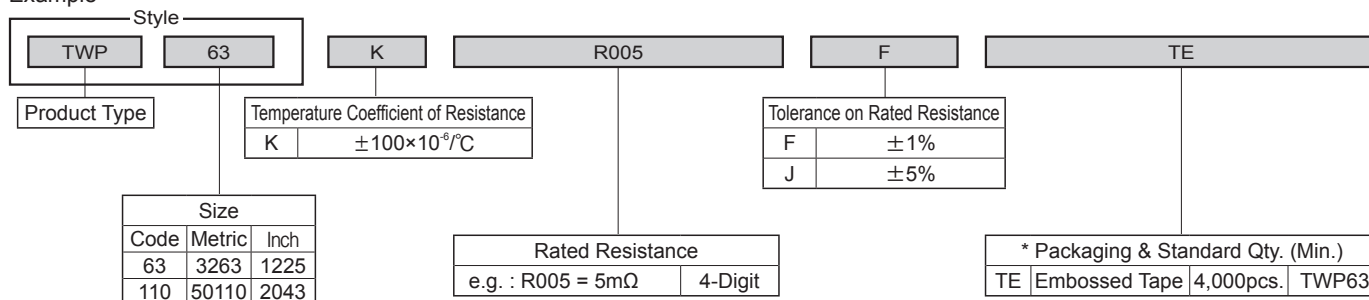

*Please contact sales department for bulk goods and the taping of TWP110.

*Refer to Tape and Packaging information on pages 52 and 53.

NEW DLP


AEC-Q200

Halogen Free

Antimony Free

- **Features** Metal foil type Low ohm chip resistor.
TCR : $\pm 100 \times 10^{-6}/^{\circ}\text{C}$
Rated dissipation 2012mm : 0.5W 3216mm : 1W.
AEC-Q200 qualified.

● Dimensions

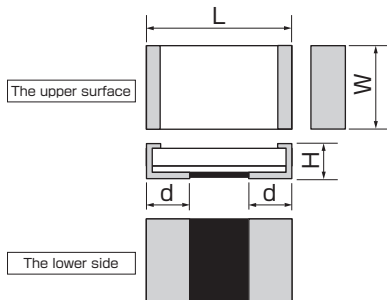

Rated resistance value is marking with 4-digit on the over coating.

Unit : mm

Style	Metric	Inch	L	W	H	d	*Unit weight/pc.
DLP20	2012	0805	2.1 \pm 0.2	1.35 \pm 0.2	0.65 \pm 0.20	0.5 \pm 0.2	23mg
DLP32	3216	1206	3.3 \pm 0.2	1.7 \pm 0.2	0.65 \pm 0.20	0.68 \pm 0.30	56mg

*Values for reference


● Rating

Style	Size Metric (Inch)	Rated Dissipation at 70°C W	Rated Resistance Range	Temperature Coefficient of Resistance		Tolerance on Rated Resistance	Category Temperature Range °C
				Code	10 ⁻⁶ /°C		
DLP20	2012 (0805)	0.5	15mΩ~50mΩ	K	±100	F(±1%)	-55~+155
DLP32	3216 (1206)	1.0	15mΩ~40mΩ				

● Rated Resistance

Resistance	Code	Resistance	Code
15mΩ	R015	35mΩ	R035
20mΩ	R020	40mΩ	R040
25mΩ	R025	45mΩ	R045
30mΩ	R030	50mΩ	R050
33mΩ	R033		

● Recommended land Pattern

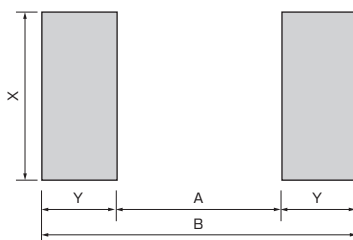

Unit : mm

Style	Metric	Inch	A	B	X	Y
DLP20	2012	0805	0.8	3.6	1.44	1.4
DLP32	3216	1206	1.2	4.8	1.84	1.8

● Part Number Description

Example

Example

Style

DLP

20

Product Type

K

Temperature Coefficient of Resistance

K

$\pm 100 \times 10^{-6} / ^\circ \text{C}$

R020

Rated Resistance

e.g. : R020 = 20m Ω

4-Digit

F

Tolerance on Rated Resistance

F

$\pm 1\%$

TP

* Packaging & Standard Qty. (Min.)

TP

Paper Tape

5,000pcs.

DLP20

TE

Embossed Tape

5,000pcs.

DLP32

Size

Code

Metric

Inch

20

2012

0805

32

3216

1206


RAC

Halogen Free


Antimony Free

- **Features** High-density SMD packaging contributes higher productivity and reduces assembly costs.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

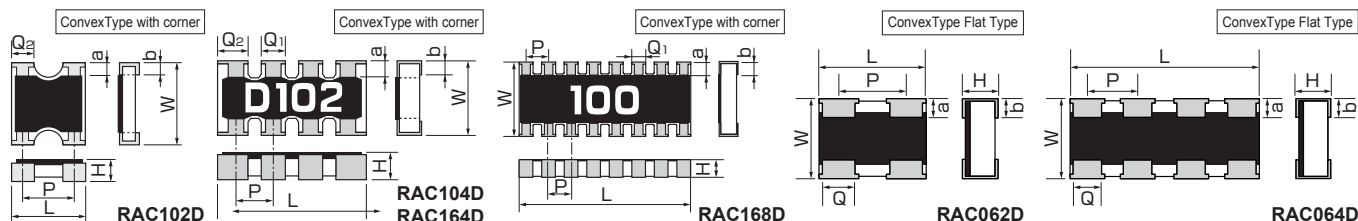

Dimensions of Terminal Style : E, please contact us.



Note. Please contact KAMAYA for the detail of marking on the over coating.

Unit : mm

Style	Terminal Style	L	W	H	Q1	*Q2	a	b	*P	*Unit weight/pc.
RAC062D	★ D	0.8±0.1	0.6±0.1	0.35±0.10	—	0.3 ±0.1	0.15±0.1	0.15±0.1	0.5	0.56mg
	E	0.8±0.05	0.6±0.05	0.23±0.10	—	0.2 ±0.1	0.2 ±0.1	0.2 ±0.1	—	0.38mg
RAC064D	★ D	1.4±0.1	0.6±0.1	0.35±0.10	—	0.25±0.1	0.15±0.1	0.2 ±0.1	0.4	0.98mg
	E	1.4±0.05	0.6±0.05	0.23±0.10	—	0.2 ±0.1	0.2 ±0.1	0.2 ±0.1	—	0.65mg
RAC102DC	C	1.0±0.1	1.0±0.1	0.35±0.10	—	0.34±0.05	0.2 ±0.15	0.25±0.17	0.65	1.1mg
RAC104DC	C	2.0±0.1	1.0±0.1	0.45±0.10	0.3 ±0.05	0.4 ±0.1	0.2 ±0.1	0.25±0.10	0.5	2.1mg
RAC164DC	C	3.2±0.1	1.6±0.1	0.5 ±0.1	0.4 ±0.1	0.6 ±0.1	0.3 ±0.1	0.3 ±0.2	0.8	7mg
RAC168DC	C	3.8±0.1	1.6±0.1	0.45±0.1	0.3 ±0.1	—	0.3 ±0.1	0.3 ±0.1	0.5	8.3mg

★ : Under Development

*Values for reference

● Ratings

Style	Rated Dissipation at 70℃		Rated Current of Jumper A	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10%/℃	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range ℃	
	W/Element	W/pc.									
RAC062D	0.031	0.063	1.0	100~100kΩ	F(±1%)	±200	12.5	E24	50	-55~+125	
				10~27Ω	J(±5%)	±350					
				30~1MΩ	J(±5%)	±200					
RAC064D		0.125		100~100kΩ	F(±1%)	±200					
10~27Ω				J(±5%)	±350						
30~1MΩ				J(±5%)	±200						
RAC102D	0.063	0.125		3~9.1Ω	J(±5%)	±400	25				
				10~1MΩ		±300					
RAC104D				10~1MΩ		±200					
	0.1	0.25		10~1MΩ	F(±1%)	±100	50		100		
RAC164D				1~9.1Ω	J(±5%)	+300~+500					
				10~1MΩ		±200					
				1.1M~10MΩ		+300~+500					
				10~1MΩ		±200					
RAC168D	0.063	0.25		10~1MΩ		±200	25				


Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

● Part Number Description

Example

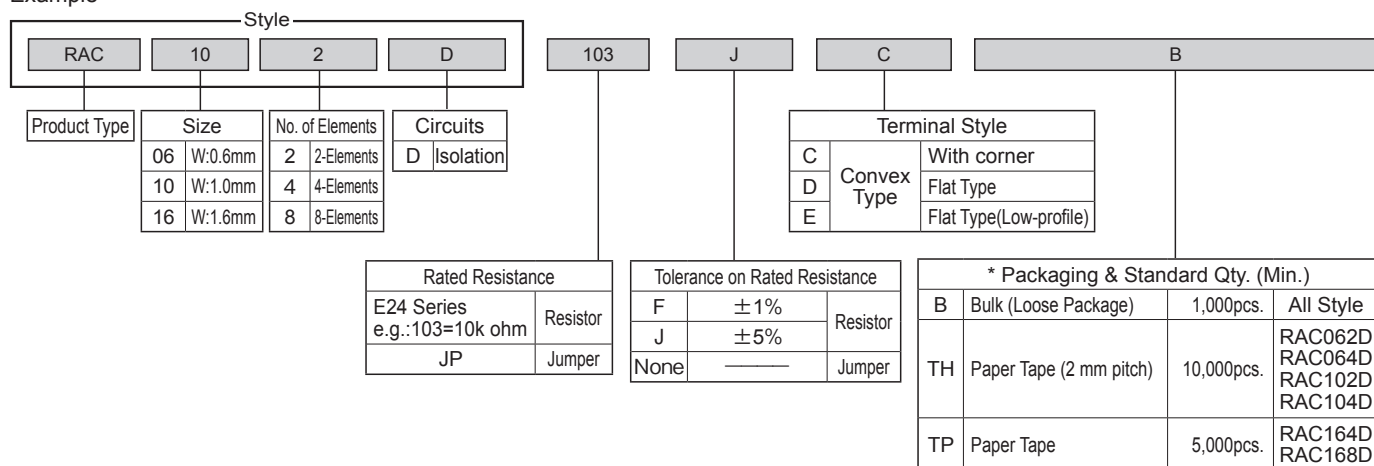

*Refer to Tape and Packaging information on pages 52 and 53.

NEW RAAW

AEC-Q200


Anti-Sulfuration

Halogen Free


Antimony Free

- **Features** Chip resistor network combined with anti-sulfuration performance.
High-density SMD packaging contributes higher productivity and reduces assembly costs.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

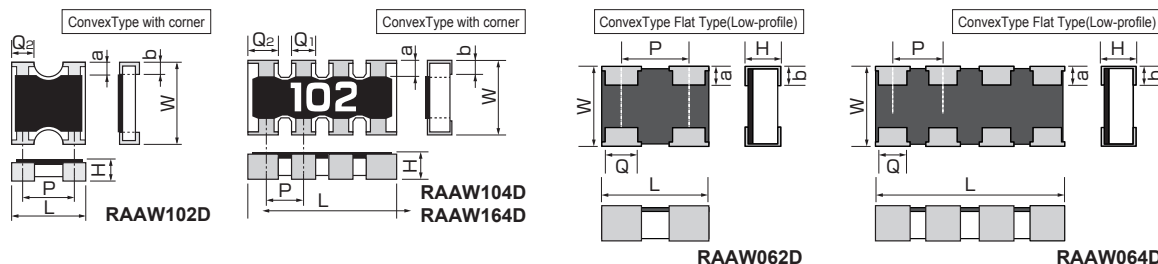

Dimensions of Terminal Style : E, please contact us.



Note. Please contact KAMAYA for the detail of marking on the over coating.

Style	Terminal Style	L	W	H	Q ₁	*Q ₂	a	b	*P	*Unit weight/pc.
NEW RAAW062D	E	0.8±0.05	0.6±0.05	0.23±0.10	—	0.2 ±0.1	0.2 ±0.1	0.2 ±0.1	0.5	0.38mg
NEW RAAW064D	E	1.4±0.05	0.6±0.05	0.23±0.10	—	0.2 ±0.1	0.2 ±0.1	0.2 ±0.1	0.4	0.65mg
★ RAAW102D	C	1.0±0.1	1.0±0.1	0.35±0.10	—	0.34±0.05	0.2 ±0.15	0.25±0.17	0.65	1.1mg
★ RAAW104D	C	2.0±0.1	1.0±0.1	0.45±0.10	0.3±0.05	0.4 ±0.1	0.2 ±0.1	0.25±0.10	0.5	2.1mg
★ RAAW164D	C	3.2±0.1	1.6±0.1	0.5 ±0.1	0.4±0.1	0.6 ±0.1	0.3 ±0.1	0.3 ±0.2	0.8	7mg

*★ : Under Development

*Values for reference

● Rating

Style	Rated Dissipation at 70°C		Rated Current of Jumper A	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻³ /°C	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
	W/Element	W/pc.								
NEW RAAW062D	0.031	0.063	1.0	100~100kΩ	F(±1%)	±200	12.5	E24	50	-55~+155
				10~27Ω	J(±5%)	±350				
				30~1MΩ		±200				
NEW RAAW064D				100~100kΩ	F(±1%)	±200				
				10~27Ω	J(±5%)	±350				
				30~1MΩ		±200				
★ RAAW102D	0.063	0.125	1.0	10~1MΩ	F(±1%) J(±5%)	±200	25		100	
★ RAAW104D		0.25					50			
★ RAAW164D	0.1	0.25								

Note1. Rated Voltage=√(Rated Dissipation) × (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)


Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

*★ : Under Development

● Part Number Description

Example

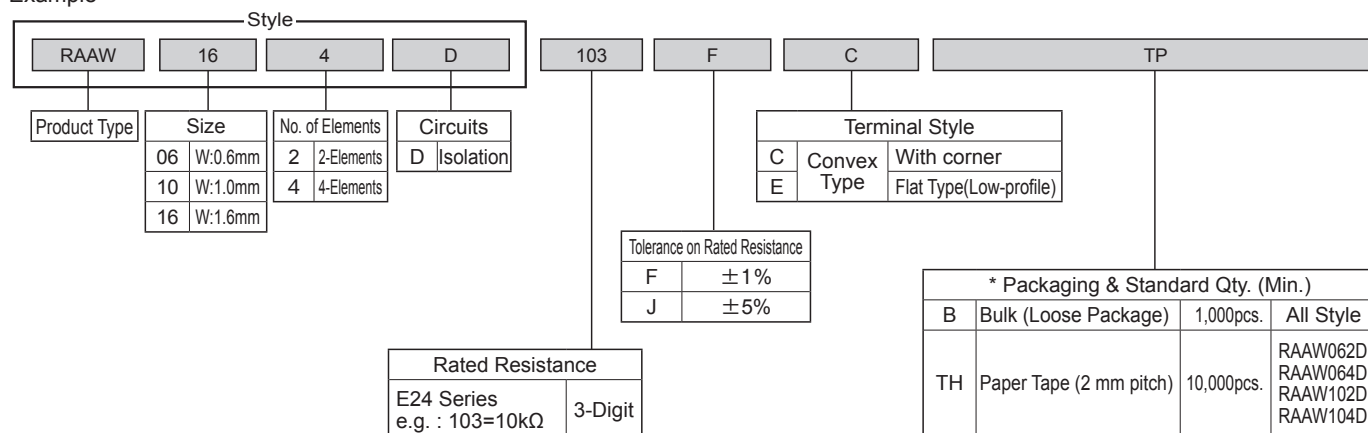

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Thermistors

Temperature Compensation

KAMAYA OHM <http://www.kamaya.co.jp>

LTC

Halogen Free


Antimony Free

Pb Free

● Features

Linearity of resistance change in wide temperature range.
Suitable for temperature compensation, temperature sensing and controlling, and circuit protection applications.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.W

● Dimensions

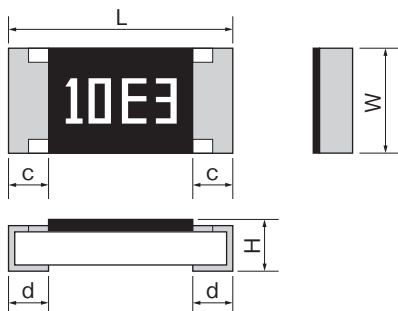

Rated resistance and T.C.R. value are marked with 4-digit on the over coating.
e.g. 10E3... 10 : $1,000 \times 10^{-6}/^{\circ}\text{C}$
E3 : 1.5k ohm

Please contact KAMAYA Sales department for further information.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
LTC1/10	2012	0805	2.0 ± 0.15	$1.25^{+0.10}_{-0.05}$	0.6 ± 0.1	0.4 ± 0.2	$0.3^{+0.2}_{-0.1}$	5mg
LTC1/8	3216	1206	3.1 ± 0.1	1.55 ± 0.10	0.6 ± 0.1	0.45 ± 0.20	$0.3^{+0.2}_{-0.1}$	9mg

Unit : mm

*Values for reference

● Ratings


Temperature Coefficient of Resistance		Resistance Temperature Coefficient Tolerance	Rated Resistance Range (Rated Dissipation at 70°C)		Tolerance on Rated Resistance	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
$10^{-6}/^{\circ}\text{C}$	Code		LTC1/10 (0.1W)	LTC1/8 (0.125W)				
500	05	$\pm 100 \times 10^{-6}/^{\circ}\text{C}$	100 ohm~5.1k ohm	100 ohm~10k ohm	J($\pm 5\%$)	E24	100	-40~+125
800	08	$\pm 150 \times 10^{-6}/^{\circ}\text{C}$	100 ohm~5.1k ohm	100 ohm~10k ohm				
1,000	10	$\pm 15\%$	100 ohm~5.1k ohm	100 ohm~10k ohm				
1,500	15		100 ohm~3.3k ohm	100 ohm~4.7k ohm				
2,000	20		100 ohm~3.3k ohm	100 ohm~4.7k ohm				
2,400	24		100 ohm~1.6k ohm	100 ohm~2.2k ohm				
2,800	28	$\pm 10\%$	100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,000	30		100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,300	33		100 ohm~3.3k ohm	100 ohm~3.6k ohm				
3,600	36		51 ohm~910 ohm	51 ohm~1.2k ohm				
3,900	39		51 ohm~560 ohm	51 ohm~910 ohm				
4,200	42		33 ohm~360 ohm	33 ohm~470 ohm				
4,500	45		33 ohm~200 ohm	33 ohm~180 ohm				

Note1. Rated Voltage= $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)

Note1. Listed above will be made by order. Please contact KAMAYA for further information.

● Part Number Description

Example

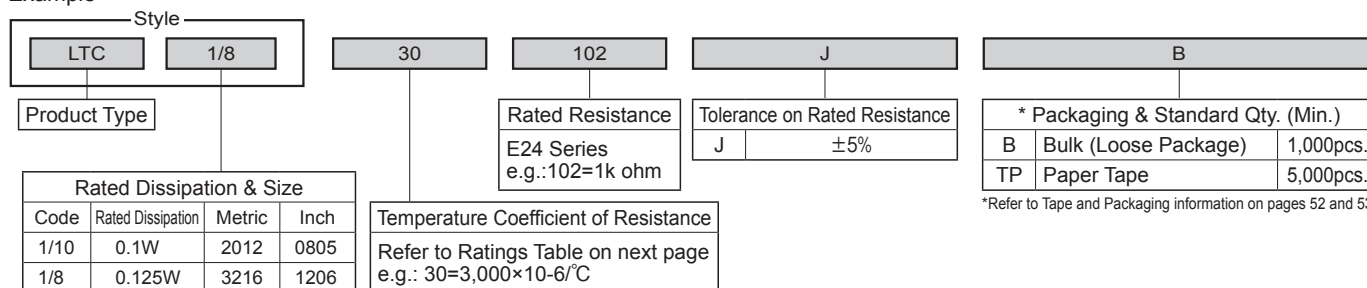

FRC


Halogen Free

Antimony Free

● Features

Suitable for battery circuit and power supply circuit.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions

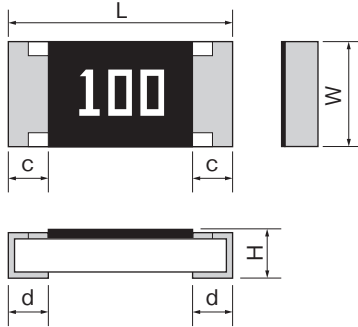

Rated resistance value is marked with 3-digit on the over coating

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FRC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.1	0.3±0.1	2.2mg
FRC20	2012	0805	2.0±0.1	1.25±0.10	0.6 ±0.1	0.4±0.2	0.4±0.2	6mg
FRC32	3216	1206	3.2±0.2	1.6 ±0.15	0.6 ±0.1	0.5±0.25	0.5±0.25	10mg

*Values for reference

● Ratings

Style	Size Metric (Inch)	Rated Dissipation W	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁻⁶ /°C	Preferred Number Series for Resistors	Fusing Characteristic		Maximum open-circuit voltage	Category Temperature Range °C
							Applied Power	Fusing Time		
FRC16	1608 (0603)	0.063	3.9Ω~51Ω	J(±5%)	±500	E24	1.89W	30s max.	50V	-55~+125
FRC20	2012 (0805)	0.1	1Ω~51Ω		±1,000		2.0W			
FRC32	3216 (1206)	0.125	1Ω~51Ω 56Ω~100Ω		±500		2.5W			

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)


Note2. Contact us for further information on other style, resistance and pre-arcing time-current characteristic than those mentioned above.

Note3. Contact us for information when inrush and surge voltage are supposed to be applied.


Note4. Maximum open circuit voltage is the value of voltage applicable to both ends of resistors, when a resistor is open condition in a circuit.
This voltage shall be corresponding to 1,000 times the rated dissipation or maximum open circuit which is the less severe.

● Part Number Description

Example

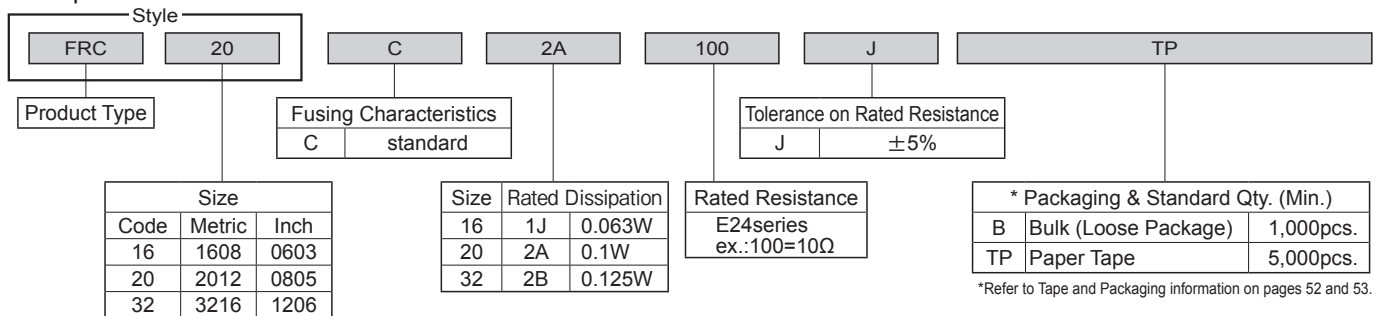

● Example of Typical Fusing Characteristics

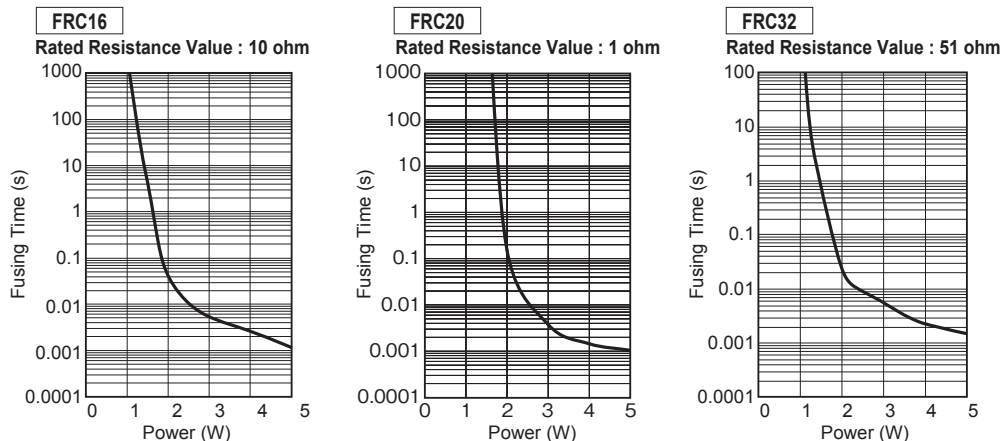



FCC,FHC

Halogen Free


Antimony Free

Pb Free

- **Features** Fast-Acting Type. Suitable for over-current protection of the circuit of miniature portable equipment.
Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
We can provide Application Guide for FCC,FHC selection.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

● Dimensions

Certified UL, c-UL. File No. : E176847

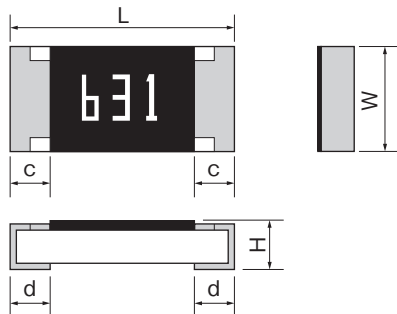

Current value is marked on the cover coating.
Please refer to Ratings table as below.

● **Ratings/Option Code : AD, AB, AA**

Unit : mm

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCC10	1005	0402	1.0±0.05	0.5 ±0.05	0.4 ±0.05	0.2±0.1	0.25±0.10	0.8mg
FHC10								
FCC16	1608	0603	1.6±0.1	0.8 ^{+0.15} / _{-0.05}	0.45±0.10	0.3±0.15	0.3 ±0.1	2mg
FHC16								
FCC20	2012	0805	2.0±0.1	1.25±0.10	0.6 ±0.1	0.4±0.2	0.4 ±0.2	6mg
FHC20								
FCC32	3216	1206	3.2±0.2	1.6 ±0.15	0.6 ±0.1	0.5±0.25	0.5 ±0.25	10mg
FHC32					0.65±0.10			11mg

*Values for reference

● Ratings/Option Code : AD (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time/Current Characteristics	Working Temperature Range ℃
Metric	Inch		Code	A					
1005	0402	FCC10	151	0.15	2,700	O	32Vd.c. 35A	Rated Current×250% Opening Time 5s max.	-55~ +125
			201	0.2	1,000	Z	30Vd.c. 35A		
			251	0.25	750	C			
			321	0.315	620	D			
			401	0.4	340	E			
			501	0.5	290	F			
			631	0.63	210	I			
			801	0.8	150	K			
			102	1.0	120	L			
			132	1.25	90	M			
		FHC10	162	1.6	55	N	24Vd.c. 35A		
			202	2.0	40	S			
			252	2.5	36	T			
			322	3.15	26	U			
1608	0603	FCC16	151	0.15	4,000	OD	50Vd.c. 35A		
			201	0.2	1,800	ZD	36Vd.c. 35A		
			251	0.25	1,000	CD			
			321	0.315	750	DD			
			401	0.4	330	ED			
			501	0.5	280	FD			
			631	0.63	200	ID			
			801	0.8	130	KD			
			102	1.0	110	LD			
			132	1.25	85	MD			
			162	1.6	70	ND			
			202	2.0	55	SD			
		FHC16	252	2.5	45	TD	32Vd.c. 35A		
			322	3.15	26	UD	24Vd.c. 35A		
2012	0805	FCC20	402	4.0	19	XD			
			401	0.4	330	401			
			501	0.5	270	501			
			631	0.63	190	631			
			801	0.8	130	801			
			102	1.0	100	102			
			132	1.25	80	132			
			162	1.6	65	162			
			202	2.0	55	202			
			252	2.5	40	252			
		FHC20	322	3.15	26	UD	32Vd.c. 50A		
			402	4.0	19	XD			
			502	5.0	14	YD	24Vd.c. 50A		
			3216	1206	FCC32	201			
251	0.25	1,000				251			
321	0.315	750				321			
401	0.4	350				401			
501	0.5	295				501			
631	0.63	200				631			
801	0.8	140				801			
102	1.0	110				102			
132	1.25	85				132			
152	1.5	78				152			
162	1.6	75				162			
202	2.0	65				202			
252	2.5	45				252			
FHC32	322	3.15			26	UD	32Vd.c. 50A		
	402	4.0	19	XD					
	502	5.0	14	YD					

FCC, FHC

● Ratings/Option Code : AB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time/Current Characteristics	Working Temperature Range ℃				
Metric	Inch		Code	A									
1005	0402	FCC10	201	0.2	2,400	Z	30Vd.c. 35A	Rated Current×200% Opening Time 5s max.	-55~ + 125				
			251	0.25	1,000	C							
			321	0.315	750	D							
			401	0.4	620	E							
			501	0.5	340	F							
			631	0.63	290	I							
			751	0.75	220	A							
			801	0.8	210	K							
			102	1.0	150	L							
			132	1.25	120	M							
			152	1.5	100	H							
			162	1.6	90	N							
		FHC10	202	2.0	55	S	24Vd.c. 35A						
			252	2.5	40	T							
			1608	0603	FCC16	201				0.2	3,200	ZB	36Vd.c. 35A
						251				0.25	1,800	CB	
321	0.315	1,000				DB							
401	0.4	750				EB							
501	0.5	330				FB							
631	0.63	280				IB							
751	0.75	210				AB							
801	0.8	200				KB							
102	1.0	130				LB							
132	1.25	110				MB							
152	1.5	95				HB							
162	1.6	85			NB								
FHC16	202	2.0			70	SB	32Vd.c. 35A						
	252	2.5			40	TB							
	2012	0805			FCC20	501				0.5	330	FB	50Vd.c. 50A
						631				0.63	270	IB	
			801	0.8		190				KB			
102			1.0	130		LB							
132			1.25	100		MB							
162			1.6	80		NB							
FHC20			202	2.0	65	SB	32Vd.c. 50A						
			252	2.5	40	TB							


● Rating/Option Code : AA (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time/Current Characteristics	Working Temperature Range °C
Metric	Inch		Code	A					
2012	0805	FCC20	501	0.5	270	501	50Vd.c. 50A	Rated Current×200% Opening Time 120s max.	-55~+125
			631	0.63	190	631			
			801	0.8	130	801			
			102	1.0	100	102			
			132	1.25	80	132			
			162	1.6	65	162			
			202	2.0	55	202			
			252	2.5	40	252			

● Recommended Derating for Rated Current

- Nominal Derating
Option Code AD: Nominal Derating ≤ 80% of Rated Current
Option Code AB: Nominal Derating ≤ 70% of Rated Current
- Temperature Derating
Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If FCC16 102AB (Rated Current:1.0A) is used under ambient temperature 70°C,
Kamaya recommends, less than the current value derated as below,
Rated Current : 1.0A × (Nominal Derating : 70% × Temperature Derating : 100%) = 0.7A

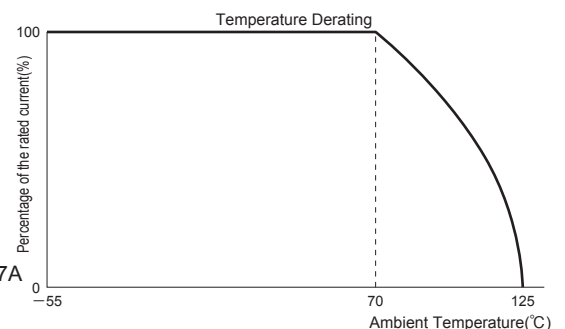

● Part Number Description

Example

Style		202		AD		TP						
Product Type		Size		Rated Current		Option Code		* Packaging & Standard Qty. (Min.)				
FCC		Code	Metric	Inch	e.g. : 501=0.5A 132=1.25A 202=2.0A	3-Digit	Code	Clearing Time	B	Bulk (Loose Package)	1,000pcs.	All Style
FHC		10	1005	0402			AD	Within 5s under 250% of Rated Current	PA	Press-Pocket Paper Tape (2mm pitch)	10,000pcs.	FCC10 FHC10
		16	1608	0603			AB	Within 5s under 200% of Rated Current	TP	Paper Tape	5,000pcs.	FCC16 FHC16 FCC20 FHC20 FCC32 FHC32
		20	2012	0805			AA	Within 120s under 200% of Rated Current				
		32	3216	1206								



FMC

Option Code : WB, AB / Low Ohm & Fast Acting
Option Code : WH, AH / In-rush Withstand

Halogen Free

Antimony Free

Pb Free


● Features

Option code : AB, WB / Low internal resistance compared with FCC/FHC16 AB series for low power consumption and voltage dropping.
 Option code : AH, WH / High anti pulse performance.
 New line up, 1005mm size, High inrush performance, Option code: WH.
 Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
 We can provide Application Guide for FMC16 selection.
 Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
 AEC-Q200 qualified.

Certified UL, c-UL. File No. : E176847



● Dimensions

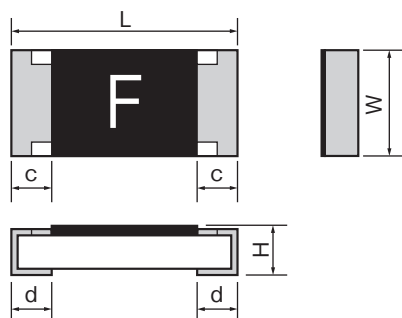

Current value is marked on the cover coating.
 Please refer to Ratings table as below.

Unit : mm

Style	Option Code	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FMC10	NEW WH AB	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05 0.38±0.05	0.2±0.1	0.25±0.10	0.6mg
FMC16	All	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.45±0.10	0.3±0.15	0.3 ±0.1	2mg

*Values for reference

● Ratings/Option Code : WB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range °C
Metric	Inch		Code	A				Rated Current	Opening time	
1608	0603	FMC16	501	0.5	260	F	32Vd.c. 35A	× 100% × 200% × 300%	4h Min. 5s Max. 0.2s Max.	-55~ +125
			751	0.75	140	A				
			102	1.0	110	L				
			132	1.25	80	M				
			152	1.5	65	H				
			202	2.0	45	S				
			252	2.5	32	T				
			302	3.0	26	R				
			402	4.0	18	X				
			502	5.0	14	Y				

● Ratings/Option Code : WH (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range °C
Metric	Inch		Code	A				Rated Current	Opening time	
1005	0402	FMC10	501	0.5	250	F	24Vd.c. 35A	× 100% × 200% × 300%	4h Min. 5s Max. 0.2s Max.	-55~ +125
			751	0.75	150	A				
			102	1.0	100	L				
			132	1.25	70	M				
			152	1.5	60	H				
			202	2.0	40	S				
			252	2.5	30	T				
			302	3.0	25	R				
			NEW 322	3.15	24	U				
			NEW 402	4.0	18	X				
1608	0603	FMC16	NEW 502	5.0	14	Y	32Vd.c. 35A	× 100% × 200% × 300%	4h Min. 5s Max. 0.2s Max.	-55~ +125
			501	0.5	400	○F				
			631	0.63	300	○I				
			751	0.75	210	○A				
			801	0.8	180	○K				
			102	1.0	115	○L				
			132	1.25	90	○M				
			152	1.5	70	○H				
			162	1.6	60	○N				
			202	2.0	50	○S				
			252	2.5	37	○T				
			302	3.0	28	○R				
			322	3.15	26	○U				
			402	4.0	18	○X				
			502	5.0	14	○Y				

FMC

Option Code : WB, AB / Low Ohm & Fast Acting
Option Code : WH, AH / In-rush Withstand

●Ratings/Option Code : AB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range ℃								
Metric	Inch		Code	A														
1005	0402	FMC10	501	0.5	240	F	24Vd.c. 35A		<table><tr><td>Rated Current</td><td>Opening time</td></tr><tr><td>× 100%</td><td>4h Min.</td></tr><tr><td>× 200%</td><td>5s Max.</td></tr><tr><td>× 300%</td><td>0.2s Max.</td></tr></table>	Rated Current	Opening time	× 100%	4h Min.	× 200%	5s Max.	× 300%	0.2s Max.	-55~ + 125
			Rated Current	Opening time														
			× 100%	4h Min.														
			× 200%	5s Max.														
			× 300%	0.2s Max.														
			751	0.75	140	A												
			102	1.0	95	L												
132	1.25	73	M															
152	1.5	60	H															
202	2.0	41	S															
252	2.5	32	T															
302	3.0	25	R															
1608	0603	FMC16	501	0.5	260	F	32Vd.c. 35A											
			751	0.75	140	A												
			102	1.0	110	L												
			132	1.25	80	M												
			152	1.5	65	H												
			202	2.0	45	S												
			252	2.5	32	T												
			302	3.0	26	R												
			402	4.0	18	X												
			502	5.0	14	Y												

●Ratings/Option Code : AH (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics		Working Temperature Range °C								
Metric	Inch		Code	A														
1608	0603	FMC16	501	0.5	400	HF	32Vd.c. 35A		<table><tr><td>Rated Current</td><td>Opening time</td></tr><tr><td>× 100%</td><td>4h Min.</td></tr><tr><td>× 200%</td><td>5s Max.</td></tr><tr><td>× 300%</td><td>0.2s Max.</td></tr></table>	Rated Current	Opening time	× 100%	4h Min.	× 200%	5s Max.	× 300%	0.2s Max.	-55~+125
			Rated Current	Opening time														
			× 100%	4h Min.														
			× 200%	5s Max.														
			× 300%	0.2s Max.														
			631	0.63	300	HI												
			751	0.75	210	HA												
			801	0.8	180	HK												
			102	1.0	115	HL												
			132	1.25	90	HM												
			152	1.5	70	HH												
			162	1.6	60	HN												
			202	2.0	50	HS												
252	2.5	37	HT															
302	3.0	28	HR															
322	3.15	26	HU															
402	4.0	18	HX															
502	5.0	14	HY															

●Recommended Derating for Rated Current

• Nominal Derating

Nominal Derating ≤ 75% of Rated Current

For only FMC10 WH series, please note that the recommendation value is different by Rated current.

Rated Current ≤ 3.0A : 75%, Rated Current > 3.0A : 70%


• Temperature Derating

Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If FMC16 102AB (Rated Current 1.0A) is used under ambient temperature 70°C,


Kamaya recommends, less than the current value derated as below,

Rated Current : 1.0A × (Nominal Derating : 75% × Temperature Derating : 80%) = 0.6A

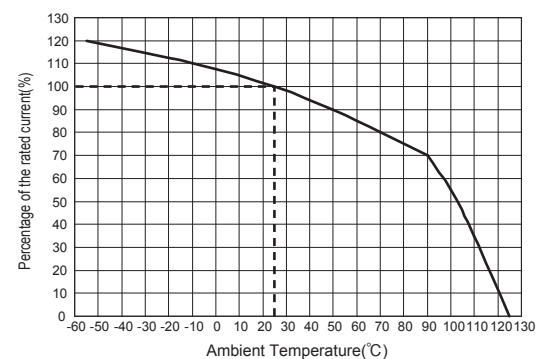

●Part Number Description

Example

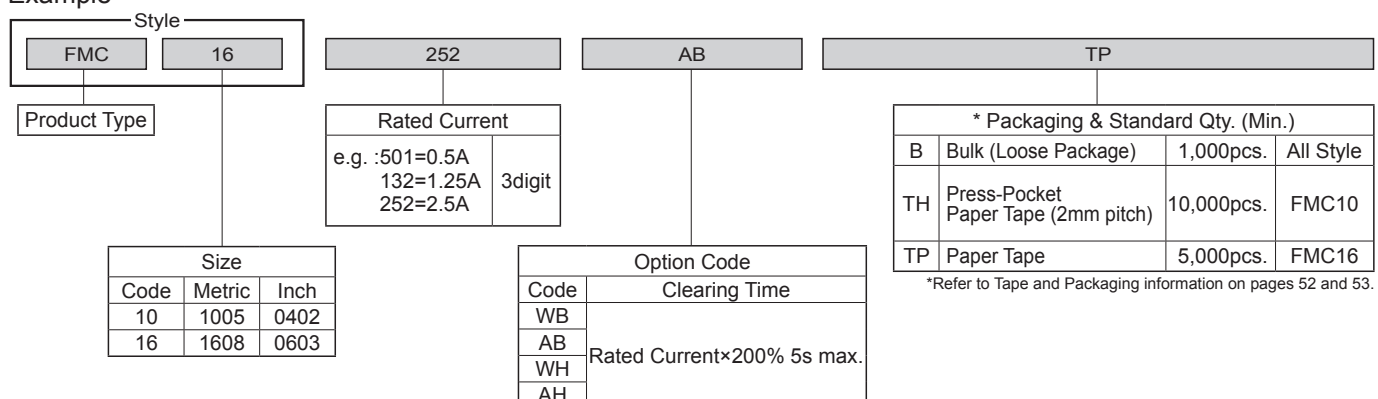



FCCR

Halogen Free

Antimony Free

Pb Free


● Features

Suitable for over-current protection of the circuit of miniature portable equipment.
Low internal resistance compared with FCC10AB series for low power consumption and voltage dropping.
e.g.) FCCR10 201AB : 1100m Ω Typ
FCCR10 201AB(In-line product) : 1850m Ω Typ
FCCR16 401AB : 358m Ω Typ
FCCR16 401AB(In-line product) : 590m Ω Typ
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

Certified UL, c-UL File No. : E176847



● Dimensions







Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
FCCR10	1005	0402	1.0±0.05	0.5±0.05	0.4±0.05	0.2±0.1	0.25±0.10	0.8mg
FCCR16	1608	0603	1.6±0.1	0.8 ^{+0.15/-0.05}	0.45±0.10	0.3±0.15	0.3±0.1	2mg

*Values for reference

● Ratings/Option Code : AB (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Time / Current Characteristics	Working Temperature Range ℃
Metric	Inch		Code	A					
1005	0402	FCCR10	151	0.15	1850	∩	24Vd.c. 35A	Rated Current × 200% Opening time : 5s Max.	－55～＋125
			201	0.2	1250	Z			
			251	0.25	880	C			
			321	0.315	600	D			
			401	0.4	400	E			
			501	0.5	300	F			
1608	0603	FCCR16	 151	0.15	2300	OB	50Vd.c. 50A		
			 201	0.2	1350	ZB			
			 251	0.25	1000	CB			
			 321	0.315	600	DB			
			401	0.4	450	EB			
			501	0.5	300	FB			
			631	0.63	220	IB			
			751	0.75	190	AB			
			801	0.8	165	KB			
			102	1.0	130	LB			
			132	1.25	110	MB			
			152	1.5	90	HB			
			162	1.6	75	NB			
			202	2.0	65	SB			
			252	2.5	40	TB			

● Recommended Derating for Rated Current


• Nominal Derating

Nominal Derating ≤ 75% of Rated Current

• Temperature Derating

Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If FCCR10 501AB (Rated Current:0.5A) is used under ambient temperature 70°C,
Kamaya recommends, less than the current value derated as below,
Rated Current : 0.5A × (Nominal Derating : 75% × Temperature Derating : 100%) = 0.375A

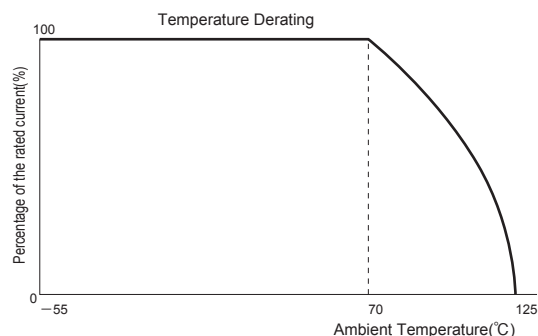

● Part Number Description

Example

Style		151		AB		PA	
FCCR	10	Rated Current		Option Code		* Packaging & Standard Qty. (Min.)	
Product Type		e.g. :151=0.15A 321=0.315A 132=1.25A		Code		B Bulk (Loose Package)	
Size		3digit		Clearing Time		1,000pcs.	
Code	Metric	Inch	AB Within 5s under 200% of Rated Current		PA Press-Pocket Paper Tape (2mm pitch)		All Style
10	1005	0402			10,000pcs.		FCCR10
16	1608	0603			5,000pcs.		FCCR16
						TP Paper Tape	

*Refer to Tape and Packaging information on pages 44 and 45.

SBF32 Slow Blow

Halogen Free

Antimony Free


Pb Free

- **Features** "Slow Blow" ensure high anti pulse performance. Line up of 8A.
Please contact Kamaya Sales Dept, if you need to confirm Inrush current endurance, Anti-pulse performance etc.
We can provide Application Guide for SBF32 selection.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.
AEC-Q200 qualified.

Certified UL, c-UL. File No. : E176847



● Dimensions



Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
SBF32	3216	1206	3.2±0.2	1.6±0.15	0.65±0.10	0.5±0.25	0.5±0.25	10mg

Unit : mm

*Values for reference


● Option Code:AS(Slow Blow type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics			Working Temperature Range ℃
Metric	Inch		Code	A				Rated Current	Opening time		
3216	1206	SBF32	102	1.0	130	S10	63Vd.c. 50A	× 100%	Opening time		-55~+ 125
			132	1.25	94	S13			Min.	Max.	
			152	1.5	68	S15					
			202	2.0	40	S20					
			252	2.5	30	S25					
			302	3.0	24	S30					
			402	4.0	15	S40					
			502	5.0	12	S50					
			602	6.0	10	S60					
			702	7.0	7	S70					
			802	8.0	6	S80	× 300%	0.02s	120s		
										× 800%	

● Recommended Derating for Rated Current

- Nominal Derating
Nominal Derating ≤ 75% of Rated Current
- Temperature Derating
Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If SBF32 102AS (Rated Current 1.0A) is used under ambient temperature 70°C,
Kamaya recommends, less than the current value derated as below.
Rated Current : 1.0A × (Nominal Derating : 75% × Temperature Derating : 80%) = 0.6A

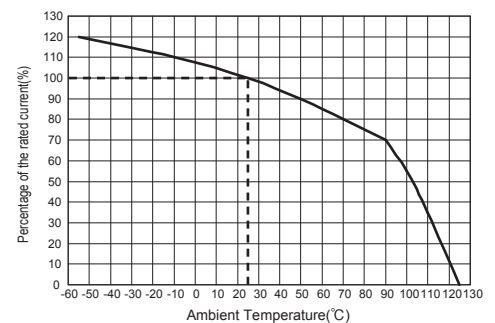

● Part Number Description

Example

Style		402		AS		TP	
SBF	32						
Product Type		Rated Current		Option Code		Packaging & Standard Qty. (Min.)	
Size		e.g. : 252=2.5A 402=4.0A 802=8.0A		Code		B Bulk (Loose Package)	
Code	Metric	Inch	3digit	Clearing Time		1,000pcs.	
32	3216	1206		AS Rated Current×200% : 1s min~120s. max.		TP Paper Tape	
						5,000pcs.	

*Refer to Tape and Packaging information on pages 52 and 53.



HFC32 High Rated Voltage

Halogen Free

Antimony Free

Pb Free


●Features

Line up of Low-profile Chip Fuse with high rated voltage 76Vd.c.
Withstanding for rated current until Max. 12.5A
For Chip Fuse selection, application guide is available. Please contact Kamaya sales dept. if it is required.
For more details on this product, check the specification on Kamaya website.
AEC-Q200 qualified.

Certified UL, c-UL. File No. : E176847



●Dimensions



Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
HFC32	3216	1206	3.2±0.2	1.6±0.15	0.60±0.1	0.5±0.25	0.5±0.25	9mg

*Values for reference


●Rating/Option Code : AG (Fast-Acting type)

Size		Style	Rated Current		Internal Resistance m ohm max.	Mark	Interrupting Rating	Electrical Characteristics	Working Temperature Range °C
Metric	Inch		Code	A					
3216	1206	HFC32	NEW 102	1.0	180	102	76Vd.c. 50A	Rated Current × 200% Opening time : 60s Max.	-55~+125
			NEW 132	1.25	140	132			
			NEW 162	1.6	100	162			
			NEW 202	2.0	60	202			
			252	2.5	38	252			
			302	3.0	32	302			
			322	3.15	30	322			
			402	4.0	20	402			
			502	5.0	16	502			
			632	6.3	12	632			
			702	7.0	11	702			
			802	8.0	9	802			
			103	10.0	7	103			
			133	12.5	6	133			

●Recommended Derating for Rated Current


- Nominal Derating
Nominal Derating ≤ 75% of Rated Current
- Temperature Derating
Please refer to the following graph regarding the current derating value for ambient temperature.

Ex.) If HFC32 252 AG (Rated Current 2.5A) is used under ambient temperature 70°C ,
Kamaya recommends, less than the current value derated as below,
Rated Current : 2.5Ax (Nominal Derating : 75%×Temperature Derating : 80%) = 1.5A

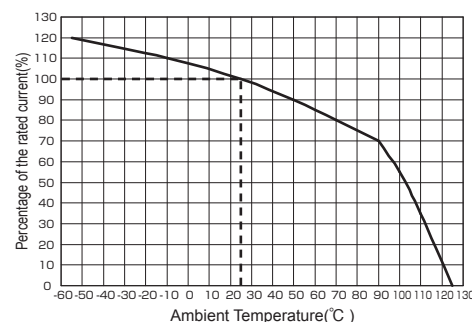

●Part Number Description

Example

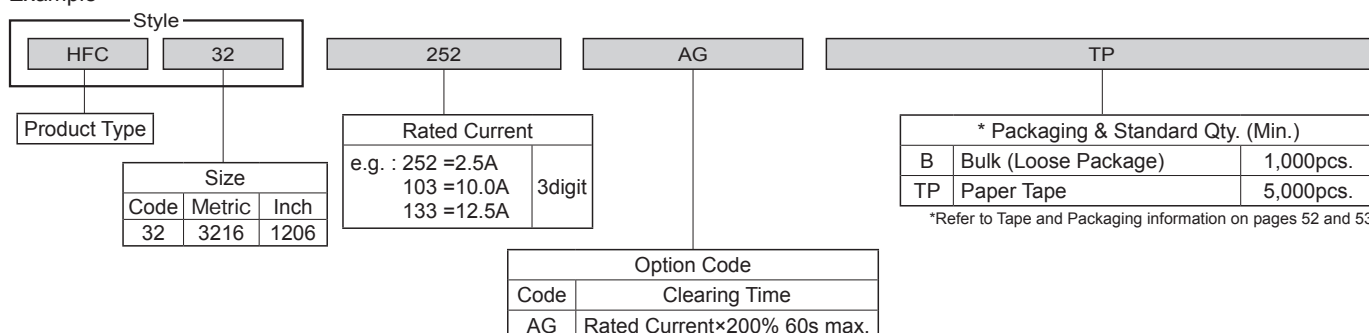

NEW

PFC60 Ceramic Case Type

Halogen Free

Antimony Free

Pb Free

●Features


Available until high rated voltage 125Va.c./d.c.
Protect the primary circuit of power supply by excellent interrupting characteristics.
Major application: PC peripherals, Motor circuit, Battery pack, Lighting.

Safety standards : Electrical Appliance and Material Safety Law PSE class:B



●Dimensions

Certified UL, c-UL. File No.: E176847

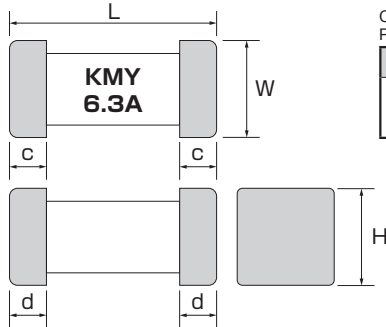










Current value is marked on the cover coating.
Please refer to Ratings table as below.

Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
PFC60	6126	2410	6.1±0.2	2.65±0.20	2.55±0.20	1.4±0.2	1.4±0.2	130mg

Unit : mm

*Values for reference

●Rating

Size		Style	Option Code	Rated Current		Internal Resistance m ohm max.	Mark	Safety standard & Electrical Characteristics & Interrupting Rating				Working Temperature Range ℃				
Metric	Inch			Code	A											
6126	2410	PFC60	AP	 321	0.315	605	KMY 0.315A	Standard UL & c-UL	Fusing Characteristics		Interrupting Rating		-55~+125			
				 381	0.375	520	KMY 0.375A		× 100%	4h Min.	125Va.c./d.c.	50A				
				 401	0.4	465	KMY 0.4A									
				 501	0.5	390	KMY 0.5A									
				 631	0.63	315	KMY 0.63A									
				 701	0.7	265	KMY 0.7A									
				 801	0.8	235	KMY 0.8A									
				102	1	100	KMY 1A	Standard UL & c-UL	× 100%	4h Min.	125Va.c./d.c.	50A				
				132	1.25	78	KMY 1.25A									
				152	1.5	65	KMY 1.5A									
				162	1.6	60	KMY 1.6A									
				202	2	48	KMY 2A		× 200%	5s Max.	125Va.c./d.c.	50A				
				252	2.5	36	KMY 2.5A									
				302	3	30	KMY 3A									
				322	3.15	28	KMY 3.15A									
				402	4	22	KMY 4A	PSE	× 130%	4h Min.	100Va.c.	100A				
				502	5	16	KMY 5A									
				632	6.3	13	KMY 6.3A									
				702	7	10.6	KMY 7A									
				802	8	9.5	KMY 8A									
				103	10	7.5	KMY 10A									
						AG	 123	12	5	KMY 12A	Standard	Fusing Characteristics		Interrupting Rating		
							 153	15	4.5	KMY 15A	UL & c-UL	× 200%		60s Max.	76Va.c./d.c.	50A

●Part Number Description

Example

Style		102		AP		B	
PFC	60						
Product Type		Rated Current		Option Code		* Packaging & Standard Qty. (Min.)	
PFC		e.g. : 102 =1.0A 322 =3.15A 103 =10.0A		Code		B Bulk (Loose Package)	
		3digit		Clearing Time		TE Embossed Tape	
				AP Rated Current×200% 5s max.		1,000pcs.	
				AG Rated Current×200% 60s max.			

*Refer to Tape and Packaging information on pages 52 and 53.



Chip Attenuators

High Frequency

KAMAYA OHM <http://www.kamaya.co.jp>

RAC101A



Halogen Free

Antimony Free

● Features

Suitable for use at DC and up to UHF band frequencies.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

● Dimensions



Style	Terminal Style	L	W	H	Q	a	b	P	*Unit weight/pc.
RAC101A	C	1.0±0.1	1.0 ^{+0.10} ₀	0.35±0.1	0.33±0.10	0.15±0.10	0.25±0.10	0.65±0.10	1.1mg

Unit : mm

*Values for reference

Dot mark on Termination 1
Attenuation factor on Termination 2 to 3

● Ratings


Style	Characteristic Impedance	Attenuation Factor		Tolerance on Attenuation Factor dB	Voltage Standing Wave Ratio	Frequency Range	Rated Input Power mW/package	Category Temperature Range ℃
		symbol	dB					
RAC101A	50 ohm	1	1	±0.3	1.2max.	DC≤f≤3GHz	100	－40～+125
		2	2					
		3	3					
		4	4					
		5	5					
		6	6	±0.4				
		7	7					
		8	8					
		9	9					
		A	10					

Note. The following information is available.

1. Test methods for Attenuation Factor and VSWR characteristics.

● Part Number Description

Example

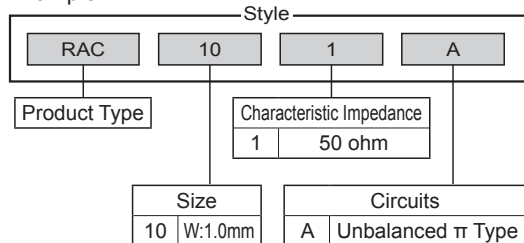

1	
Attenuation Factor	
1	1dB
2	2dB
3	3dB
4	4dB
5	5dB
6	6dB
7	7dB
8	8dB
9	9dB
A	10dB

C	
Terminal Style	
C	Convex Type With corner

TH		
* Packaging & Standard Qty. (Min.)		
B	Bulk (Loose Package)	1,000pcs.
TH	Paper Tape (2 mm pitch)	10,000pcs.

*Refer to Tape and Packaging information on pages 52 and 53.

SPC, HSPC

Halogen Free

Antimony Free

Pb Free

●Features

ESD protection component.

SPC Series : Low capacitance 0.1pF Max. Suitable for ESD protection of High Speed data line.

Major application : Mobile Phone, Digital Still Camera, PC, LCD TV etc.

HSPC Series : High ESD protection performance (15kV) for automotive (Tight ESD spec requirement)

New Line up 1005mm size.


Major application : Car audio, Car Navigation, System etc.

Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

AEC-Q200 qualified.(SPC06 is not qualified)


●Dimensions

Unit : mm

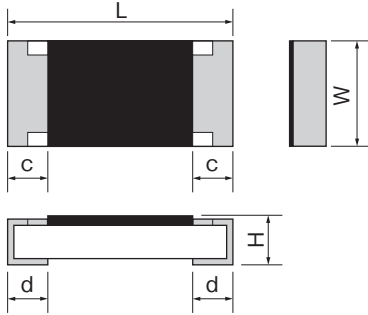


Style	Metric	Inch	L	W	H	c	d	*Unit weight/pc.
NEW SPC06	0603	0201	0.6±0.03	0.3±0.03	0.23±0.03	0.15±0.10	0.15±0.10	0.16mg
SPC10	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.2±0.1	0.25±0.10	0.6mg
HSPC10								
HSPC16	1608	0603	1.6±0.1	0.8 ^{+0.15} _{-0.05}	0.5±0.10	0.3±0.1	0.3±0.1	2mg

*Values for reference



●Ratings

Part Number	Size Metric (Inch)	Capacitance ^{Note.1} pF	Test Voltage V	ESD Characteristics			Rated voltage ^{Note.4} V	Leakage current ^{Note.5} μA	Category Temperature Range ^{Note.6} °C	
				Peak Voltage ^{Note.2} Code	Clamp Voltage ^{Note.3} V	ESD pulse withstand Pulses				
 SPC06	0603 (0201)	0.1 Max.	8kV Contact discharge	501	500 Max.	100 Max.	50 Min.	30 Max.	1 Max.	−55~+125
SPC10	1005 (0402)		15kV Aerial discharge	601	600 Max.		100 Min.	50 Max.		
HSPC10		701		700 Max.	30 Max.					
HSPC16	1608 (0603)	0.2 Max.					20 Max.	50 Max.		

Note1. Capacitance : Measured at 25°C, 1MHz, 1V rms.

Note2. Peak Voltage : Measured at IEC61000-4-2 15kV Air Discharge.

Note3. Clamp Voltage : Measured at IEC61000-4-2 15kV Air Discharge, at 30ns.

Note4. Rated Voltage : The value of voltage that is applicable to each terminal of ESD suppressor without operation of suppressor.

Note5. Leakage Current : The value of current that ESD suppressor is impressed at rated voltage.

Note6. Category Temperature Range : Working Temperature Range of ESD suppressor.

●Part Number Description

Example


Style		501	A	01	TH
Product Type	SPC	Peak Voltage	Code	Option Code	Code
	HSPC				
Size	Code	Peak Voltage	Rated Voltage	Option Code	Option Code
	Metric				
Code	06	500V	30V max.	01	Capacitance 0.1pF max.
	10				
Code	16	600V	20V max.	02	Capacitance 0.2pF max.
	06				
Code	06	700V	50V max.	01	Capacitance 0.1pF max.
	10				
Code	16	700V	50V max.	02	Capacitance 0.2pF max.
	06				

* Packaging & Standard Qty. (Min.)			
B	Bulk (Loose Package)	1,000pcs.	All Style
PA	Press-Pocket Paper Tape (2mm pitch)	15,000pcs.	SPC06
TH	Paper Tape (2mm pitch)	10,000pcs.	SPC10 HSPC10
TP	Paper Tape	5,000pcs.	HSPC16

*Refer to Tape and Packaging information on pages 52 and 53.

Packaging for Surface Mount Devices

● Reel Dimensions


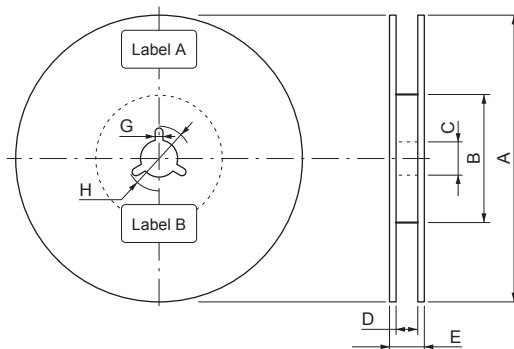


Unit : mm

	Code		A	B	C	D	E	G	H
Plastic Reel (EIAJ ET-7200B)	PA, TH, TP, TE (8 mm width)	Shoot molding	$\phi 180 \begin{smallmatrix} 0 \\ -1.5 \end{smallmatrix}$	$\phi 60 \begin{smallmatrix} +1 \\ 0 \end{smallmatrix}$	$\phi 13 \pm 0.2$	$9 \begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	11.4 ± 1.0	2 ± 0.5	$\phi 21 \pm 0.8$
		Vacuum molding					13.0 ± 1.0		
	TE (12 mm width)					$13 \begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	17.0 ± 1.0	—	

*Dimension A : Please contact KAMAYA for plastic reels of $\phi 250$ mm and $\phi 330$ mm.

● Tape Dimensions (Unit : mm)

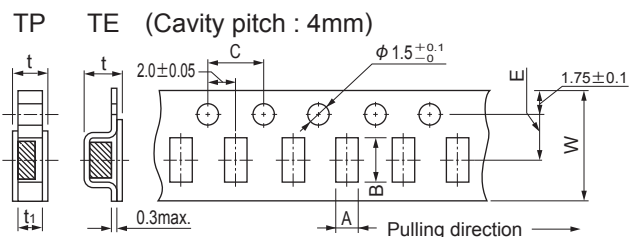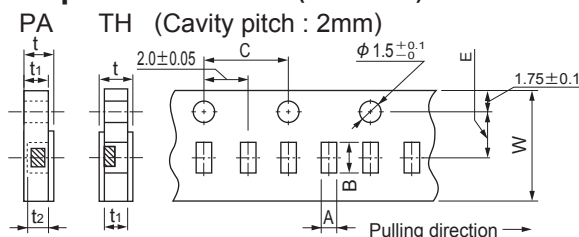

*Please contact Kamaya sales department for 1mm pitch cavity taping.

Metric	Inch	Style	Code	A	B	C	W	E	t ₁	t ₂	t		
0402	01005	RMC1/32, RGC1/32, RMP C04	PA	0.24±0.03	0.45±0.03	4.0±0.05	8.0 ±0.2	3.5±0.05	0.31±0.03	0.15±0.02	0.36±0.03		
0603	0201	RMC1/20, RGC1/20, RCC06, RNC06, RMAW06, SPC06, RMP C06		0.37±0.05	0.67±0.05	4.0±0.05			0.42±0.03	0.27±0.02	0.45±0.05		
1005	0402	FCC10, FHC10, FCCR10		TH	0.65±0.10	1.15±0.10			4.0±0.1	0.6 ±0.05	0.5 ±0.05	0.7 max.	
		RMC1/16S, RGC1/16S, RLC10, RCC10, FMC10, SPC10, HSPC10, RMGW10, RMP C10, RMSW10	0.65 ^{+0.05} _{-0.10}		1.15 ^{+0.05} _{-0.10}	0.4 ±0.05	—	0.5 max.					
1608	0603	RMC1/16	TP	1.15±0.15	1.9 ±0.2	4.0±0.1	8.0 ±0.2	3.5±0.05	0.6 ±0.1	—	0.8 max.		
		RMC1/16, RGC1/16, FCR1/16, RVC16, RLC16,RHC16, RCC16, RLP16, FCC16, FHC16, FMC16, FRC16, HSPC16, FCCR16, RBX16, RMP C16, RMCH16, RMGW16, RMSW16, RPCH16, RPGW16, RPC16		1.15±0.15	1.9 ±0.2				0.6 ±0.1	—	0.8 max.		
2012	0805	RMC1/10, RGC1/10, FCR1/10, RNC20, RVC20, RPC20, RLC20, RHC20, LTC1/10, FCC20, FHC20, FRC20, RCC20, RMGW20, RBX20, RMP C20, RMCH20, RMSW20, RPCH20, RPGW20	TP	1.65±0.15	2.5 ±0.2	4.0±0.1	8.0 ±0.2	3.5±0.05	0.8 ±0.1	—	1.0 max.		
		RLP20, MLP20		1.68±0.15	2.38±0.15				0.6 ±0.1			—	0.8±0.2
3216	1206	RMC1/8, RGC1/8, FCR1/8, RNC32, RVC32, RPC32, RLC32, LTC1/8, FCC32, FHC32, SBF32, FRC32, RCC32, HFC32, RMGW32, TWMC32, TWLC32, RBX32, RMP C32, RMCH32, RMSW32, RPCH32, RPGW32, RVAC32	TE	2.0 ±0.15	3.6 ±0.2	4.0±0.1	8.0 ±0.3	3.5±0.05	0.8 ±0.1	—	1.0 max.		
		RLP32, MLP32		2.05±0.20	3.65±0.20				0.6 ±0.1			—	—
3225	1210	RMC1/4, FCR1/4, RPC35, RLC35, RMGW35, RBX35, RMP C35, RMCH35, RMSW35, RPCH35, RPGW35	TE	2.85±0.20	3.5 ±0.2	4.0±0.1	8.0 ±0.3	3.5±0.05	—	—	1.0±0.2		
5025	2010	RMC1/2, FCR1/2, RVC50, RPC50, RZC50, RLC50, TWLC50, RMGW50, RBX50, RMCH50, RMSW50, TWMC50		3.1 ±0.2	5.5 ±0.2				—	—	1.1±0.15		
6126	2410	PFC60		2.75±0.20	6.45±0.10				12 ±0.3	5.5±0.05	—	—	2.8±0.1
6332	2512	RMC1, FCR1, RVC63, RPC63, RZC63, RLC63, RLP63, RLP63C, MLP63, TWMC63, TWLC63, TWP63, RBX63, RMCH63, RMSW63, RMGW63	TH	3.6 ±0.2	6.9 ±0.2	4.0±0.1	8.0 ±0.2	3.5±0.05	—	—	1.1±0.15		
Chip Networks Chip Attenuators		RAC062D, RAAW062D	PA	0.7 ±0.1	0.9 ±0.1				8.0 ±0.2	3.5±0.05	0.43±0.05	—	0.5±0.1
		RAC064D, RAAW064D		1.5 ±0.1									
		RAC101A	TH	1.15 ^{+0.05} _{-0.10}	1.15 ^{+0.05} _{-0.10}	0.4 ^{+0.05} _{-0.10}	—	0.55 max.					
		RAC102D, RAAW102D		1.2 ±0.1	2.2 ±0.1	0.4 ±0.1	—	0.5 max.					
		RAC104D, RAAW104D		1.9 ±0.15	3.6 ±0.2	8.0 +0.3	0.6 ±0.1	—					
		RAC164D, RAAW164D	TP	1.9 ±0.15	3.6 ±0.2		0.6 ±0.1	—					
RAC168D	1.9 ±0.15	4.1 ±0.15											

PACKAGING FOR SURFACE MOUNT DEVICES

● Tape Dimensions

Metric	Inch	Style	Code	A	B	C	W	E	t ₁	t ₂	t
1005	0402	RMNW10, RMAW10	TH	0.7 ±0.1	1.2 ±0.1	4.0±0.1	8.0±0.3	3.5±0.2	—	—	0.4 ±0.05
1608	0603	RMNW16, RMAW16	TP	1.1 ±0.2	1.9 ±0.2				—	—	0.65±0.05
2012	0805	RMNW20, RMAW20		1.65±0.20	2.4 ±0.2				—	—	1.0 Max.
3216	1206	RMNW32, RMAW32		2.0 ±0.2	3.6 ±0.2				—	—	1.0 Max.
3225	1210	RMNW35		3.0 ±0.2	3.6 ±0.2				—	—	1.0 Max.
5025	2010	RMNW50	TE	2.8 ±0.2	5.5 ±0.2	12 ±0.3	5.5±0.1	5.5±0.05	—	—	1.2 Max.
6332	2512	RMNW63		3.6 ±0.2	6.9 ±0.2				—	—	1.2 Max.
		WLP63		3.5 ±0.2	6.75±0.20				—	—	1.2 Max.

Unit : mm
*Value for reference

● Standard Packaging Quantities (Minimum Units)

Metric	Inch	Style	Tape & Reel					Bulk
			Code	M. P. Q. (pcs./reel)	Outer Carton			Q'ty (pcs.)
Reel Q'ty (pcs.)	Gross Weight (kg)	Measurement (m³)						
0402	01005	RMC1/32, RGC1/32, RMPC04	PA	20,000	50	8.8	0.027	1,000
0603	0201	RMC1/20, RGC1/20, RCC06, RNC06, RMAW06, SPC06, RMPC06		15,000		7.8		
1005	0402	FCC10, FHC10, FCCR10		10,000		6.0		
		RMC1/16S, RGC1/16S, RLC10, RCC10, FMC10, SPC10, HSPC10, RMGW10, RMPC10, RMSW10	TH			8.3		1,000
		RMNW10, RMAW10				7.2		5,000
1608	0603	RMC1/16				5,000		8.4
		RMC1/16, RGC1/16, FCR1/16, RVC16, RLC16, RHC16, RCC16, RLP16, FCC16, FHC16, FMC16, FCCR16, FRC16, HSPC16, RBX16, RPC16, RMGW16, RMPC16, RMCH16, RMSW16, RPCH16, RPGW16, RPC16	8.8					5,000
		RMNW16, RMAW16	10.0					1,000
2012	0805	RMC1/10, RGC1/10, FCR1/10, RLP20, RNC20, RVC20, RPC20, RLC20, RHC20, LTC1/10, FCC20, FHC20, FRC20, RCC20,MLP20, RMGW20, RBX20, RMPC20, RMCH20, RMSW20, RPCH20, RPGW20	TP	5,000		—		—
		RMNW20, RMAW20				—		—
		DLP20				—		—
3216 1632	1206 0612	RMC1/8, RGC1/8, FCR1/8, RNC32, RVC32, RPC32, RLC32, LTC1/8, FCC32, FHC32, SBF32, FRC32, RCC32, HFC32, RMGW32, TWMC32, TWLC32, RBX32, RMPC32, RMCH32, RMSW32, RPCH32, RPGW32, RVAC32	TE	4,000		8.8		1,000
		RMNW32, RMAW32				10.0		5,000
		RLP32, MLP32, FCC32, FHC32, SBF32, HFC32				—		1,000
		DLP32				—		—
3225	1210	RMNW35	TP		7.7	5,000		
		RMC1/4, FCR1/4, RPC35, RLC35, RMGW35, RBX35, RMPC35, RMCH35, RMSW35, RPCH35, RPGW35	TE			4,000	1,000	
5025 2550	2010 1020	RMC1/2, FCR1/2, RVC50, RPC50, RZC50, RLC50, TWLC50, TWMC50, RMGW50, RBX50, RMCH50, RMSW50		40	8.0	4,000		
		RMNW50				4,000		
6332 3263	2512 1225	RMC1, FCR1, RVC63, RPC63, RZC63, RLC63, TWMC63, TWLC63, TWP63, RBX63, RMCH63, RMSW63, RMGW63	TE	4,000	40	10.4	1,000	
		RMNW63				12.0	4,000	
		RLP63, RLP63C, MLP63, WLP63				TH	10,000	50
RAC062D, RAC064D, RAAW062D, RAAW064D	6.3							
RAC102D, RAC101A, RAAW102D	7.7							
RAC104D, RAAW104D	8.6	5,000						
Chip Networks Chip Attenuators		RAC164D, RAAW164D	TP	5,000		8.6	5,000	
		RAC168D						

Note1. Please contact Kamaya sales dept. about bulk package of RLP, MLP, MLP63C, WLP.

Note2. Please contact Kamaya sales dept. for the specification of outer carton for tape and reel code: PA, TH, TP, TE. (8mm width)

Note3. Please contact Kamaya sales dept. for information of bulk packing of RLP, MLP, MLP63C and WLP.

Note4. Please contact Kamaya sales dept. for taping and reel packing of DLP.

Leaded Resistors

Pulse

KAMAYA OHM <http://www.kamaya.co.jp>


RC1/2U

- **Features** UL recognized component(UL1676) (File No.E151897).Reduce UL or CSA approval and maintenance cost.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

UL recognized component (UL1676) (File No.E151897)



● Dimensions

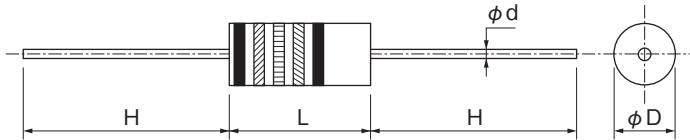

Unit : mm

Style	L	D	H	d	*Unit weight/pc.
RC1/2U	9.5 ^{+0.8} _{-0.7}	3.6±0.2	28±3	0.7 ^{+0.07} _{-0.05}	422mg

*Value for reference

● Ratings


Style	Rated Dissipation at 70°C W	Rated Voltage V	Rated Resistance Range	Tolerance on Rated Resistance and Perferred Number Series for Resistors.	Specified Line Voltage	Isolation Voltage V	Category Temperature Range °C
RC1/2U	0.5	350	1M ohm~10M ohm	K(±10%) E12	250Va.c. max. or 125Va.c. max.	500	-55~+125
				M(±20%) E6			

Note1. Required characteristic performance is based on JIS C 6406 and UL 1676.


Note2. The name of this, product is granted as Conductive Path, but UL1676 and the requirements as Discharge Path shown in CSA22, 2 No,1-94 are satisfied, but the products performance does not cover all the requirements as Conductive Path.

● Part Number Description

Example

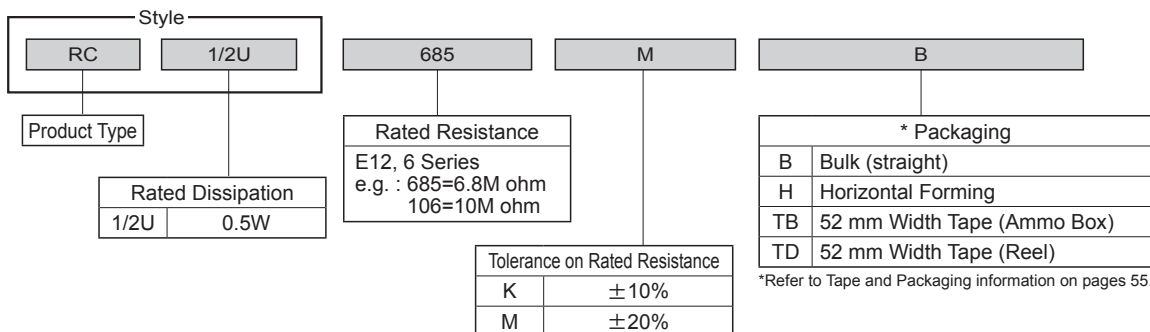


● Color Coding

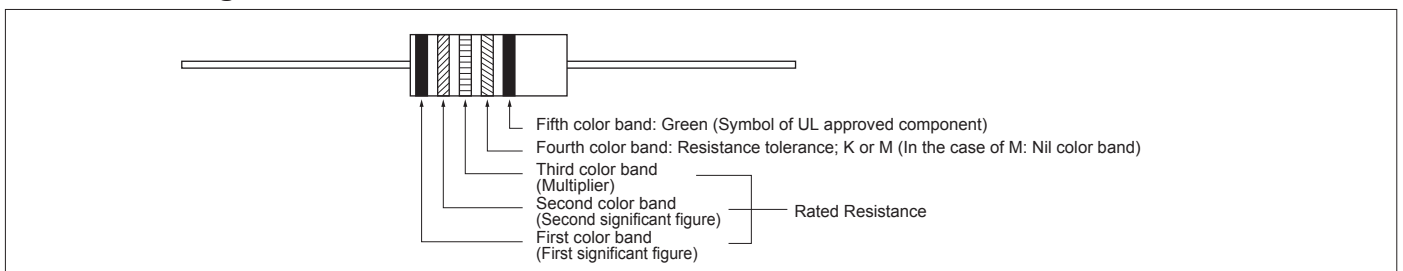

RC

- **Features** Improved pulse endurance characteristics compared to carbon-film devices.
Please refer to Specification (Reference) at the Website to confirm the specification for more detail.

- **Dimensions**

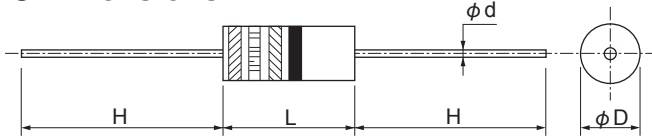

Unit : mm

Style	L	D	H	d	*Unit weight/pc.
RC1/4	6.3±0.7	2.4±0.1	30±3	0.6±0.05	222mg
RC1/2	9.5 ^{+0.8} _{-0.7}	3.6±0.2	28±3	0.7 ^{+0.07} _{-0.05}	422mg

*Values for reference

- **Ratings**

Style	Rated Dissipation at 70°C W	Limiting Element Voltage V	Rated Resistance Range	Combination of Rated Resistance Range and Temperature Coefficient of Resistance		Tolerance on Rated Resistance and Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
				Temperature Coefficient of Resistance % at -55°C	at +125°C			
RC1/4	0.25	250	1 ohm~5.6M ohm	+6.5~0	+1~ -5	1 ohm~ 1k ohm	100	-55~+125
				+10 ~0	0~ -6	1.1kohm~ 10k ohm		
				+13 ~0	0~ -7.5	11 kohm~100k ohm		
RC1/2	0.5	350	1 ohm~22M ohm	+15 ~0	0~-10	110 kohm~ 1M ohm	500	
				+20 ~0	0~-15	1.1Mohm~ 22M ohm		

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
 Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.
 Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

- **Part Number Description**

Example

Style									
RC	1/4	102	J	B					
Product Type		Rated Dissipation		Rated Resistance		Tolerance on Rated Resistance		*Packaging	
		1/4 0.25W		E24, 12, 6 Series e.g. : 2R2=2.2 ohm 102=1k ohm		J ±5%		B Bulk (Straight)	
		1/2 0.5W				K ±10%		H Horizontal Forming	
						M ±20%		TB 52 mm Width Tape (Ammo Box)	
								TD 52 mm Width Tape (Reel)	

*Refer to Tape and Packaging information on pages 55.

- **Storage** Temperature 20±15°C, Humidity 60%R.H. Max, Recommendation Storing Term 6 months after shipped from factory.

Packaging for Leaded Resistors

- **Tape**

Unit : mm

Style	W	L1-L2	T	t	P	Z	S
RC1/4 RC1/2 RC1/2U	52.4 ^{+1.6} _{-1.4}	1.0max.	6.0±0.5	0.5max.	5.08±0.38	1.0max.	3.2min.

- **Ammo Box**

Unit : mm

Style	Code	a	b	c
RC1/4	TB 52mm Width Tape	60±5	75±5	275±5
RC1/2 RC1/2U		65±5		455±5

- **Tape & Reel (Code : TD)**

Unit : mm

Style	Code	A	A'	B	C1	C2	d	*Y
RC1/4 RC1/2 RC1/2U	TD	260±5	280	75±5	60.4±1	78±1	14.5±0.5	3

*Value for reference

- **Horizontal Forming (Code : H)**

Unit : mm

Style	Code	A	B	t
RC1/4	H60	10.0±0.5	5.0±0.5	1.5max.
RC1/4	H62	12.5±0.5		
RC1/2 RC1/2U	H	15.0±0.5		1.8max.


Style	Tape & Reel					Ammo Box					Bulk Packaging				
	Q'ty / Reel (pcs.)	Reel Size (mm)	Outer Carton			Width of Taping (mm)	Q'ty / Box (pcs.)	Outer Carton			M.P.Q. (Q'ty / Plastic Bag pcs.)	Q'ty / Inner Carton (pcs.)	Outer Carton		
			Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m³)			Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m³)			Q'ty / Carton (pcs.)	Gross Weight (kg)	Measurement (m³)
RC1/2U	3,000	260	24,000	13	0.04	52	2,000	30,000	16	0.05	500 (100×5)	5,000	30,000	13	0.04
RC1/2	3,000	260	24,000	13	0.04	52	2,000	30,000	16	0.05	500 (100×5)	5,000	30,000	13	0.04
RC1/4	5,000	260	40,000	12	0.04	52	2,000	30,000	10	0.03	1000 (200×5)	10,000	50,000	13	0.04



Multilayer Ceramic Capacitor

Please see Catalog of Walsin Technology Corporation. (Website: <http://www.passivecomponent.com/>) for detail information.

- **Features** General purpose, Board of PC etc.
Full support by Japanese Quality Assurance team.




● Characteristic

Series	Dielectric	Size (inch)	Capacitance	Rated Voltage
General Purpose (6.3V ~ 100V)	NP0	0201, 0402, 0603, 0805, 1206, 1210, 1812, 1825, 2220, 2225	0.1pF ~ 0.1μF	10V, 16V, 25V, 50V, 100V
	X7R	0201, 0402, 0603, 0805, 1206, 1210, 1812, 1825, 2220, 2225	100pF ~ 47μF	6.3V, 10V, 16V, 25V, 50V, 100V
	X5R	0402, 0603, 0805, 1206, 1210	0.027μF ~ 220μF	6.3V, 10V, 16V, 25V, 50V
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.01μF ~ 100μF	6.3V, 10V, 16V, 25V, 50V, 100V
Middle & High Voltage Caps (200~3KV)	NP0	0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0.5pF ~ 0.01μF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV
	X7R	0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	100pF ~ 1μF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV
	X5R	0805, 1206, 1210, 1812	0.01μF ~ 0.68μF	200V, 250V
High Q & Low ESR Caps (HH Series)	NP0	0201, 0402, 0603, 0805	0.3pF ~ 3300pF	16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V
Microwave Caps (RF Series)	NP0	01R5, 0201, 0402, 0603, 0805, 0505, 1111	0.1pF ~ 100pF	6.3V, 10V, 25V, 50V, 100V, 500V
Soft Termination Caps SG = with Cu Polymer SH = with Ag Polymer	NP0	0402, 0603, 0805, 1206, 1210, 1808, 1812	0.5pF ~ 0.039μF	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1kV, 3kV
	X7R	0402, 0603, 0805, 1206, 1210, 1808, 1812	100pF ~ 22μF	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1kV, 2kV, 3kV
Safety Certificated Caps X1/Y2 (S2 series)	NP0	1808, 1812, 2211	4pF ~ 680pF	250Vac
	X7R	1808, 1812, 2220, 2211	100pF ~ 4700pF	250Vac
Safety Certificated Caps X2/Y3 (S3 series)	NP0	1808, 1812	3.9pF ~ 1000pF	250Vac
	X7R	1808, 1812	150pF ~ 5600pF	250Vac
Capacitor Arrays (Y4C2/Y4C3 Series)	NP0	0508 (4x0402), 0612 (4x0603)	10pF ~ 470pF	25V, 50V, 100V
	X7R	0508 (4x0402), 0612 (4x0603)	180pF ~ 0.1μF	10V, 16V, 25V, 50V
	Y5V	0612 (4x0603)	0.01μF ~ 0.1μF	16V, 50V
Automotive Caps without AEC-Q200 (MG Series)	NP0	0402, 0603, 0805, 1206, 1210, 1812	0.5pF ~ 0.033μF	10V, 16V, 25V, 50V, 100V, 200V, 250V
	X7R	0402, 0603, 0805, 1206, 1210, 1812	100pF ~ 2.2μF	10V, 16V, 25V, 50V, 100V, 200V, 250V
	X5R	0402, 0603, 0805, 1206, 1210	0.056μF ~ 10μF	6.3V, 10V, 16V, 25V
Automotive Caps qualified with AEC-Q200 (MT Series)	NP0	0402, 0603, 0805, 1206, 1210	0.5pF ~ 0.01μF	10V, 16V, 25V, 50V, 100V, 250V, 500V, 630V
	X7R	0402, 0603, 0805, 1206	100pF ~ 1μF	10V, 16V, 25V, 50V, 100V

●Dimensions

Single Chip



Unit : mm

Size Inch (Metric)	L	W	T/Symbol	Soldering Method*	MB
01R5 (0402)	0.4±0.02	0.2±0.02	0.2±0.02	V	0.10±0.03
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03	L	0.15±0.05
	0.6±0.05 ^{#2}	0.3±0.05 ^{#2}	0.3±0.05 ^{#2}		0.15±0.1/-0.05
	0.6±0.09 ^{#3}	0.3±0.09 ^{#3}	0.3±0.09 ^{#3}		
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	0.25±0.05/-0.10
	1.00±0.20	0.50±0.20	0.50±0.02/-0.05	Q	
			0.5±0.20	E	
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S	0.40±0.15
	1.60±0.15/-0.10	0.80±0.15/-0.10	0.50±0.10	H	
	1.60±0.20 ^{#1}	0.80±0.20 ^{#1}	0.80±0.15/-0.10	X	
0805 (2012)	2.00±0.15	1.25±0.10	0.50±0.10	H	0.50±0.20
			0.60±0.10	A	
			0.80±0.10	B	
			1.25±0.10	D	
	2.00±0.20	1.25±0.20	0.85±0.10	T	
			1.25±0.20	I	
1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10	B	0.60±0.20 (0.5±0.25)***
			0.95±0.10	C	
			1.25±0.10	D	
	3.20±0.20	1.60±0.20	1.15±0.15	J	
			1.60±0.20	G	
	3.20±0.30/-0.10	1.60±0.30/-0.10	0.85±0.10	T	
1210 (3225)	3.20±0.30	2.50±0.20	1.60±0.30/-0.10	P	0.75±0.25
			0.95±0.10	C	
			0.85±0.10	T	
	3.20±0.40	2.50±0.30	1.25±0.10	D	
			1.60±0.20	G	
			2.00±0.20	K	
1808 (4520)	4.50±0.40 (4.5±0.5/-0.3)**	2.03±0.25	2.50±0.30	M	0.75±0.25 (0.5±0.25)***
			1.25±0.10	D	
			1.40±0.15	F	
			1.60±0.20	G	
1812 (4532)	4.50±0.40 (4.5±0.5/-0.3)**	3.20±0.30	2.00±0.20	K	0.75±0.25 (0.5±0.25)***
			1.25±0.10	D	
			1.60±0.20	G	
		3.20±0.40	2.00±0.20	K	
			2.50±0.30	M	
			2.80±0.30	U	
1825 (4563)	4.60±0.50	6.30±0.40	1.60±0.20 (G) 2.00±0.20 (K) 2.50±0.30 (M) 2.80±0.30 (U)		≥0.26
2211 (5728)	5.70±0.50	2.80±0.30			≥0.30
2220 (5750)	5.70±0.50	5.00±0.40			
2225 (5763)	5.70±0.50	6.30±0.40			
0505 (1414)	1.40±0.38/-0.25	1.40±0.38	1.15±0.15	J	0.25±0.25/-0.13
1111 (2828)	2.79±0.51/-0.25	2.79±0.38	≤ 1.78	G	0.38±0.25

* R = Reflow soldering process ; W = Wave soldering process.

*Values for reference

** For 1808inch_200V ~3kV, 1812inch_200V~3kV and safety certificated products.


*** For 1206inch_1000V ~3kV, 1808inch_200V ~3kV, 1812inch_200V~3kV and safety certificated products.

#1 : For 0603inch/Cap ≥ 10μF or 0603inch(≤6.3V)/Cap ≥ 4.7μF For 0603inch(>10V)/Cap>1μF products.

#2 : For 0201inch/Cap ≥ 0.68μF products. #3 : For 0201inch/Cap ≥ 1μF products.

The table only for General Purpose Series, Soft termination and others please refer to individual sheet for details.

Capacitor Array



Unit : mm

Size Inch (Metric)	L	W	T/Symbol		S	BW	P
0603 x 4 0612 (1632)	3.20±0.15	1.60±0.15	0.80±0.10	B	0.30±0.20	0.40±0.15	0.80±0.15
0402 x 4 0508 (1220)	2.00±0.15	1.25±0.15	0.85±0.10	T	0.20±0.10	0.25±0.10	0.50±0.10

Reflow soldering process only.

*Values for reference



Capacitors

KAMAYA OHM <http://www.kamaya.co.jp>

●Part Number Description

Example

[General Purpose MLCC / Middle & High Voltage MLCC]

1206	B	104	K	500	C	T
Size Inch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
01R5	N NP0	R47=0.47pF	A ±0.05pF	6R3=6.3 VDC	L Ag/Ni/Sn	B Bulk
0201	B X7R	0R5=0.5pF	B ±0.1pF	100=10 VDC	C Cu/Ni/Sn	C Bulk cassette
0402	F Y5V	1R0=1pF	C ±0.25pF	160=16 VDC		T 7" reeled
0603	X X5R	100=10pF	D ±0.5pF	250=25 VDC		Q 10" reeled
0805		101=100pF	F ±1%	500=50 VDC		G 13" reeled
1206		102=1000pF	G ±2%	101=100 VDC		
1210		103=0.01uF	J ±5%	201=200 Vdc		
1808		104=0.1uF	K ±10%	251=250 Vdc		
1812		105=1uF	M ±20%	501=500 Vdc		
1825		106=10uF	Z -20/+80%	631=630 Vdc		
2220		107=100uF		102=1k Vdc		
2225				202=2k Vdc		
0505				302=3k Vdc		
1111						

[High Q/Low ESR MLCC / Microwave MLCC / Safety / Certificated MLCC / Automotive MLCC]

RF	03	B	104	K	500	C	T
HH High Q/ Low ESR	Size Inch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
RF Microwave	02=01R5	N NP0	R47=0.47pF	A ±0.05pF	6R3=6.3 VDC	L Ag/Ni/Sn	B Bulk
S2 X1/Y2 safety class	03=0201	B X7R	0R5=0.5pF	B ±0.1pF	100=10 VDC	C Cu/Ni/Sn	C Bulk cassette
S3 X2/Y3 safety class	15=0402	F Y5V	1R0=1pF	C ±0.25pF	160=16 VDC	P Cu/Polymer/Ni/Sn	T 7" reeled
MG Automotive Cap. without AEC-Q200	11=0505	X X5R	100=10pF	D ±0.5pF	250=25 VDC		Q 10" reeled
MT Automotive Cap. with AEC-Q200	18=0603		101=100pF	F ±1%	500=50 VDC		G 13" reeled
	21=0805		102=1000pF	G ±2%	101=100 VDC		
	22=1111		103=0.01uF	J ±5%	201=200 Vdc		
	31=1206		104=0.1uF	K ±10%	251=250 Vdc		
	32=1210		105=1uF	M ±20%	501=500 Vdc		
	42=1808		106=10uF	Z -20/+80%	631=630 Vdc		
	43=1812		107=100uF		102=1k Vdc		
	52=2211				202=2k Vdc		
	55=2220				302=3k Vdc		
	56=2225						

[Soft Termination MLCC]

SH	03	B	104	K	500	SH:C	T
SH With Ag polymer	Size Inch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
SG With Cu polymer	02=01R5	N NP0	R47=0.47pF	A ±0.05pF	6R3=6.3 VDC	SH:C Cu/Polymer/ SG:C Ni/Sn	B Bulk
	03=0201	B X7R	0R5=0.5pF	B ±0.1pF	100=10 VDC		C Bulk cassette
	15=0402	F Y5V	1R0=1pF	C ±0.25pF	160=16 VDC		T 7" reeled
	11=0505	X X5R	100=10pF	D ±0.5pF	250=25 VDC		Q 10" reeled
	18=0603		101=100pF	F ±1%	500=50 VDC		G 13" reeled
	21=0805		102=1000pF	G ±2%	101=100 VDC		
	22=1111		103=0.01uF	J ±5%	201=200 Vdc		
	31=1206		104=0.1uF	K ±10%	251=250 Vdc		
	32=1210		105=1uF	M ±20%	501=500 Vdc		
	42=1808		106=10uF	Z -20/+80%	631=630 Vdc		
	43=1812		107=100uF		102=1k Vdc		
	52=2211				202=2k Vdc		
	55=2220				302=3k Vdc		
	56=2225						

Film Capacitors

●Dipped metallized film capacitors

●CR Units



Film Capacitors Summary

Summary		Style	Series Code	Features	Rated Voltage	Capacitance (μF)	Temp. Range (°C)
General use	Standard		FPB	· Small	250VDC 450VDC 630VDC 1250VDC	0.47~10 0.22~4.7 0.068~2.2 0.001~0.22	-40 ~ +85 (+105)
			NEW FPT	· High temperature availability (~ +125°C)	630VDC	0.01~2.2	-40 ~ +105 (+125)
			MDX	· Standard	250VDC 450VDC 630VDC	0.01~10 0.01~4.7 0.015~2.2	-40 ~ +85 (+105)
			MDS	· Standard	100VDC 250VDC 400VDC 630VDC	0.56~10 0.18~10 0.039~4.7 0.01~2.2	-40 ~ +85 (+105)
			MDD	· Lead pitch 5mm, 7.5mm	50VDC 63VDC 100VDC 250VDC	0.1~2.2 0.1~1.0 0.047~0.47 0.01~0.15	-40 ~ +85 (+105)
	PFC circuit in power		FPS4	· Small · Low noise · Halogen-free product	450VDC	0.47~2.2	-40 ~ +85 (+110)
			FPS3	· Low Noise · Halogen-free product	450VDC	0.47~2.2	-40 ~ +85 (+110)
			FPA	· Standard · Halogen-free product	450VDC 550VDC	0.47~2.2	-40 ~ +85 (+110)
	Large capacitance		MDL	· Miniature and Large capacitance · For high frequency and high ripple	35VDC 63VDC	4.7~22 10~22	-40 ~ +85 (+105)
	High voltage		MDD	· High voltage 500 VAC.	500VAC	0.0022~0.1	-40 ~ +85 (+105)
High frequency circuit use			FPF	· Large current	250VDC 450VDC 630VDC	0.01~10 0.01~3.3 0.01~2.2	-40 ~ +105
			FPD4	· Standard	250VDC 450VDC 630VDC	0.01~10 0.01~3.3 0.01~2.2	-40 ~ +105
			FPD5	· Small	450VDC	0.47~2.2	-40 ~ +105
Across- the- line use			CFD-N	· For Japan · For noise immunity test	125VAC 250VAC	0.033~4.7 0.01~2.2	-40 ~ +85 (+105)
Surge absorber C-R units			CR	· C-R Unit	125VAC 250VAC	0.1μF +120Ω 0.033μF +120Ω	-40 ~ +85
			CRKH	· C-R Unit · UL,VDE Safety Standard	275VAC	0.01~0.1μF 47, 100, 120Ω	-40 ~ +100

●Compliance with ROHS requirement

Our film capacitors (all products in the above list) comply with ROHS requirement.

About Nitsuko product, Please contact as follows.

Nitsuko Nitsuko Electronics Corporation <http://www.nitsuko-ele.co.jp/>

Development · Sales Department

2031-1, Ogawara, Suzaka-shi, Nagano-ken, Postcode 382-0071

TEL (+81) 26-246-6351 FAX (+81) 26-245-6239 E-Mail: ec@nitsuko-ele.co.jp

SMD Product handling manual

1. Scope

This product handling manual is applied to parts for the surface mounting that KAMAYA ELECTRIC CO., LTD. produce.

2. Storage

Consider the following four points for keeping the environment, the storage method, and the storage period to maintain the qualities of parts below.

2.1 Avoid storing in locations where corrosive gas is present (Sea breezes, Cl₂, H₂S, NH₃, SO₂, NO₂, etc.) or in dusty and moist circumstances. Otherwise, it may result in deterioration of performance and adversely affect the soldering.

2.2 Avoid keeping goods in high temperature and direct sunlight. Otherwise, it may cause deformation of packing materials, and adherence of parts on packing materials.

2.3 Please enforce First-In & First-Out for the use of parts in consideration of the change in the environmental condition.

2.4 Store these products in the following environment.
Temperature: 5 to 35°C
Humidity : 25 to 75%
Terms of guarantee: 2 years

3. Pattern Design

To solder parts on the printed circuit board properly, it is necessary to take a careful attention in design stage.

It is necessary to consider the land pattern position by mounting equipment, method of soldering (flow or reflow), and material of print circuit board. Moreover, it is necessary to consider the position of adhesive and the array of parts at the flow soldering. Refer to Page 62 for recommended land pattern of Kamaya product


3.1 Strength of parts might decrease under the condition that the width or the shape of land pattern is too large, or the bend of the substrate occurs when gap of soldering position is generated or there are a lot of solder quantities.

3.2 Interval of parts should not narrow too much for the short-circuit prevention.
In general, it is safer to open more than 0.5mm from the positioning accuracy of mounting.

3.3 The resistor is a generation of heat source.
The pattern design that opens enough distance is necessary from other generation of heat parts.
Especially, use do enough derating of the rated dissipation for a high voltage circuit after considering the temperature rises of the adjoining generation of heat parts.

3.4 When the flow soldering is executed, soldering differs depending on the direction where the printed circuit board is thrown.

Figure-1

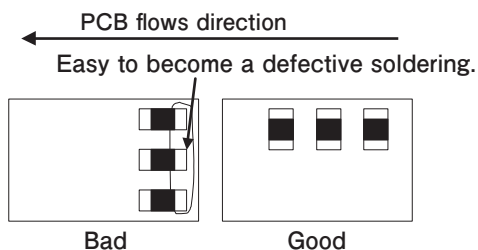


3.5 Examples of division of land pattern (Cross-sectional view)


- Land share with lead component.
- Mounted near Chassis.
- Side by side array.

Figure-2


a) Land share with lead component.

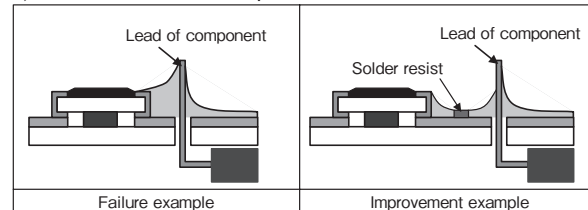

b) Mounted near chassis

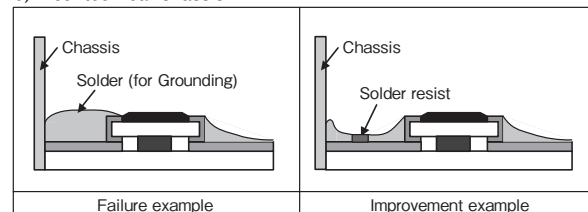

c) Side by side array

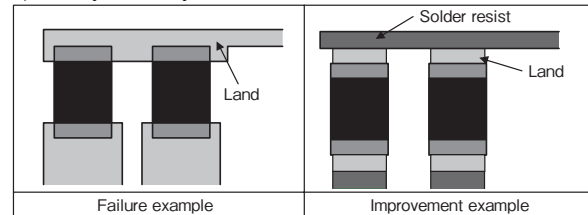


3.6 Avoid the component placement to the following places.

- Near cutting line of print circuit board.
- Place where print circuit board is distorted and mechanical stress is received easily.

Figure-3

Layout of resistors near the cutting line of print circuit board.
Improper A → B → C&D → Proper



4. Print Circuit Board

Please consider following respects.

4.1 Thermal diffusivity (thermal conductivity)

Thermal diffusivity through the print circuit board is necessary for generation of heat from parts.
Especially, use the print circuit board with high thermal conductivity when the calorific value is large.

4.2 Resistance to soldering heat

Select a heatproof, good substrate to soldering parts.
Because it often solders two or more times.

SMD PRODUCT HANDLING MANUAL

4.3 Pull peel strength of land pattern

Consider that the print circuit board corresponding to the land pattern size and sticking strength with the copper foil.

4.4 Bend strength

The stress in the electrodes and parts body, when the PCB bends by weight and external stress of parts, causes the joining electrode flaking off and the crack. Consider the bend ability of print circuit board.

5. Adhesive

When an adhesive is applied, the spread should be set corresponding to each part so that there are no overflow into the land or no dropout of the parts.

5.1 Strength of adhesive must be strong not to fall and move parts in the mounting process.

5.2 Stiffen at the low temperature as much as possible. Do not heat parts as the cure temperature.

5.3 Keep without stringy, slumping adhesion, and dewetting that solder can not adhere to parts.

5.4 After soldering, there must be no causticity.

6. Mounting

Please consider following to install parts in the printed circuit board.

- 1) Gap of installing position
- 2) Product floating from land pattern
- 3) Mechanical stress to overcoat of parts.

6.1 Do not touch with bare-handed in the electrode and wash it well with an organic solvent when the foreign body such as oils and fats adheres.

6.2 Mounting trouble of static electricity may occur when you touch or rub the part, packaging materials and the cover tape of the taping especially. When you deal with parts on the worktable, please execute the static electricity prevention measures (like the electrification prevention mat).

7. Soldering

7.1 The lead free is recommended in the solder paste.

Select appropriate solder paste after executing the evaluations of soldering and strength of bond, etc.


7.2 Select flux without the causticity.

7.3 The conditions of temperature and time should be well considered in the soldering process so that any warp or twist in the printed circuit board may not grow. Moreover, the electrode might flake off when the substrate is bent after it solders or the high impact is given parts or around it.

7.4 In VPS Reflow, preheat well so that the difference of temperature may not big too much between parts and inside of furnace. A big difference of temperature cause drop out of parts.

7.5 Do not rub the electrodes of resistor with soldering iron. The electrode may flake off when the iron is pressed on the electrode. Do not raise the temperature of the soldering iron more than necessary when the side electrode of parts is formed with the Ag resin.

Figure-4

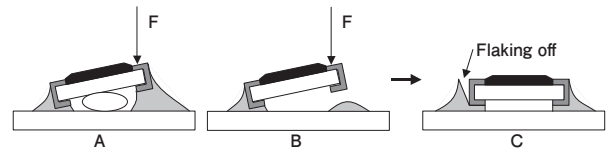

7.6 The overcoat and the main body may be chipped off when you hold the parts strongly with tweezers.

Do not use parts detached from the print circuit board once again.

7.7 Please refer to page 63 for our recommended soldering conditions.

8. Cleaning

The remaining of the flux on print circuit board with part mounted may cause a bad effect on humidity resistance and corrosion resistance. Please use a rosin flux with low chlorine-containing, or alcoholic and hydrocarbon solvent.

9. Other Notes

9.1 The use of the products mentioned in this catalog refers to consumer applications that are available on the open market.

9.2 There are cases which high levels of reliability distinctive from consumer applications sold on the open market are necessary for electrical components which are used in equipment that could effect human life or create huge social loss owing to defect in medical equipment, space equipment, nuclear power-related equipment, vehicle mounted equipment, aircraft and other equipment. When you examine the use in the above-mentioned equipment or for uses not mentioned within this catalog, ensure that you consult with our sales department prior to deployment.

9.3 As the use of resistors and surface-mounted parts used in all electrical components, especially resistors used in high-voltage circuits and in circuits prescribed for safely regulations, will be greatly affected by the circuit used, the method of mounting, the material, and environmental conditions, ensure that you consult with our sales department prior to deployment when examining the viability of use in characteristic circuits, mounting methods, material and under characteristic environmental conditions,

9.4 Thoroughly verify performance and reliability when using under the following characteristic environmental conditions :

- (1) Use within a liquid environment (Water, oil, liquid chemical, organic solution, etc.)
- (2) Use in direct sunshine. Outdoors in heavy dew, in dusty environments, or where corrosive gas is present (Sea breezes, Cl₂, H₂S, NH₃, SO₂, NO₂, etc.)
- (3) Use in environments with strong electrostatic or magnetic waves exists.
- (4) Use nearby flammable substances.
- (5) Use with the resistors coated in resin, etc.
- (6) Use of water or water solution for flux cleaning after unwashed soldering or soldering.
- (7) Use under environment of condensation

9.5 Ensure that the condition of the mounting is evaluated and verified on circuit boards when subjected to overloads in the form of pulses or surges, etc.

9.6 Take cares handling these products as they may be damaged and become defective if subject to impact, such as dropping.

SMD Product handling manual (RECOMMENDED LAND PATTERN)

Note: This land pattern is not supported by the mounting evaluation.


This is reference information only.

● Application

All KAMAYA Surface Mount Devices

● Recommended land pattern (Reference)

1. Square chip type (No. of terminals: 2)

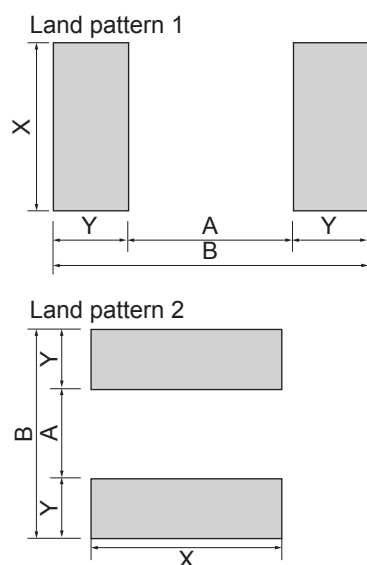

Land pattern	Size		Flow soldering				Reflow soldering			
	Metric	Inch	A	B	X	Y	A	B	X	Y
1	0402	01005	Not applied				0.18	0.58	0.2	0.2
	0603	0201					0.3	0.9	0.3	0.3
	1005	0402					0.5	1.3	0.5	0.4
	1608	0603	1.0	2.6	0.8	0.8	1.0	2.0	0.8	0.5
	2012	0805	1.3	3.1	1.25	0.9	1.3	2.7	1.25	0.7
	3216	1206	2.2	4.3	1.6	1.05	2.2	3.9	1.6	0.85
	3225	1210	2.2	4.3	2.5	1.05	2.2	3.9	2.5	0.85
	5025	2010	3.9	6.3	2.5	1.2	3.9	5.9	2.5	1.0
2	6332	2512	5.2	7.6	3.2	1.2	5.2	7.2	3.2	1.0
	1632	0612	0.6	2.8	3.2	1.1	0.6	2.4	3.2	0.9
	2550	1020	1.3	3.8	5	1.25	1.3	3.4	5	1.05
	3263	1225	2.0	4.5	6.3	1.25	2.0	4.1	6.3	1.05


*For RLP, MLP, WLP and DLP, the recommended land pattern is set by resistance values.

Please look at corresponding page for further information.

TWP is under development, please contact Kamaya contact window for the details.

*For RCC16 and RCC20, Please contact Kamaya sales dept.

2. Chip network type (No. of terminal: Multiple)

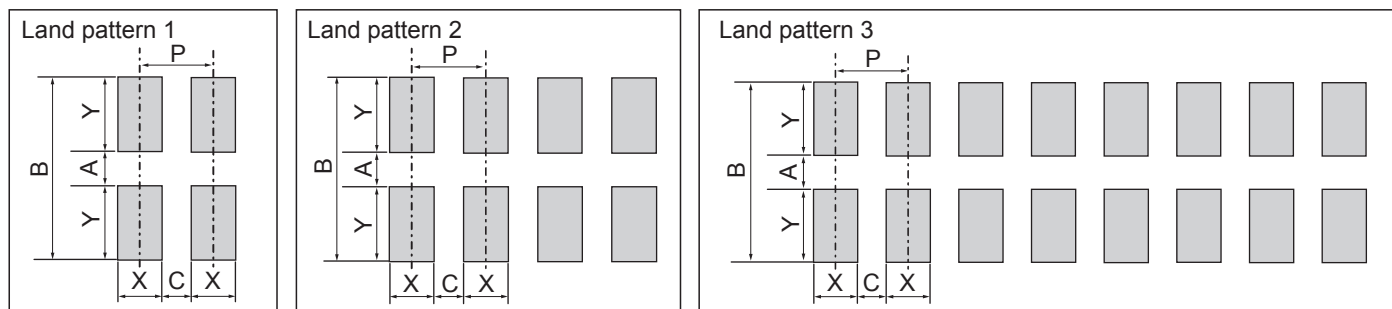

Land pattern	Style	Terminals style	P	Flow soldering					Reflow soldering				
				A	B	C	X	Y	A	B	C	X	Y
1	RAC062D, RAAW062D	D	0.5	Not applied					0.3	0.9	0.2	0.3	0.3
2	RAC064D, RAAW064D		0.4									0.2	
1	RAC102D, RAAW102D	C	0.65						0.5	1.3	0.34	0.33	0.4
	RAC101A												
2	RAC104D, RAAW104D		0.5						0.5	1.3	0.15	0.35	0.4
	RAC164D, RAAW164D		0.8	1.0	2.6	0.35	0.45	0.8	1.0	2.0	0.35	0.45	0.5
3	RAC168D		0.5	Not applied					1.0	2.0	0.2	0.3	0.5

● Others

(1) Please contact Kamaya Sales Dept. for other products and further details.

(2) Please carry out an enough mounting evaluation when use these patterns.

SMD Product handling manual (RECOMMENDED SOLDERING CONDITION)

Note: This soldering condition is not supported by the mounting evaluation.

This is reference information only.

● Application


All KAMAYA Surface Mount Devices

● Recommended soldering condition (Reference)

1. Reflow soldering


1.1 Recommended condition of Sn-Pb solder.

Reflow times: 2 times

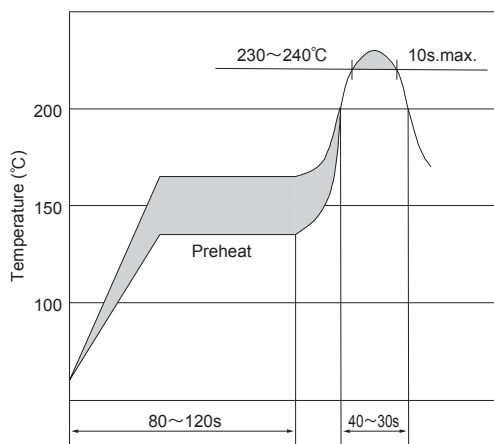


1.2 Recommended condition of Sn solder

Reflow times: 2 times

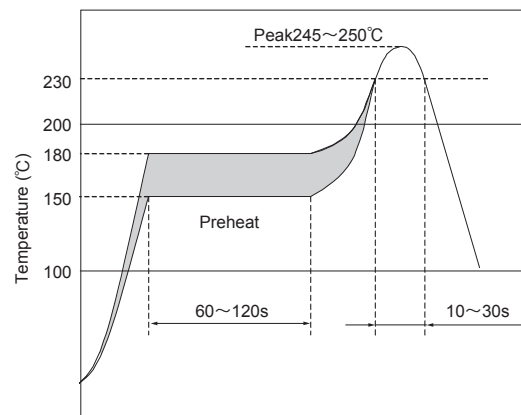

2. Flow soldering (Recommended condition of Sn solder and Sn-Pb solder)

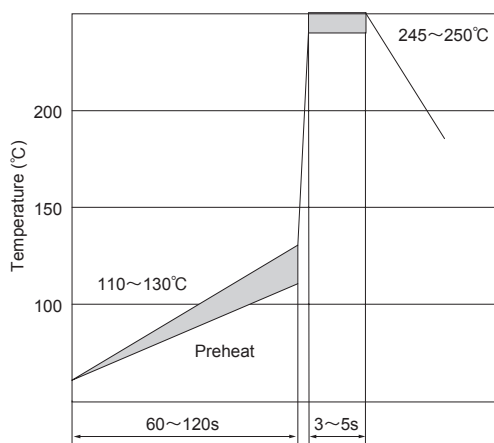

3. Soldering Iron (Recommended condition of Sn solder and Sn-Pb solder)

- (1) Temperature of soldering iron tip: 300°C, Duration: 10 s max.
- (2) Temperature of soldering iron tip: 350°C, Duration: 3 s max.

● Others

- (1) Please carry out enough mounting evaluation when use the profile except those above.
- (2) Please contact Kamaya Sales dept. for further information.

Term Explanation

•Resistors

Rated Dissipation

The maximum value of the electric power that can continuously be impressed to the resistor at the ambient temperature provided for within the category temperature range is indicated.

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the derating Curve.

Please note that the chip resistor networks provide for the rated dissipation of each element and each package when you use it.

Rated Voltage

The maximum value of the D.C or r.m.s. voltage that can continuously be impressed to the resistor at the ambient temperature provided for within the range of the category temperature range is indicated.

Rated Voltage = (Rated Dissipation) (Rated Resistance). (d.c. or a.c. r.m.s. Voltage)

However, Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Critical Resistance Value

Critical resistance value is the resistance value at which the rated voltage is equal to the limiting element voltage.

Below critical resistance value, please use the rated voltage as the limiting element voltage.

Limiting Element Voltage

The maximum value of the d.c. or r.m.s. voltage that can continuously be impressed to the resistor and the resistive element is indicated.

Limiting Element Voltage that provides for the kind and each shape is different.

Isolation Voltage

The maximum value of the d.c. voltage that can be impressed for 1 minute the one that the electrode (terminal) was lumped together and between the insulation exterior or substrates is indicated.

When the voltage that exceeds the isolation voltage is impressed for the electrode and the insulation exterior (substrate), the insulation exterior might be destroyed by generation of heat and the direct current electrolysis action by the leakage current.

Voltage proof


The r.m.s voltage is impressed for 1 minute the one that the electrode (terminal) was lumped together and between the insulation exterior or substrates, and the insulation exterior indicates the maximum value of the voltage that breakdown or flashover.

Category Temperature Range

The ambient temperature of the resistor that can continuously be used adding a regulated rated load (electric power) is shown. It is not a temperature of air outside of an electronic equipment, and it is necessary to compare it with the ambient temperature in the electronic equipment in which the resistor is built in.

Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

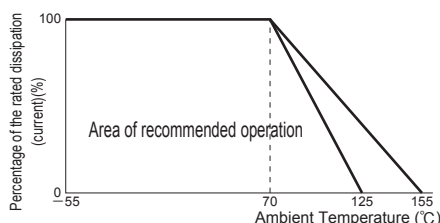

Variation of resistance with temperature (Temperature Coefficient of Resistance: TCR)

The change of resistance 1°C rate of the resistor within the range of the category temperature (category temperature range) is shown.

$$\text{Temperature Coefficient of Resistance: TCR } (\times 10^{-6}/^{\circ}\text{C}) = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^{-6}$$

R : Measured resistance at T°C

R₀ : Measured resistance at T°C

T : Measured test temperature (°C)

T₀ : Measured base temperature (°C)

Especially, because the resistance temperature coefficient tends the large dependence of the measurement resistance on the measuring method, RLC/RCC/RLP&MLP&WLP/TWLC needs noting.

Term Explanation

• Chip Fuses & Fusible Resistors

Joule Heat

It is the heat generated by the current.

The fuse melts inside by joule heat, and interrupts the current.

Fusible Characteristics

Relation between current (I) and fusion time (t) that flows to fuse.

It shows for the fusible Resistors by the relation between an impressed electric power (W) and the fusion time (W-t characteristic).

Rated Voltage

It shows maximum voltage value fuse can work properly.

It is the maximum voltage value in which the circuit can be safely interrupted after the fuse workings.

On selecting a fuse, it is necessary to confirm that the maximum rated voltage is less than rated voltage.

Interrupting Rating

It shows Maximum voltage(Rated voltage) and Maximum current for an interrupting circuit safely.

Maximum voltage and Maximum current should be applied below interrupting rating.

Working Temperature Range

It is temperature range fuse can works with specified condition,

Ambient temperature is to be within category temperature range.

Rated Current

A value of current which the fuse can be complied with, according to the test conditions.

It is different from the maximum current that applied to fuses, considering a long life span, the deratings are required.

Steady - State Current

It is current value at time that regularly flows to circuit regularly.

Deratings

1) Nominal Derating

It is derating value for rated current.

The reduction rate is depended on the type of fuse.

2) Temperature Derating

It is ambient temperature derating value for rated current.

The reduction rate is depended on the types of fuse and ambient temperature.

In-rush Current(Rush current)

Current that rapidly flows on circuit when power supply is turned on.

In many cases In-rush Current is bigger than Steady-state Current.

Chip fuses are confirmed to withstand In-rush Current.

Internal Resistance Value

An internal resistance values shown in this document include values in any materials of fuse, fuse element, outer terminations etc. Please refer to "section 10" for further information.

Additionally, resistance values are different depending on Temperature and Steady-state Current.

Maximum Open Circuit Voltage


Maximum open circuit voltage is the value of voltage applicable to both ends of resistors, when a resistor is open condition in a circuit.

This voltage shall be corresponding to 1,000 times the rated dissipation or maximum open circuit which is the less severe.

Product Marking

● Color coding


• Three - color band or four - color band system

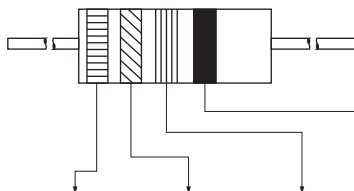

Color	1st color band 1st figure	2nd color band 2nd figure	3rd color band Multiplier	4th color band Resistance tolerance
Black	0	0	10^0	—
Brown	1	1	10^1	F($\pm 1\%$)
Red	2	2	10^2	G($\pm 2\%$)
Orange	3	3	10^3	—
Yellow	4	4	10^4	—
Green	5	5	10^5	—
Blue	6	6	10^6	—
Purple	7	7	10^7	—
Gray	8	8	10^8	—
White	9	9	10^9	—
Gold	—	—	10^{-1}	J($\pm 5\%$)
Silver	—	—	10^{-2}	K($\pm 10\%$)
Not colored	—	—	—	M($\pm 20\%$)


*For three-color band system the 4th color band is eliminated
(Resistance tolerance is $\pm 20\%$).

• Example

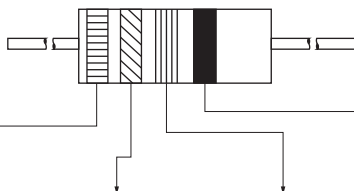

1st color band	2nd color band	3rd color band	4th color band
Brown	Red	Yellow	Gold
1	2	10^4	$\pm 5\%$
$12 \times 10,000 \text{ (ohm)} \pm 5\%$			
120k ohm J			


• Five - color band system

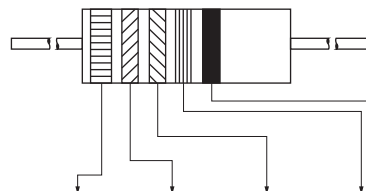

Color	1st color band 1st figure	2nd color band 2nd figure	3rd color band 3rd figure	4th color band Multiplier	5th color band Resistance tolerance
Black	0	0	0	10^0	—
Brown	1	1	1	10^1	F($\pm 1\%$)
Red	2	2	2	10^2	G($\pm 2\%$)
Orange	3	3	3	10^3	—
Yellow	4	4	4	10^4	—
Green	5	5	5	10^5	D($\pm 0.5\%$)
Blue	6	6	6	10^6	C($\pm 0.25\%$)
Purple	7	7	7	10^7	B($\pm 0.1\%$)
Gray	8	8	8	10^8	—
White	9	9	9	10^9	—
Gold	—	—	—	10^{-1}	—
Silver	—	—	—	10^{-2}	—

*RC1/2U : Please refer to page 32.

• Example

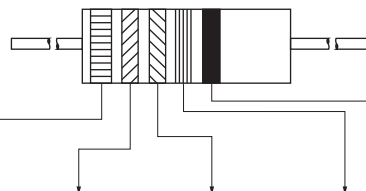

1st color band	2nd color band	3rd color band	4th color band	5th color band
Purple	Blue	Gray	Gold	Brown
7	6	8	10^{-1}	$\pm 1\%$
$768 \times 0.1 \text{ (ohm)} \pm 1\%$				
76.8 ohm F				

● Rated resistance symbols

The symbols to indicate rated resistance are depicted in 3 characters (for the E6, E12, and E24 series) or 4 characters (for the E48, E96 and E192 series) as indicated below.

In the case of 3 characters, the first and second character represent the effective numeral, and the third character is the multiplier following the effective numeral.

In the case of 4 characters, the first, second and third character represent the effective numeral, and the fourth character is the multiplier following the effective numeral.

When a decimal point exists, the decimal point is represented by an R for all effective numerals.

• 3-Digit (example)

Rated resistance symbols	Resistance value
R15	0.15 ohm
1R5	1.5 ohm
150	15 ohm
151	150 ohm
152	1.5k ohm
153	15k ohm
154	150k ohm
155	1.5M ohm
156	15M ohm
157	150M ohm

• 4-Digit (example)

Rated resistance symbols	Resistance value
R154	0.154 ohm
1R54	1.54 ohm
15R4	15.4 ohm
1540	154 ohm
1541	1.54k ohm
1542	15.4k ohm
1543	154k ohm
1544	1.54M ohm
1545	15.4M ohm
1546	154M ohm

• Resistance values of 100M ohm and greater(example)

Rated resistance symbols	Resistance value
100M	100M ohm
1G00	1G ohm
10G0	10G ohm
100G	100G ohm

*The letters M and G are used as multipliers for 10^6 and 10^9 respectively of the resistance value expressed in ohms.

● Code Tolerances

Code	Tolerance on rated resistance
H	$\pm 50\%$
N	$\pm 30\%$
M	$\pm 20\%$
K	$\pm 10\%$
J	$\pm 5\%$
G	$\pm 2\%$
F	$\pm 1\%$
D	$\pm 0.5\%$
C	$\pm 0.25\%$
B	$\pm 0.1\%$
W	$\pm 0.05\%$

● Temperature Characteristics Symbol Table

Code	Temperature coefficient of resistance
B	$\pm 5 \times 10^{-6}/^{\circ}\text{C}$
T	$\pm 10 \times 10^{-6}/^{\circ}\text{C}$
P	$\pm 15 \times 10^{-6}/^{\circ}\text{C}$
E	$\pm 25 \times 10^{-6}/^{\circ}\text{C}$
C	$\pm 50 \times 10^{-6}/^{\circ}\text{C}$
K	$\pm 100 \times 10^{-6}/^{\circ}\text{C}$
D	$\pm 200 \times 10^{-6}/^{\circ}\text{C}$
A	$\pm 500 \times 10^{-6}/^{\circ}\text{C}$
M	$\pm 1,000 \times 10^{-6}/^{\circ}\text{C}$
N	$\pm 70 \times 10^{-6}/^{\circ}\text{C}$

● Significant Figure of Resistance Value

E6	E12	E24	E48	E96	E192		
10	10	10	100	100	100		
				102	102		
				105	105		
			11	107	107		
				110	110		
				113	113		
		12	115	115	115		
				118	118		
				121	121		
			13	124	124		
				127	127		
				130	130		
		133		133			
		137		137			
		140		140			
		15	15	15	150	143	143
						145	145
						147	147
16	150				150		
	154				154		
	158				158		
18	162			160	160		
				162	162		
				165	165		
	20			169	169		
				174	174		
				178	178		
182				180	180		
				182	182		
				187	187		
205	191			189	189		
				191	191		
				193	193		
	196	196	196				
		198	198				
		200	200				
203	203	203					
	205	205					
	208	208					
210	210	210					
	213	213					
	216	216					

E6	E12	E24	E48	E96	E192	
22	22	22	215	215	215	
				221	218	
			226	226	221	
				232	223	
			237	232	226	
				237	229	
			243	240	232	
				243	234	
		24	249	249	240	
				255	243	
			261	261	246	
				267	249	
			274	274	252	
				280	255	
			287	287	258	
				294	261	
27	27	274	267	264		
			277	267		
	30	301	271	274		
			301	277		
	309	309	280	280		
			316	284		
	324	324	287	287		
			332	291		
33	33	33	332	332	294	
				340	298	
			348	348	301	
				357	305	
			365	365	309	
				374	312	
			383	383	316	
				392	320	
		36	36	365	324	324
					332	328
			374	374	332	
				383	336	
			392	392	340	
				402	344	
			412	412	348	
				422	352	
39	39	383	357	357		
			361	361		
	402	402	365			
		412	370			
	422	422	374			
		432	379			
	442	442	383			
		453	388			

E6	E12	E24	E48	E96	E192
47	47	47	464	464	464
				475	470
					481
				487	487
					493
					499
					505
					511
		51	511	511	517
				523	523
					530
				536	536
					542
					549
					556
					562
56	56	562	562	569	
			576	576	
				583	
			590	590	
				597	
				604	
				612	
				619	
	62	619	619	626	
			634	634	
				642	
			649	649	
				657	
				665	
				673	
				681	
68	68	681	681	690	
			698	698	
				706	
			715	715	
				723	
				732	
				741	
				750	
	75	750	750	759	
			768	768	
				777	
			787	787	
				796	
				806	
				816	
				825	
82	82	825	825	835	
			845	845	
				856	
			866	866	
				876	
				887	
				898	
				909	
	91	909	909	920	
			931	931	
				942	
			953	953	
				965	
				976	
				988	

*Please refer to each page for standard values of each parts.

Numerical Symbols and Multipliers

Code	T(tera)	G(giga)	M(mega)	k(kilo)	m(milli)	μ(micron)	n(nano)	p(pico)
Multiplier	10 ¹²	10 ⁹	10 ⁶	10 ³	10 ⁻³	10 ⁻⁶	10 ⁻⁹	10 ⁻¹²

Formula of Ohm's Law

Direct Current	Power(P)			Voltage(E)			Current(I)			Resistance(R)		
Calculating Formula	EI	I ² R	$\frac{E^2}{R}$	IR	\sqrt{PR}	$\frac{P}{I}$	$\frac{E}{R}$	$\sqrt{\frac{P}{R}}$	$\frac{P}{E}$	$\frac{E}{I}$	$\frac{E^2}{P}$	$\frac{P}{I^2}$




Kamaya Shipping Label

Kamaya products are put a shipping label on reel or other packaging.
Refer to the sample of the shipping label as follows.

•Example for chip resistors

RMC1/16K 272F TP 1608size, Fixed Thick Film Chip Resistor, 2.7k ohm F(±1%)

(1)	RMC1/16 K 272F TP 01	(7)
(2)	P/N XXXX	
(6)	2.7 KQF(XX-XXX) 5000PCS	(3)
		
(4)	L/N 071412282H (70815)	
(5)	KAMAYA OHM	

(1)Product type(Style, Temperature coefficient of resistance, Rated resistance, Tolerance, Packaging)

(2)Parts number from customer (P/N)

(3)Quantity

(4)Shipping Lot Number (L/N)

(5)Manufacturer

(6)Internal code 1

(7)Internal code 2

*There are cases in which (2) and (7) are not shown on Kamaya shipping label.

*Please contact Kamaya sales department, if you need to confirm this label specification.

RoHS Directive Compliance & REACH Action

1. RoHS Directive Compliance

(1) All Kamaya products are in compliance with RoHS directive*¹.

(2) The following 6 materials are prohibited by RoHS directive.

- | | |
|--------------|--------------------------------------|
| -Lead(Pb) | -Hexavalent Chromium |
| -Cadmium(Cd) | -Polybrominated Bipheuy(PBB) |
| -Mercury(Hg) | -Polybrominated Diphenyl Ether(PBDE) |

(3) PbO is content in glass materials of Kamaya products.

However, this is exception stated by RoHS directive.

=>Directive 2011/65/EU OF THE EUROPEAN PARLIAMENT
AND OF THE COUNCIL of 8 June 2011 7(c)-I

Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

(4) About shipment product after January, 2004 of our product(KAMAYA brand product), we ship it with an article (an electrode plating no lead article) for environment.

2. Kamaya REACH Action

Kamaya produce and develop our products in compliance with REACH*² which is effective since June 2007.

Please contact Kamaya Sales department about contained material of SVHC*³ in Kamaya product, which need permission in REACH regulation.

*1 RoHS Directive(The restriction of the certain hazardous substances in electrical and electronic equipment.)

*2. REACH (The Regulation for Registration, Evaluation, Authorization, and Restriction of Chemicals)

*3. SVHC (Substances of Very High Concern)
Substances in REACH regulation that especially affect the global environment and human body.
Please refer to ECHA (European Chemicals Agency) website for detail about SVHC in REACH regulation.

ECHA website :
(http://echa.europa.eu/chem_data/authorisation_process/candidate_list_table_en.asp)

•Kamaya Global Network

WORLD

KAMAYA ELECTRIC (H.K.) LTD./
DONGGUAN WAL SIN TECHNOLOGY ELECTRONICS CO., LTD.
HONG KONG, CHINA

SUZHOU WAL SIN TECHNOLOGY
ELECTRONICS. CO.,LTD.
SUZHOU, CHINA

KAMAYA INC. SAN DIEGO SALES OFFICE
SAN DIEGO, CA U.S.A

KAMAYA INC.
FORT WAYNE, IN U.S.A

HEAD OFFICE
KANAGAWA, JAPAN

KAMAYA INC.
EL PASO, TX U.S.A

WAL SIN TECHNOLOGY CORPORATION
YANG-MEI, TAIWAN

MMC ELECTRONICS (THAILAND) LTD. (SALES OFFICE)
THAILAND

KAMAYA ELECTRIC (M) SDN. BHD (FACTORY & SALES OFFICE)
PERAK, MALAYSIA

WAL SIN ELECTRONICS (S) PTE. LTD.
SINGAPORE

Application Facilities		Standard	Certification Organization	Certification No.	Rev. certificate Date	Certificate Date
JAPAN	NAIE Factory	ISO9001	Bureau Veritas Japan Co., Ltd	3367175	Mar.19,2015	Jul.28,1995
		ISO/TS16949		IATF 205849	Mar.19,2015	Mar.22,2012
		ISO14001		3187686	Apr.22,2014	May.9,2002
MALAYSIA	KAMAYA ELECTRIC(M)SDN, BHD.	ISO9001	NQA Global Assurance	49046	Jun.21,2016	Aug.10,2007
		ISO/TS16949		IATF 0241393	Jun.21,2016	Jul.26,2007
		ISO14001		E3242	Jun.11,2015	Jul.11,2007
China (WAL SIN Product)	DONGGUAN WAL SIN TECHNOLOGY ELECTRONICS CO., LTD.	ISO 9001	UL DQS Inc	20003508QM08	Oct.10,2016	May.21,1996
		ISO/TS16949	CTI International Certification	IATF 0249446	Oct.10,2016	Mar.25,2005
		ISO14001		04115E20091R4L	Aug.3,2015	Aug.13,2003
		OHSAS 18001	EICS	04114S20038R2L	Aug.1,2015	Aug.14,2008

JAPAN

NAIE FACTORY
HOKKAIDO RESEARCH CENTER

OSAKA OFFICE

HEAD OFFICE



釜屋電機株式會社
KAMAYA ELECTRIC CO., LTD.
<http://www.kamaya.co.jp>

HEAD OFFICE

PSA Building, 6-1-6, Chuo, Yamato-shi, Kanagawa, 242-0021, Japan
Tel : (+81) 46-204-8806 / Fax : (+81) 46-204-8955

E-mail : sales@kamaya.co.jp

Osaka Office	6th floor, Sin Nakajima Building, 1-9-20 Nishi Nakajima, Yodogawa-ku, Osaka-shi, Osaka, 532-0011 Tel : (+81) 6-6304-5761 / Fax : (+81) 6-6306-0131
Naie Factory, Hokkaido Hokkaido Research Center	955-1 Naie, Aza, Naie-cho, Sorachi-gun, Hokkaido, 079-0397 Tel : (+81) 125-65-2171 / Fax : (+81) 125-65-2177
Ayase Distribution Center	8-4-17, Fukayanaka, Ayase-shi, Kanagawa, 252-1107, Japan Tel : (+81) 467-71-0881 / Fax : (+81) 467-71-0911

U.S.A	KAMAYA INC. (SALES OFFICE AND WAREHOUSE) URL http://www.kamaya.com/ 6407 Cross Creek Blvd. Fort Wayne, IN 46818 U.S.A. Tel : (+1) 260-489-1533 / Fax : (+1) 260-489-2261 / E-mail : sales@kamaya.com KAMAYA INC. (SAN DIEGO SALES OFFICE) 4163 Cleveland Ave #1 San Diego, CA 92103 U.S.A. Tel : (+1) 858-775-6050 / Fax : (+1) 619-284-8749 KAMAYA INC. (EL PASO WAREHOUSE) 28-A Concord Street, El Paso, TX 79906 U.S.A. Tel : (+1) 915-779-7253 / Fax : (+1) 915-779-7180 / E-mail : sales@kamaya.com
TAIWAN	WALSIN TECHNOLOGY CORPORATION 566-1, Kao-shi Road Yang-mei, Taoyuan, 326, Taiwan, R.O.C. Tel : (+886) 3-4758711 / Fax : (+886) 3-4756747
MALAYSIA	KAMAYA ELECTRIC (M) SDN. BHD. (1ST FACTORY AND SALES OFFICE) No. 2, Jalan Klebang 1/5 Zone, Perindustrian Bebas, Kinta Jalan Kuala Kangsar, 31200 Chemor, Perak, Malaysia. Tel : (+60) 5-291-5522 / Fax : (+60) 5-291-2600 / E-mail : Kmy@kamaya.com.my KAMAYA ELECTRIC (M) SDN. BHD. (2ND FACTORY) No. 17, Jalan Klebang 1/6 Zone, Perindustrian Bebas, Kinta Jalan Kuala Kangsar, 31200 Chemor, Perak, Malaysia.
HONG KONG	KAMAYA ELECTRIC (H.K.) LTD. NO.638, Mei Jing West Road (523799) Xiniupo Administrative Zone Dalang Town, Dong-Guan City, Guang Dong Province, China. Tel : (+86) 769-8106-9331 / Fax : (+86) 769-8895-3204
CHINA	SUZHOU WALSIN TECHNOLOGY ELECTRONICS. CO.,LTD. NO.369 Changyang Street, Suzhou Industrial Park, Jiangsu P.R. 215024 China. Tel : (+86) 512-6283-6888 / Fax : (+86) 512-6283-0886 / E-mail : kamayasales@kamaya.co.jp
SINGAPORE	WALSIN ELECTRONICS (S) PTE. LTD. 24 Sin Ming Lane #04-100 Midview City Singapore 573970 Tel : (+65) 6262-3997
THAILAND	MMC ELECTRONICS (THAILAND) LTD. 191/38 CTI Tower 22nd Floor, Ratchadapisek Road, Klongtoey, Klongtoey, Bangkok, 10110 Thailand Tel : (+662) 258-2433, 2434 / Fax : (+662) 262-0926 / E-mail : mmethsa@mmeth.co.th

Important

Product specifications contained in this catalogue are subject to change at any time without notice. Please confirm specifications with your order.