



WAGO TOPJOB®S Terminal Blocks

The new standard for rail-mounted terminal blocks

TERMINATION & WIRING SYSTEMS

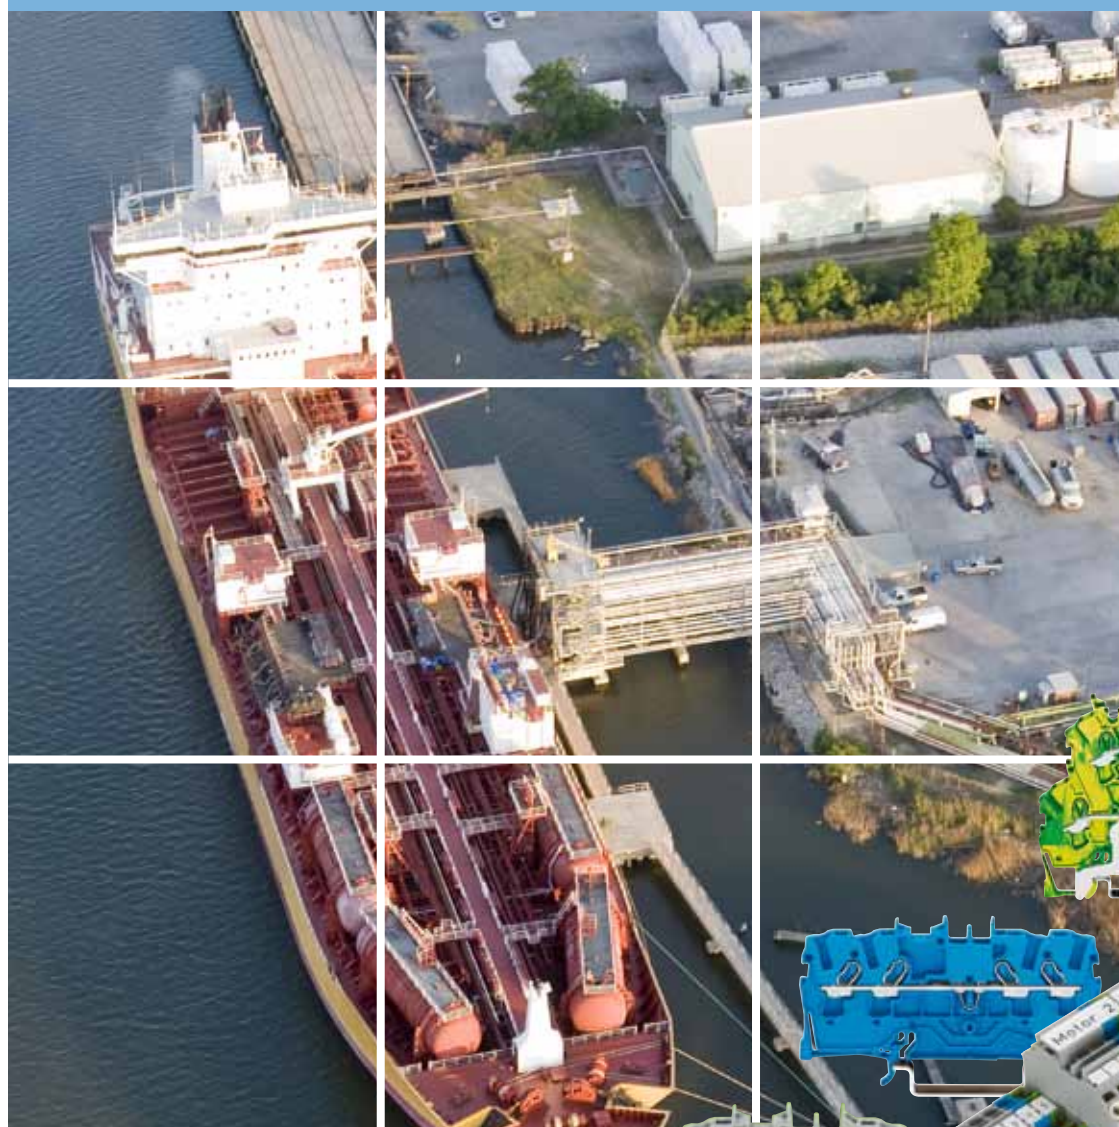

[Simply push-in]

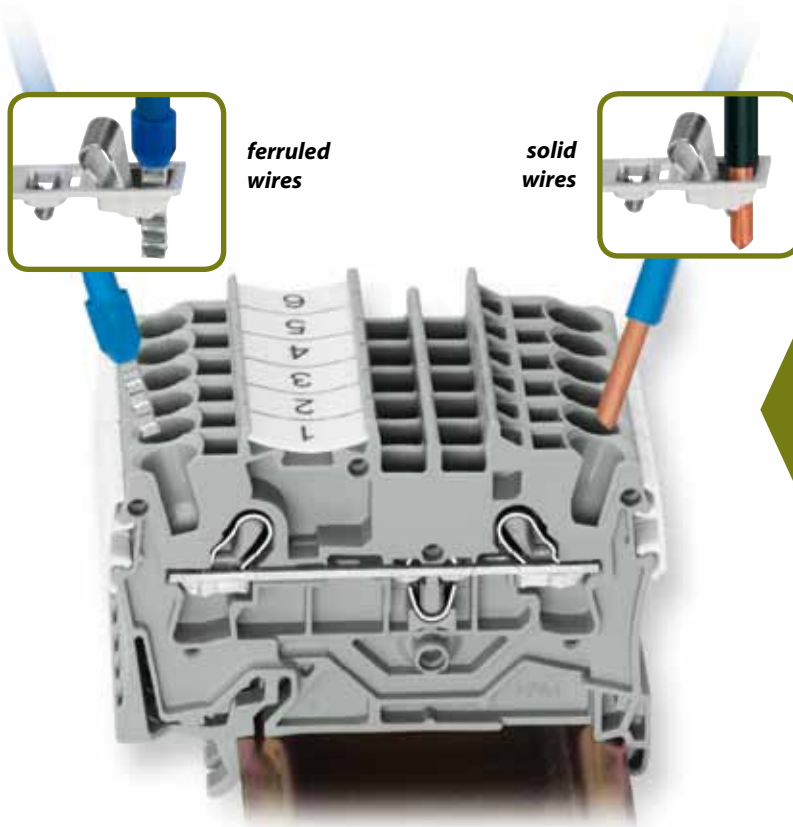

ferruled wires

solid wires

Stripped solid conductors or stranded conductors with ferrules are easily connected by simply pushing the conductor into the wire entry.

For conductors rated 0.5 mm² to 16 mm² - this is a significant time and cost saving!

Solid wires ranging from at least two sizes below to one size above the rated cross section can be pushed in directly without tools.

Stranded conductors with ferrules ranging from at least two sizes below the rated cross section up to the rated cross section can also be easily inserted without using any tools.

Wire connection using screwdriver


Connecting stranded conductors without ferrules or small cross-section conductors that cannot be pushed in, is done similar to the original CAGE CLAMP®, using a screwdriver.

The smart feature

To open the clamp, the screwdriver is inserted from the vertical and the conductor entry is less than 15 degrees resulting in easier wiring.

Wire removal


The conductor is removed using a screwdriver, like the original CAGE CLAMP®

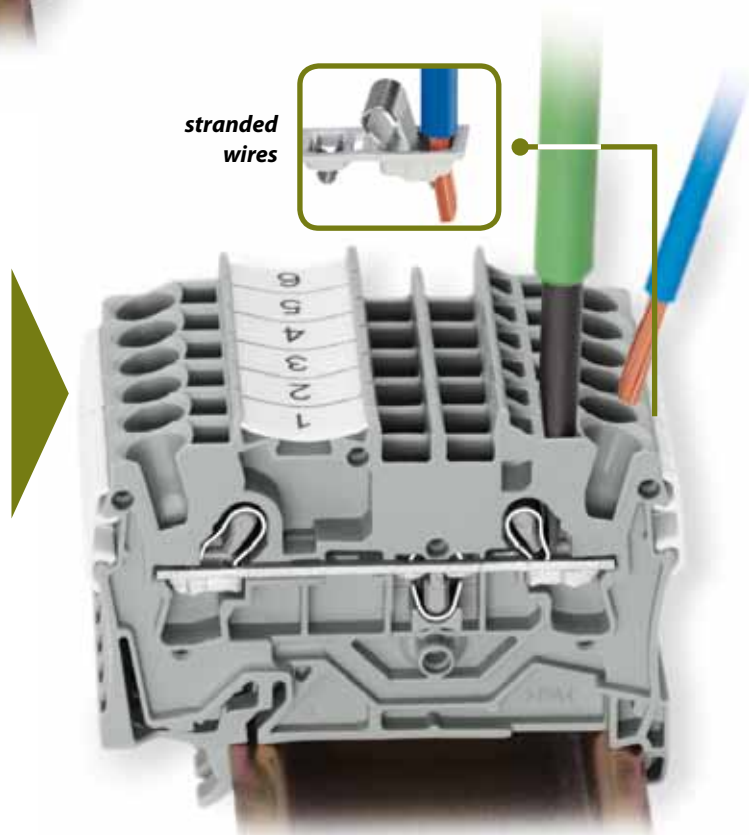

stranded wires

[Simply jumpered]

The comb-style jumper system is based on the common plug and socket principle. Each terminal block is spring loaded with a double socket and a resilient CrNi steel spring. The jumper contact is pure electrolytic copper, which allows for an extremely small design capable of carrying the full-rated current of the terminal block. Alternate or staggered jumpers for terminal blocks up to 4 mm² can be made in the field by simply breaking and removing jumper contacts.

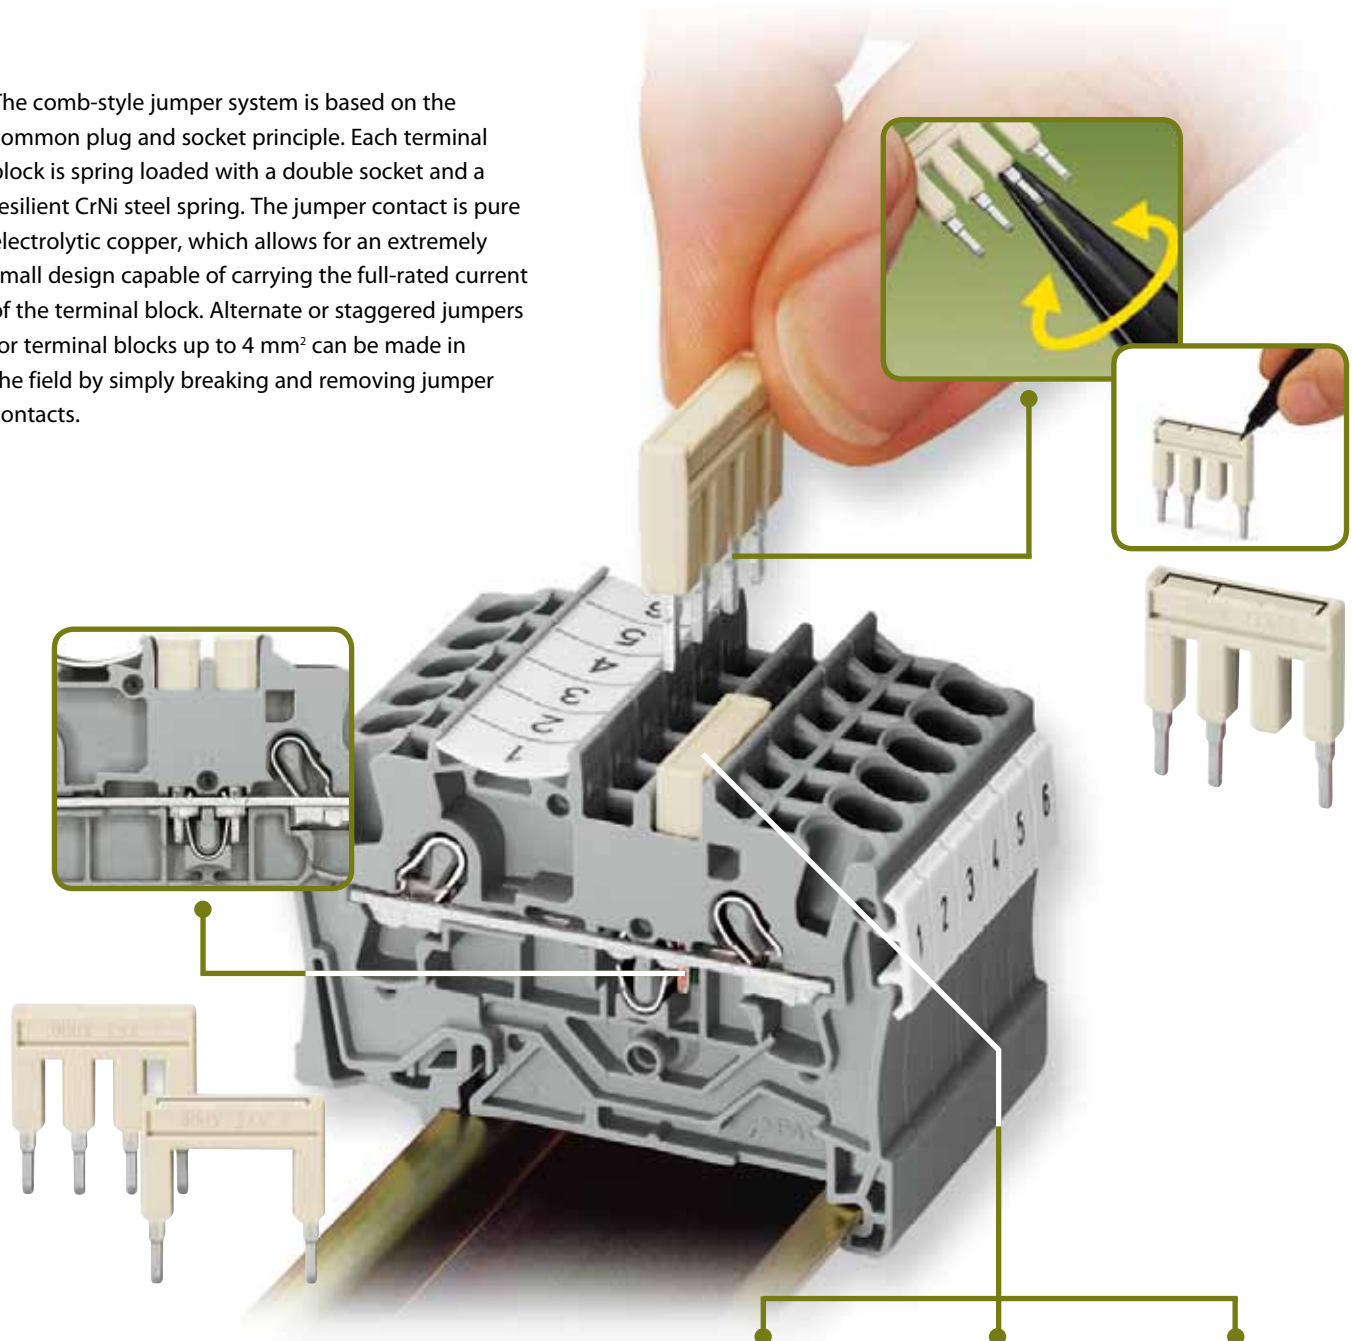


Removal of jumper

Insert the screwdriver blade between the jumper and the partition wall of the dual jumper slots and lift up the jumper.

Using jumpers with maximum 5 contacts, place the screwdriver in the centre of the jumper (see diag 3).

For more than 5-way jumpers, place the screwdriver alternating at both ends of the jumper.





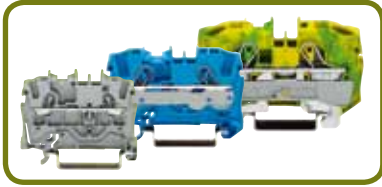

2-conductor terminal blocks
2.5 mm² , 6 mm² , 10 mm² , 16 mm²




3-conductor terminal blocks
2.5 mm² , 6 mm² , 10 mm² , 16 mm²

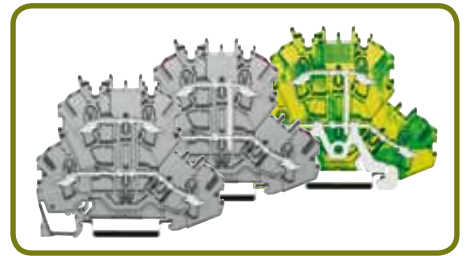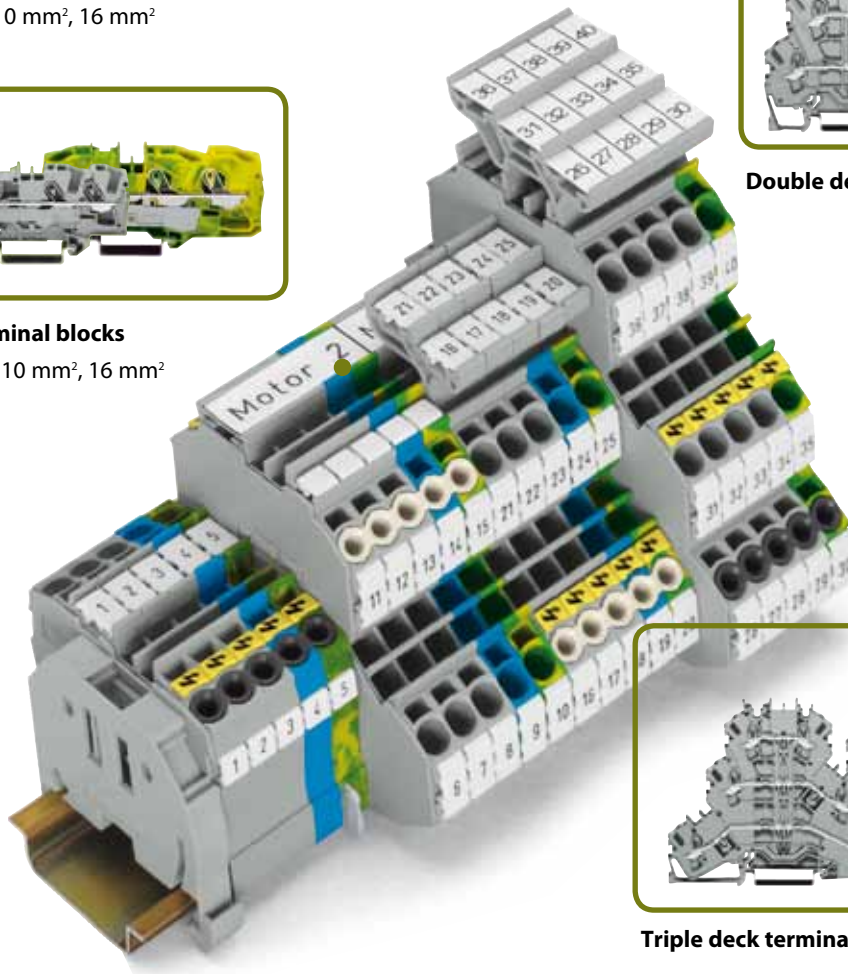

Double deck terminal blocks 2.5 mm²



Triple deck terminal blocks 2.5 mm²

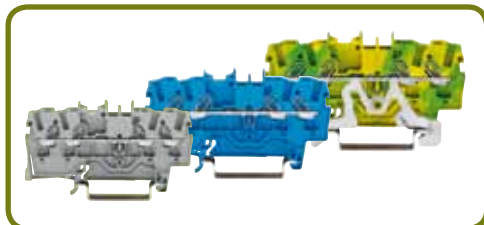

4-conductor terminal blocks
2.5 mm² , 4 mm²



2 & 4-conductor disconnect terminal blocks 2.5 mm²



Environmentally friendly:
TOPJOB'S terminal blocks are 100% leadfree!

Series	2002	2004	2006	2010	2016
Rated cross section	2.5 mm ²	4 mm ²	6 mm ²	10 mm ²	16 mm ²

Series	2002
Rated cross section	2.5 mm ²

Series 2002 - 2.5 mm² Through terminals

DIN 35 mounting


Conductor size: 0.25 - 2.5 mm²
Conductor entry: Front
Rating: 800 V, 24 amp

Stripping length: 10 - 12 mm 
Marking: Side/centre
Terminal width: 5.2 mm

Colours

- Grey
- Blue
- Orange
- Earth terminal

Through terminals



2 - Conductor Cat. No.


- 2002-1201
- 2002-1204
- 2002-1202
- 2002-1207



End / intermediate plate (orange)

Cat. No.

2002-1292



3 - Conductor Cat. No.


- 2002-1301
- 2002-1304
- 2002-1302
- 2002-1307



End / intermediate plate (orange)

Cat. No.

2002-1392

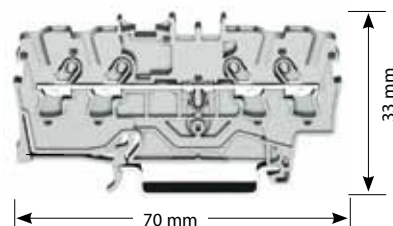

4 - Conductor Cat. No.


- 2002-1401
- 2002-1404
- 2002-1402
- 2002-1407



End / intermediate plate (orange)

Cat. No.

2002-1492



3 - Conductor Cat. No.


- 2002-6301
- 2002-6304
- 2002-6302
- 2002-6307



End / intermediate plate (orange)

Cat. No.

2002-6392



4- Conductor Cat. No.

- 2002-6401 *
- 2002-6404*
- 2002-6402*
- 2002-6407*



End / intermediate plate (orange)

Cat. No.


2002-6392

**Attention! Cannot be used with jumpers*

Series 2002 - 2.5 mm² Multi deck through terminals

DIN 35 mounting


Conductor size: 0.25 - 2.5 mm²
Conductor entry: Front
Rating: 500 V, 24 amp

Stripping length: 10 - 12 mm 
Marking: Side/centre
Terminal width: 5.2 mm

Colours

- Grey
- Blue
- Earth terminal

Double deck terminals




2 x 2 - Conductor through terminal Cat. No.

● 2002-2201
 ● 2002-2204



End / intermediate plate (orange)
 Cat. No.
 2002-2292




4 - Conductor through terminal with internal commoning Cat. No.

● 2002-2208
 ● 2002 - 2207



End / intermediate plate (orange)
 Cat. No.
 2002-2292

Triple deck terminals




Lower level	Centre level	Upper level	3 x 2 - Conductor through terminal
●	●	●	2002-3201
●	●	●	2002-3217
●	●	●	2002-3207



End / intermediate plate (orange)
 Cat. No.
 2002-3292

Quadruple deck terminal



Lower level	2 nd level	3 rd level	Upper level	3 x 2 - Conductor through terminal
●	●	●	●	2002-4127




End / intermediate plate (orange)
 Cat. No.
 2002-4192

Series 2002 - 2.5 mm² Disconnect terminals


DIN 35 mounting

Conductor size: 0.25 - 2.5 mm²
Conductor entry: Front
Rating: 400 V, 16 amp

Stripping length: 10 - 12 mm 
Marking: Side/centre
Terminal width: 5.2 mm

Colours
● Grey
● Blue
● Orange

'Knife' disconnect terminals

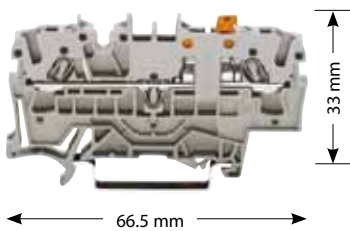

2 - Conductor Cat. No.

- 2002-1671
- 2002-1674
- 2002-1672




End / intermediate plate (orange)

Cat. No.

2002-1692

'Knife' disconnect terminals

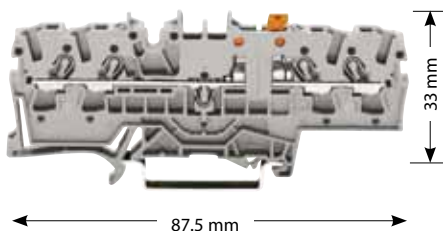

4 - Conductor Cat. No.

- 2002-1871
- 2002-1874
- 2002-1872




End / intermediate plate (orange)

Cat. No.

2002-1892

'Knife' disconnect double deck terminals

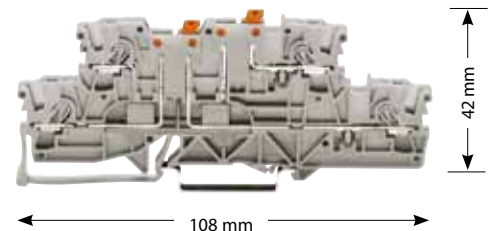

2 x 2 - Conductor
double disconnect Cat. No.

- 2002-2951
- 2002-2954




End / intermediate plate (orange)

Cat. No.

2002-2992

Matching through terminals of the same shape above



2 - Conductor Cat. No.


- 2002-1601
- 2002-1604
- 2002-1602



End / intermediate plate (orange)

Cat. No.

2002-1692

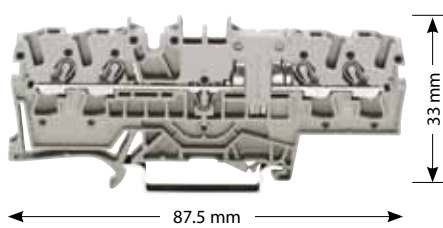

4 - Conductor Cat. No.

- 2002-1801
- 2002-1804
- 2002-1802




End / intermediate plate (orange)

Cat. No.

2002-1892

'Knife' disconnect double deck terminals

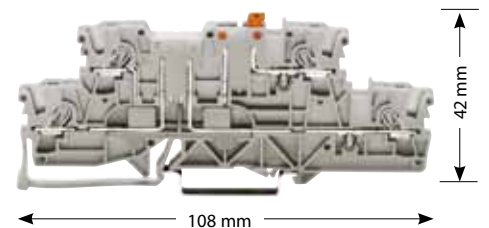

2 x 2-Conductor
single disconnect Cat. No.

- 2002-2971
- 2002-2974



End / intermediate plate (orange)

Cat. No.


2002-2992

Series 2002 - Fused terminals


DIN 35 mounting

Conductor size:	0.25 - 2.5 mm ²	Stripping length:	9 - 10 mm / 10 - 12 mm	
Conductor entry:	Front	Marking:	Side/centre	
Rating:	250 V, 6.3 amp	Terminal width:	5.2 / 6 mm	

Fused disconnect terminals



Description	2 - Conductor Cat. No.
For metric fuses 5 x 20 mm	2002-1611



Description	4 - Conductor Cat. No.
For metric fuses 5 x 20 mm	2002-1811



End / intermediate plate (orange)
Cat. No.
2002-992



End / intermediate plate (orange)
Cat. No.
2002-992


Notes:

Fused disconnect terminals are supplied fitted with individual end plate.

If used at the end of an assembly, a further end plate (2002-992) must be used.

Due to the 6.2 mm width of the fused disconnect terminal block, the 2004 series jumpers must be used.

Pluggable fuse terminals




Description	2 - Conductor Cat. No.
2 conductor terminal	2002-1661
4 conductor terminal	2002-1861



End / intermediate plate (orange)	
Description	Cat. No.
For 2002-1661	2002-1811
For 2002-1861	2002-1892



Description	Fuse plug Cat. No.
Fuse terminal plug 5 x 20 mm	2004-911



Description	Cat. No.
Disconnect plug for fuse terminal blocks	2002-41

Series 2004 - 4 mm² Through terminals


DIN 35 mounting

Conductor size: 0.5 - 4 mm²
Conductor entry: Front
Rating: 800 V, 32 amp

Stripping length: 11 - 13 mm 
Marking: Side/centre
Terminal width: 6.2 mm

Colours

- Grey
- Blue
- Orange
- Earth terminal



2 - Conductor Cat. No.


- 2004-1201
- 2004-1204
- 2004-1202
- 2004-1207



End / intermediate plate (orange)

Cat. No.

2004-1292



3 - Conductor Cat. No.


- 2004-1301
- 2004-1304
- 2004-1302
- 2004-1307



End / intermediate plate (orange)

Cat. No.

2004-1392

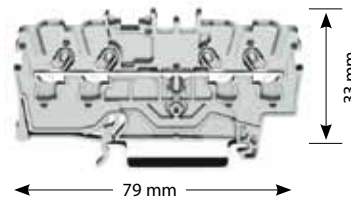

4 - Conductor Cat. No.

- 2004-1401
- 2004-1404
- 2004-1402
- 2004-1407



End / intermediate plate (orange)

Cat. No.

2004-1492


Series 2006 - 6 mm² Through terminals

DIN 35 mounting

Conductor size: 0.5 - 6 mm²
Conductor entry: Front
Rating: 800 V, 41 amp
Stripping length: 13 - 15 mm 
Marking: Side/centre
Terminal width: 7.5 mm

Colours

- Grey
- Blue
- Orange
- Earth terminal



2 - Conductor Cat. No.


- 2006-1201
- 2006-1204
- 2006-1202
- 2006-1207



End / intermediate plate (orange)

Cat. No.

2006-1292



3 - Conductor Cat. No.

- 2006-1301
- 2006-1304
- 2006-1302
- 2006-1307



End / intermediate plate (orange)

Cat. No.

2006-1392


Series 2010 - 10 mm² Through terminals

DIN 35 mounting

Conductor size: 0.5 - 10 mm²
Conductor entry: Front
Rating: 800 V, 57 amp
Stripping length: 17 - 19 mm 
Marking: Side/centre
Terminal width: 10 mm

Colours

-  Grey
-  Blue
-  Orange
-  Earth terminal



2 - Conductor Cat. No.


-  2010-1201
-  2010-1204
-  2010-1202
-  2010-1207



End / intermediate plate (orange)

Cat. No.

2010-1292

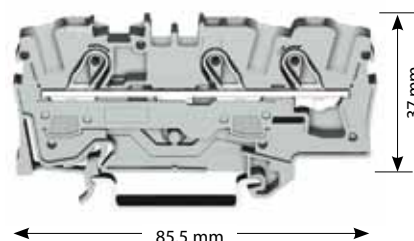

3 - Conductor Cat. No.

-  2010-1301
-  2010-1304
-  2010-1302
-  2010-1307




End / intermediate plate (orange)

Cat. No.

2010-1392


Series 2016 - 16 mm² Through terminals

DIN 35 mounting

Conductor size: 0.5 - 16 mm²
Conductor entry: Front
Rating: 800 V, 76 amp
Stripping length: 18 - 20 mm 
Marking: Side/centre
Terminal width: 12 mm

Colours

-  Grey
-  Blue
-  Orange
-  Earth terminal



2 - Conductor Cat. No.


-  2016-1201
-  2016-1204
-  2016-1202
-  2016-1207



End / intermediate plate (orange)

Cat. No.

2016-1292

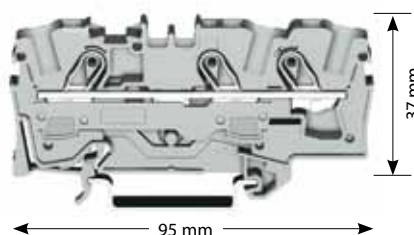

3 - Conductor Cat. No.

-  2016-1301
-  2016-1304
-  2016-1302
-  2016-1307



End / intermediate plate (orange)

Cat. No.

2016-1392

TOPJOB®S ACCESSORIES

Series 2002



Push-in jumper bars
- (In 25 A)

Cat. No.

2-way	2002-402
3-way	2002-403
4-way	2002-404
5-way	2002-405
10-way	2002-410

Series 2004



Push-in jumper bars
- (In 32 A)

Cat. No.

2-way	2004-402
3-way	2004-403
4-way	2004-404
5-way	2004-405
10-way	2004-410

Series 2006



Push-in jumper bars
- (In 41 A)

Cat. No.

2-way	2006-402
3-way	2006-403
4-way	2006-404
5-way	2006-405

Series 2010



Push-in jumper bars
- (In 57 A)

Cat. No.

2-way	2010-402
3-way	2010-403
4-way	2010-404
5-way	2010-405

Series 2016



Push-in jumper bars
- (In 76 A)

Cat. No.

2-way	2016-402
3-way	2016-403
4-way	2016-404
5-way	2016-405



Push-in jumper bars
- (In 25 A)

Cat. No.

1 to 3	2002-433
1 to 4	2002-434
1 to 5	2002-435
1 to 10	2002-440



Push-in jumper bars
- (In 32 A)

Cat. No.

1 to 3	2004-433
1 to 4	2004-434
1 to 5	2004-435
1 to 10	2004-440



Push-in jumper bars
- (In 41 A)

Cat. No.

1 to 3	2006-433
1 to 4	2006-434
1 to 5	2006-435



Push-in jumper bars
- (In 57 A)

Cat. No.

1 to 3	2010-433
1 to 4	2010-434
1 to 5	2010-435




Push-in jumper bars
- (In 76 A)

Cat. No.

1 to 3	2016-433
1 to 4	2016-434
1 to 5	2016-435

Insulated ferrules (package size = 100 pcs)

Dimensions (mm)	Suitable for series	Sleeve for mm ²	Colour	Stripped length	L	L1	D	D1	D2	Cat. No.
	2002	2.5	blue	14	17	10	4.7	4.2	2.2	216-246
	2004	4.0	grey	14	20	12	5.4	4.8	2.8	216-267
	2006	6.0	yellow	14	20	12	6.9	6.3	3.5	216-208
	2010	10.0	red	20	28	18	8.4	7.6	4.5	216-289
	2016	16.0	blue	23	28	18	9.6	8.8	5.8	216-210

Insulated ferrules electrolytic copper, electro-tin plated, acc. to DIN 46228, part 4/09.90

Markers



Horizontal marking 10 strips
with 10 markers per card



Vertical marking 10 strips
with 10 markers per card

Marking per card	Cat. No.	Marking per card	Cat. No.	Marking per card	Cat. No.	Marking per card	Cat. No.
1....10(10x)	793-5502	1....50(2x)	793-5566	1....10(10x)	793-5602	1....50(2x)	793-5666
11....20(10x)	793-5503	51....100(2x)	793-5507	11....20(10x)	793-5603	51....100(2x)	793-5607
21....30(10x)	793-5504	101....150(2x)	793-5508	21....30(10x)	793-5604	101....150(2x)	793-5608
31....40(10x)	793-5505	151....200(2x)	793-5509	31....40(10x)	793-5605	151....200(2x)	793-5609
41....50(10x)	793-5506	blank-self marking	793-5501	41....50(10x)	793-5606	blank-self marking	793-5501



AUSTRALIA

nhp.com.au

SALES 1300 NHP NHP

FAX 1300 NHP FAX

VICTORIA

Melbourne

43-67 River Street
Richmond
VIC 3121
Tel +61 3 9429 2999

Laverton

104-106
William Angliss Drive
Laverton North
VIC 3026
Tel +61 3 9368 2901

Albury / Wodonga

847 Ramsden Drive
Albury
NSW 2640
Tel +61 2 6049 0600
Fax +61 3 6025 0592

Dandenong

40-42 Cyber Loop
Dandenong South
VIC 3175
Tel +61 3 8773 6400
Fax +61 3 8768 8522

TASMANIA

Hobart

Unit 2
65 Albert Street
Moonah
TAS 7009
Tel +61 3 6228 9575
Fax +61 3 6228 9757

Launceston

Unit 3
13-17 Merino Street
Kings Meadows
TAS 7249
Tel +61 3 6345 2600
Fax +61 3 6344 6324

NEW SOUTH WALES

Sydney

30-34 Day Street North
Silverwater
NSW 2128
Tel +61 2 9748 3444

Newcastle

575 Maitland Road
Mayfield West
NSW 2304
Tel +61 2 4960 2220
Fax +61 2 4960 2203

Wollongong

34 Industrial Road
Unanderra
NSW 2526
Tel +61 2 4272 5763
Fax +61 2 4272 5957

ACT

Canberra

Unit 1
187 Gladstone Street
Fyshwick
ACT 2609
Tel +61 2 6280 9888
Fax +61 2 6280 9588

WESTERN AUSTRALIA

Perth

38 Belmont Ave
Rivervale
WA 6103
Tel +61 8 9277 1777

NORTHERN TERRITORY

Darwin

3 Steele Street
Winnellie
NT 0820
Tel +61 8 8947 2666
Fax +61 8 8947 2049

QUEENSLAND

Brisbane

16 Riverview Place
Murarrie
QLD 4172
Tel +61 7 3909 4999

Townsville

5 Leyland Street
Garbutt
QLD 4814
Tel +61 7 4779 0700
Fax +61 7 4775 1457

Rockhampton

1 Lawson Street
Parkhurst
QLD 4702
Tel +61 7 4927 2277
Fax +61 7 4922 2947

Toowoomba

Cnr Carroll Street and
Struan Court
QLD 4350
Tel +61 7 4634 4799
Fax +61 7 4633 1796

Cairns

Unit 2
1 Bramp Close
Portsmith
QLD 4870
Tel +61 7 4035 6888
Fax +61 7 4035 6999

SOUTH AUSTRALIA

Adelaide

36-38 Croydon Road
Keswick
SA 5035
Tel +61 8 8297 9055

NEW ZEALAND

nhp-nz.com

SALES 0800 NHP NHP

FAX 0800 FAX NHP

PO Box 62-009

**Sylvia Park
Auckland 1644
New Zealand**

Auckland

118a Carbine Road
Mt Wellington 1060
Tel +64 9 276 1967

Hamilton

78 Rostrevor Street
Hamilton 3204
Tel +64 7 849 0257
Fax +64 800 329 647

Napier

126 Taradale Road
Onekawa 4110
Tel +64 6 843 6928
Fax +64 800 329 647

New Plymouth

2 Dean Place
Waiwhakaiho 4312
Tel 0800 NHP NHP
Fax +64 800 329 647

Wellington

52 Victoria Street
Lower Hutt 5010
Tel +64 4 570 0634
Fax +64 800 329 647

Christchurch

27 Iversen Terrace
Waltham 8011
Tel +64 3 377 4407
Fax +64 3 377 4405

Dunedin

30 Fox Street
South Dunedin 9012
Tel 0800 NHP NHP
Fax +64 800 329 647

NHP Electrical Engineering Products Pty Ltd

A.B.N. 84 004 304 812

NWAGOTJC © Copyright NHP 2011



Environmentally Friendly
Printed on recycled paper

Authorised distributor within
our designated Area of
Primary Responsibility (APR).
Refer dark blue shaded area.

