

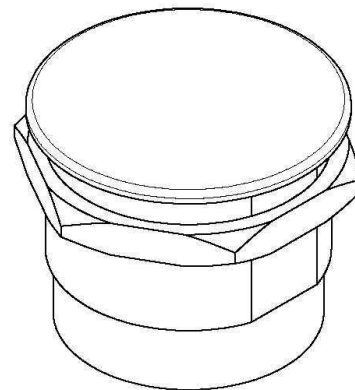


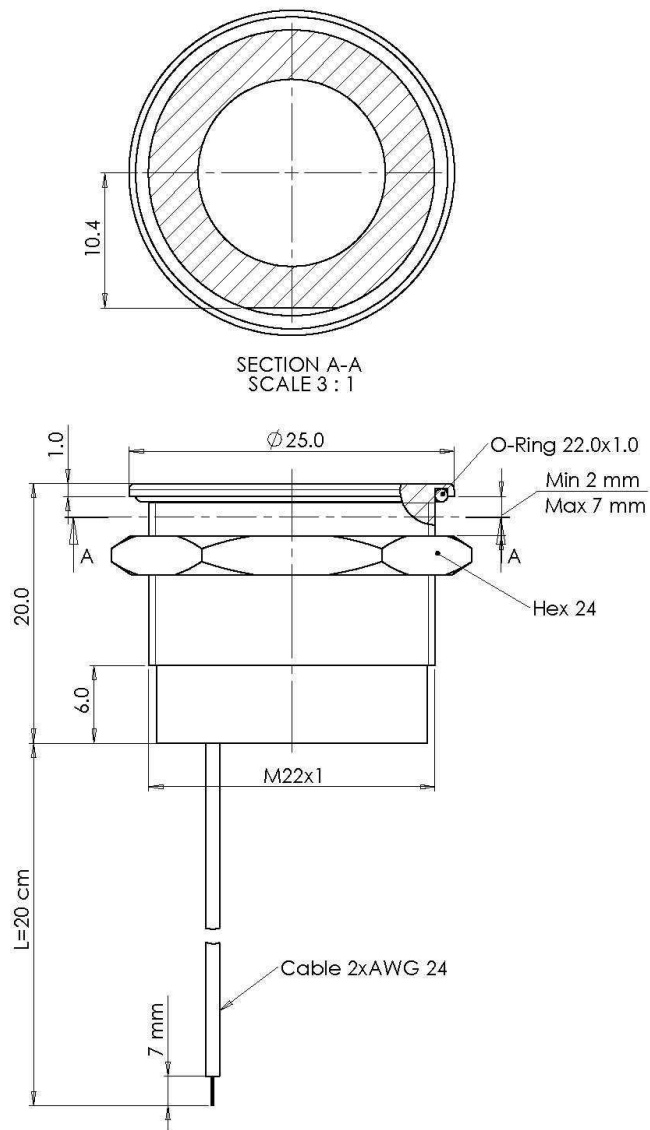

P/N 07225195
 -Rated voltage 0-24 V AC/DC
 -Switch current 1A
 -Switch pulse time up to: 300 msec



manufactured on: Date CE RoHS

NOTES:

1. Material: AISI 303
2. Rated Voltage: (0-24 V AC/DC)
 Rated Current: max 1A
 Switch Resistance "On": (<1 Ohm)
 Switch Resistance "Off": (> 5 Megaohms)
 Switch Capacitance : (100pF)
 Impulse Time : 300 mSEC
 Actuation Force Typically : (3-5 N)
 Climate data: -40C to +85C per MIL STD 810G
 Operating cycle : (>10 million)
3. IP protection: IP68 per IEC 60529; IP69K per DIN 40050-9
4. Mechanical shock : 75g per MIL STD 810G
5. Vibration: 5-500Hz/9.4m/s² per IEC 60721
6. Potting: Epoxy Resin Silicone Free

All Dimensions in: mm			Code:		TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale	Weight	
					THIS DRAWING IS VALID FOR THE FIRST 12 MONTHS AFTER THE DATE OF ISSUE AND NOT BE USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN PERMISSION OF IBS ELECTRONICS. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.		Material		
					Name	Date	Description	BPSSN22PNFK6	
					Engineer				
					Draftsman	Sasha 29.08.12			
1	13198	Update after lab tests	Sasha	26.05.13	Checked	Gabriel 29.08.12	Cat.no	07225195	
No	ECO	Description	Name	Date	Approval				
		Finish	IBS ELECTRONICS				Revision	Drawing no.	
							01	P40-06.00.00	
		Next assy					Sheet 1	of 1	A3