


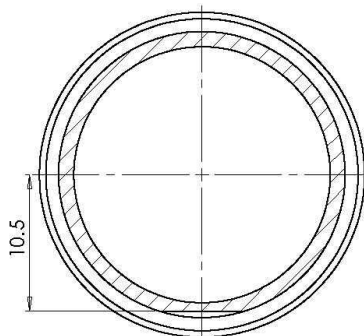


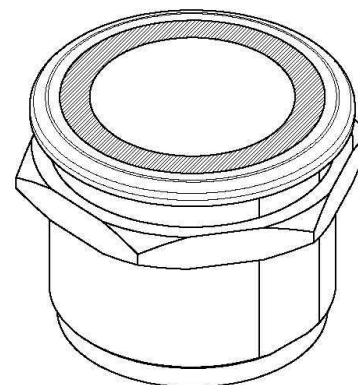

SECTION A-A
SCALE 3 : 1

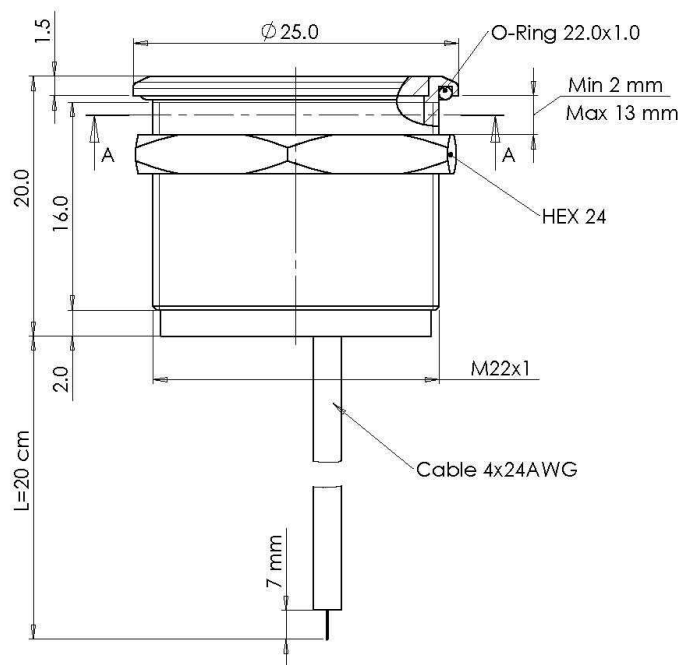

Manufactured by Stern Engineering
P/N 07225199
-Switch voltage 0-24 V AC/DC
-Switch current 1A
-White illuminated 24V AC/DC



NOTES:

- Material: AISI 303
- Rated Voltage: (0-24 V AC/DC)
Rated Current: max 1A
Switch Resistance "On" : (<1 Ohm)
Switch Resistance "Off" : (> 5 Megaohms)
Switch Capacitance : (100pF)
Overvoltage protection 34 V DC
Impulse Time : 300 mSEC
Actuation Force Typically : (3-5 N)
Climate data: -40C to +85C per MIL STD 810G
Operating cycle : (>10 million)
- White illuminated 24V AC/DC
- IP protection: IP68 per IEC 60529; IP69K per DIN 40050-9
- Mechanical shock : 75g per MIL STD 810G
- Vibration: 5-500Hz/9.4m/s² per IEC 60721
- Potting:Epoxy Resin Silicone Free

All Dimensions in: mm			Code:		TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale 3:1		Weight		
					THIS DRAWING IS VALID FOR THE PARTS AND SUBASSEMBLY ONLY. IT DOES NOT COVER ANY OTHER PARTS OR SUBASSEMBLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.		Material		BPSSN22PWFG3		
					XX ± 0.1 X ± 0.2 X ± 0.5 ANG ± 15%		Description				
					Name _____ Date _____						
2	13334	Change cable	Sasha	29.09.13	Engineer	Sasha	29.08.12	Cat.no 07225199			
1	13198	Update after lab tests	Sasha	26.05.13	Draftsman	Gabriel	29.08.12				
No	ECO	Description	Name	Date	Checked	Approval					
		Finish	IBS ELECTRONICS				Revision	Drawing no.			
Next assy							02	P54-03.00.00			
								Sheet 1 of 1			