


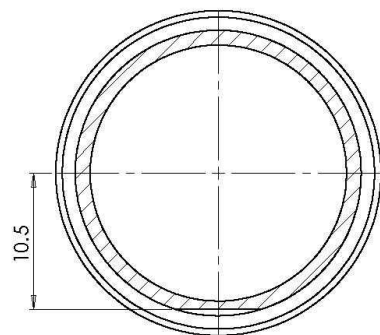


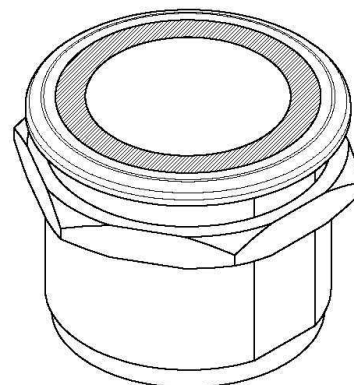

SECTION A-A
SCALE 3 : 1

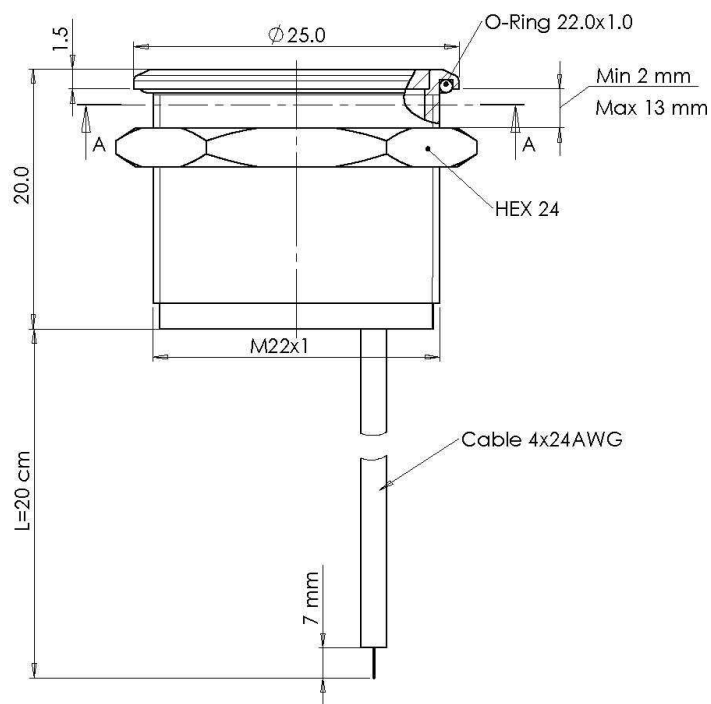

Manufactured by Stern Engineering
P/N 07225201
-Switch voltage 0-24 VAC/DC
-Switch current 1A
-Green illuminated 24V AC/DC



manufactured on: Date CE RoHS

NOTES:

1. Material: AL 6061
2. Green Anodize PER MIL-A-8625 Type II Class II
3. Rated Voltage: (0-24 V AC/DC)
Rated Current: max 1A
Switch Resistance "On": (<1 Ohm)
Switch Resistance "Off": (> 5 Megaohms)
Switch Capacitance : (100pF)
Overvoltage protection 34 V DC
Impulse Time : 300 mSEC
Actuation Force Typically : (3-5 N)
Climate data: -40C to +85C per MIL STD 810G
Operating cycle : (>10 million)
4. Green illuminated 24V AC/DC
5. IP protection: IP68 per IEC 60529; IP69K per DIN 40050-9
6. Mechanical shock : 75g per MIL STD 810G
7. Vibration: 5-500Hz/9.4m/s² per IEC 60721
8. Potting:Epoxy Resin Silicone Free

All Dimensions in: mm		Code:		TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale	Weight
				XXX ± 0.1		Material	
				XX ± 0.2		Description	
				X ± 0.5			
				ANG ± 1.5%			
				Name	Date		
				Engineer			
				Draftsman	Sasha	29.08.12	
1	13198	Update after lab tests	Sasha	26.05.13	Checked	Gabriel	29.08.12
No	ECO	Description	Name	Date	Approval		
		Finish	IBS ELECTRONICS			Revision	Drawing no.
						01	P73-04.00.00
						Sheet 1	of 1
							A3