

SPECIFICATION



Current Rating: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 2 S D A 1 5 - 2 X X X X N N X U - A B 000 - 0 0

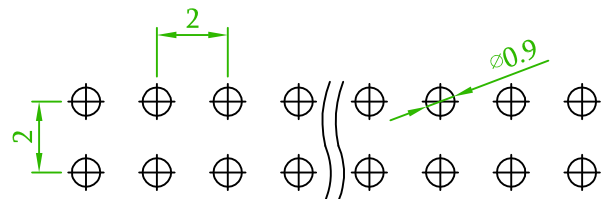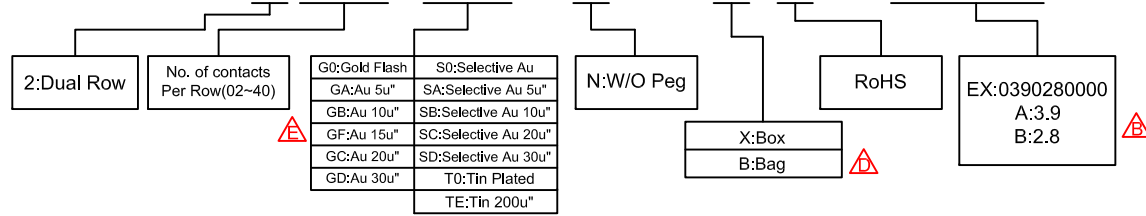

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

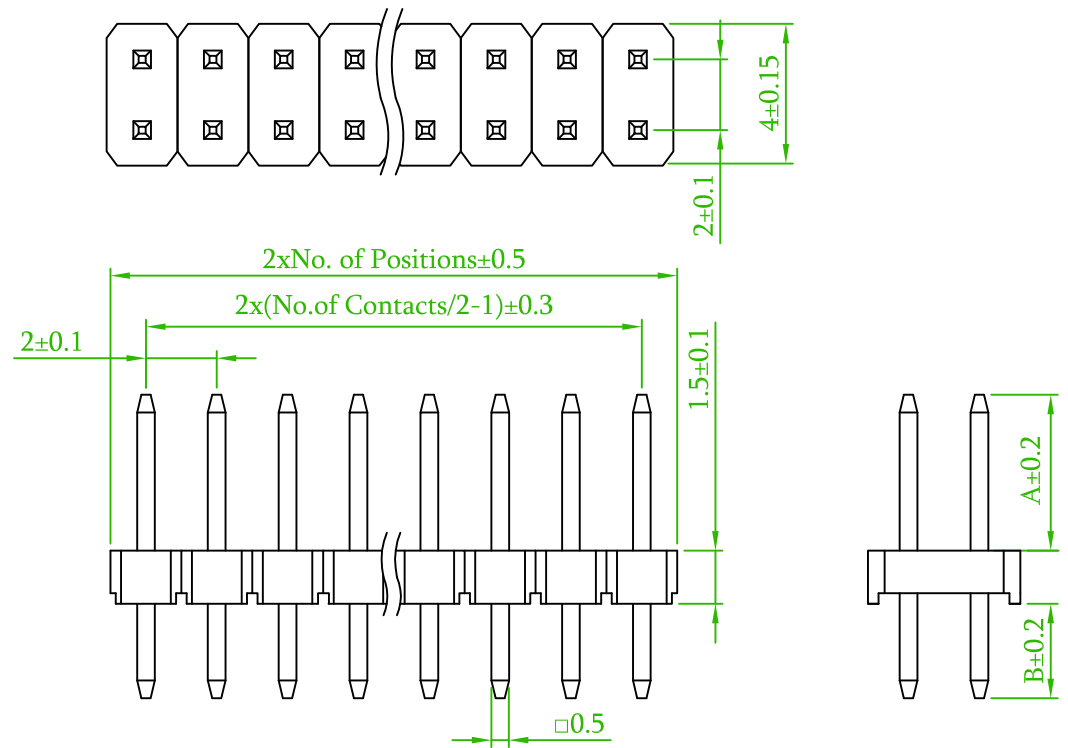

Old Part No. : PH2S15-2XX-U

△	Add the GF: Au 15u"	Benson	2019/11/05
△	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/22
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2SDA15-2XXXXNNU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/08
圖號 DRAWING NO.	GN016-GA241	版本 REV.	E	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		