

North America: Danboro, PA • E-mail: info@pemnet.com • Tel: +1-215-766-8853

Europe: Galway, Ireland • E-mail: europe@pemnet.com • Tel: +353-91-751714


Asia/Pacific: Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660
Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688

Part # BSOS-032-16, Blind Threaded Standoffs - Types BSO, BSOA, BSOS - Unified

These standoffs, which use the proven self-clinching design, install with a squeeze in properly sized round holes - and become permanently mounted in the thin sheet.

When blind-threaded types are used, outer sheet surfaces are not only flush, but closed as well.

If you require a standoff which we do not offer in this bulletin, please contact us. We will be happy to work with you to satisfy your special need.

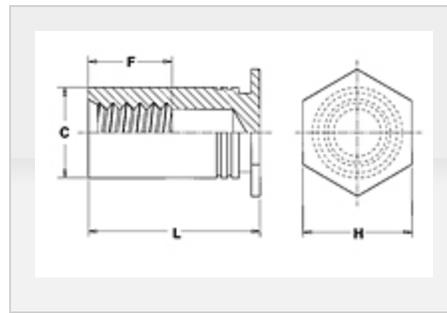


Specifications

Thread Size	.190-32 (#10-32)
Thread Code	032
Length Code	16
Material Code	S
Min. Sheet Thickness	.050 in
Hole Size in Sheet + .003 - .000	.281 in

C + .000 - .005

.280 in

**F Min.**

.250 in

H Nom.

.312 in

L - Length +.002 -.005

.500 in

Min. Dist. Hole C/L to Edge

.31 in

For Use in Sheet Hardness¹

HRB 70 / HB 125 or Less

Thread Specification

Internal, ANSI B1.1, 2B

Fastener Material

300 Series Stainless Steel

Standard Finish

Passivated and/or tested per ASTM A380

CAD Supplier

PennEngineering® (PEM®)

¹ HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.