




Aero-Space Computer Supplies, Inc.
 9270 Bryant Avenue South
 Minneapolis, MN 55420
Tel: 1.800.234.4725 • **Fax:** 952.884.5561
Email: sales@ascs.com

Part # BSOS-8632-16, Blind Threaded Standoffs - Types BSO, BSOA, BSOS - Unified

These standoffs, which use the proven self-clinching design, install with a squeeze in properly sized round holes - and become permanently mounted in the thin sheet.

When blind-threaded types are used, outer sheet surfaces are not only flush, but c

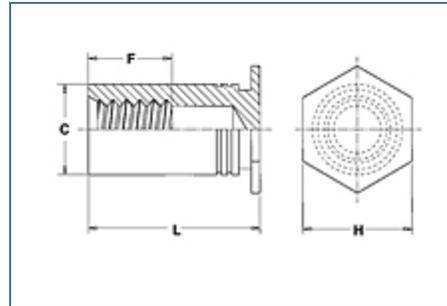

Specifications

Thread Size .138-32 (#6-32)

Thread Code 8632


Length Code 16

Material Code S

Min. Sheet Thickness .050 in

Hole Size in Sheet + .003 - .000 .281 in

C + .000 - .005 .280 in



F Min. .250 in

H Nom. .312 in

L - Length +.002 –.005	.500 in
Min. Dist. Hole C/L to Edge	.310 in
For Use in Sheet Hardness¹	HRB 70 / HB 125 or Less
Thread Specification	Internal, ANSI B1.1, 2B
Fastener Material	300 Series Stainless Steel
Standard Finish	Passivated and/or tested per ASTM A380
CAD Supplier	PennEngineering® (PEM®)

¹ HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.