

	Date	Initials	Comments
Rev. A	09/26/17	DRJ	ADD MAX/MIN TO TOLERANCES
Rev.			
Rev.			

CAPACITOR SPECIFICATIONS

Capacitance: 220 pF ± 20% at 1 Vrms, 1 kHz, 25°C

Dissipation Factor: 2.5% MAX at 1 Vrms, 1 kHz, 25°C

Rated Voltage: 25 KVDC

Insulation Resistance:


100,000 MΩ MIN at 25°C
10,000 MΩ MIN at 125°C

Dielectric Type: X7R

Operating Temperature Range: -55°C to 125°C

RoHS Compliant

ELWOOD P/N HV2527

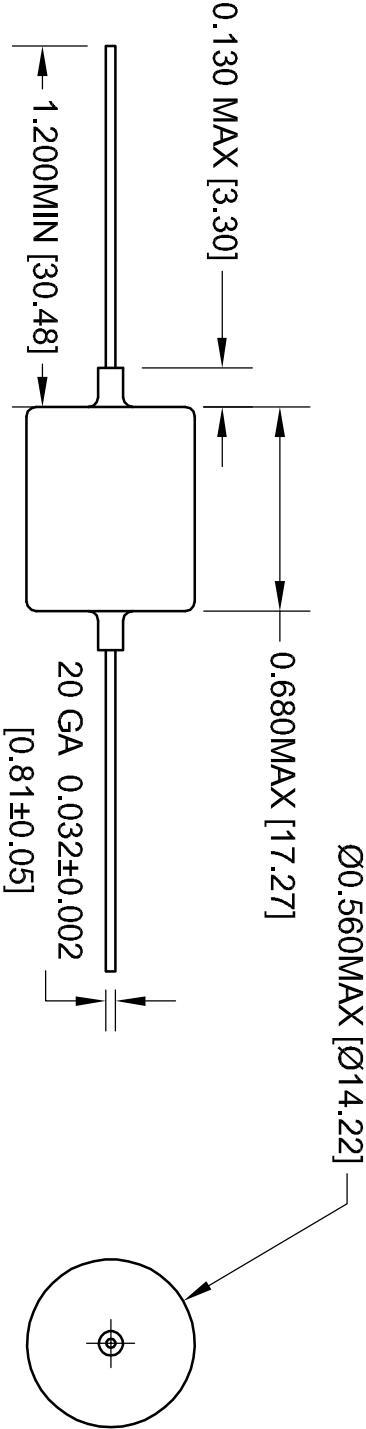

5462 Louie Lane Reno, NV 89511
(775) 851-3580 (775) 851-3582 (FAX)

Description D250D56X221MR/A
25KV, 220pF, X7R

Dwg. # 11373 Rev. A Drawn By DRJ