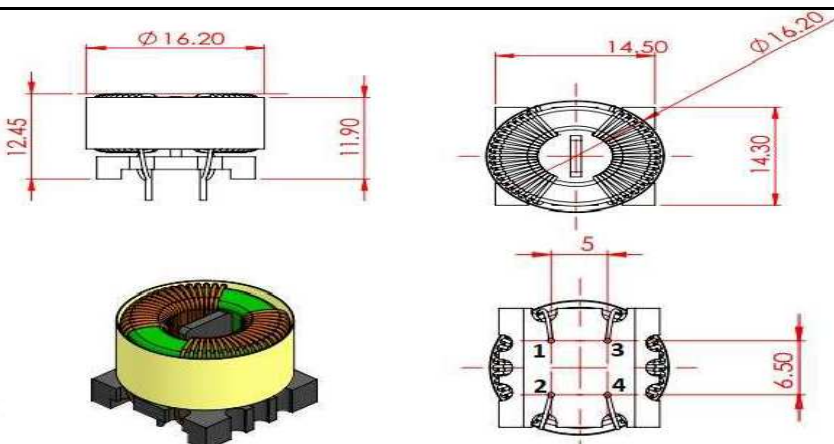


PRODUCTION SPECIFICATION

CUSTOMER	IBS	PRODUCTION	T14*9*5-C	DATE	12/10/2018	
(1) DIMENSION (UNIT: mm)				NO.	HJ-L1887	
				A	12MAX	
				B	9MAX	
				C	3.5 ± 0.5	
				D	13MAX	
				E	8± 0.5	
				F	5± 0.5	
3. ELECTRONIACS, WIRE&TURNS (AT:1KHZ 0. 25V)						
WINDING	START	FINISH	WIRE (mm)	TURN (TS)	INDUCTANCE	DCR (mΩ)
N1	1	2	Φ0.4*1C N 2UEW	58.5 REF	20mH MIN	220 MAX
N2	3	4	Φ0.4*1C N 2UEW	58.5 REF	20mH MIN	220 MAX
HI-POT			COIL-COIL		AC 500V/5mA/3S	
INSULATION RESLATANCE			COIL-COIL		DC 500V/100MOHM MIN	
测试仪器以同惠的HT2820, 华仪的HY-7112为标准或相当仪器 (The test equipment is Tonghui HT2820 and Huayi HY-7112 as standard or equivalent)						
4. MATERIAL						
ITEM	MATERIAL		SUPPLIER		UL	
CORE	T14*9*5-C		SHANGDONG KAITONG ELECTRON CO., LTD			
WIRE	Φ0.4 2UEW N		GUANGDONG JINYAN ELECTROTECHNICS JOINT STOCK CO.,LTD		E238500	
SN	SnCu		东莞市宝拓来有限公司 (Dongguan Baotuolai Co., Ltd)			
VRANISH	T4260		SUZHOU TAIHU ELECTRIC ADVANCED MATERIAL CO LTD		E228349	
BASE	T375J		CHANGCHUN PLASTICS CO LTD		E59481	
备注: 1. 成品须含浸 2. 无铅制程 3. 线圈绕制方式为分边绕 4. 线圈底部需加装底座 (如图所示)						

Remarks: 1. The finished product must be impregnated 2. Lead-free process

3. The coil winding method is split side winding

4. The bottom of the coil needs to be installed with a base (as shown in the figure)

APPROVER: 宋建平

CHECK: 宋丽霞

ADMIT: Tony

