

INDEX

Product Guide 2-32

1. Series of Capacitors	2
2. Series Chart of Capacitors	4
3. Industry Application	7
4. Part Number System	8
5. Lead Style & Taping Specification	
• Chip Type	10
• Radial Type	12
• Terminals Of Snap-In Type	16
• Screw Type	18
6. Usage Conditions	19

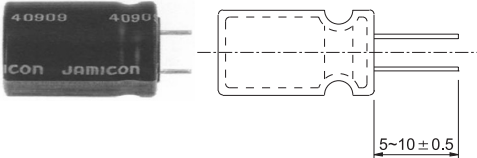
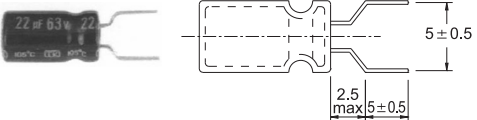
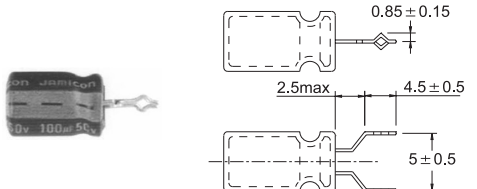
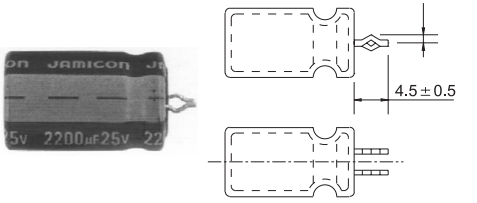
Conductive Polymer Aluminum Solid Capacitors 33-55

1. SMD.....	33
2. Radial Type.....	40

Aluminum Electrolytic Capacitors 56-226

1. Chip Type	56
2. Radial Type.....	87
3. Snap-In Type	166
4. Screw Type.....	198

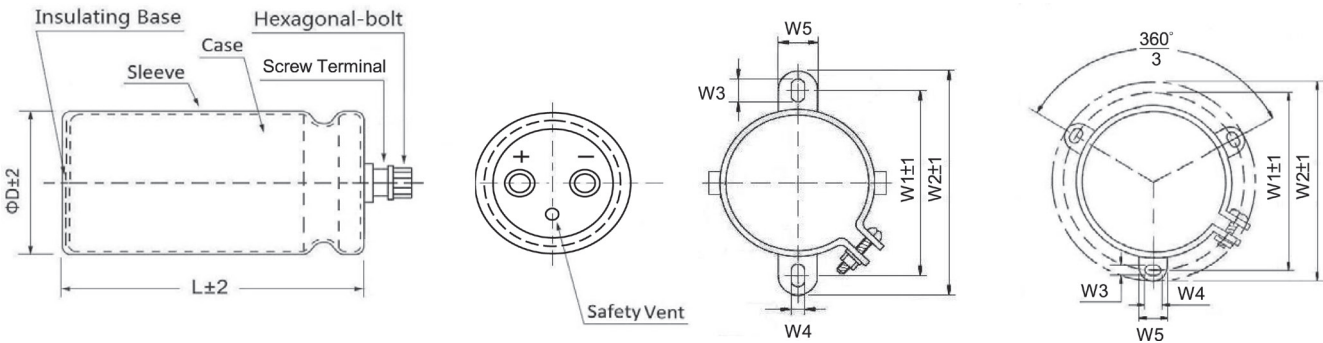
● Lead Style

Item List		Code	Lead Diameter (mm)	Case Size DxL(mm)	Range	Dimensions
Lead Style	Lead Cut	C*	0.5~0.8	5 x 11 } 18 x 40	$\phi 5 \sim \phi 18$	 5~10 ± 0.5
	Lead Forming Cut	FF	0.5~0.6	5 x 11 } 8 x 11.5	$\phi 5 \sim \phi 8$	 5 ± 0.5 2.5 max 5 ± 0.5
	Snap-in	F8	0.5~0.6	5 x 11 } 8 x 11.5	$\phi 5 \sim \phi 8$	 0.85 ± 0.15 2.5 max 4.5 ± 0.5 5 ± 0.5
		K2	0.6~0.8	10 x 12.5 } 18 x 40	$\phi 10 \sim \phi 18$	 1.0 ± 0.20 4.5 ± 0.5

- Screw type
- Dimensions (φ35~90)

φD	W1	W2	W3	W4	W5
35	48.0	58.0	6.0	3.5	10
51	63.5	73.0	5.0	7.0	14
64	76.2	85.1	5.0	7.0	14
77	88.9	98.4	5.0	7.0	14
90	101.6	111.1	5.0	7.0	14

(▲ φ35) (▲ φ51, φ64, φ77, φ90)



● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : mA(rms) 85°C 120Hz

μF	V(DC) Item	6.3		10		16		25		35		50	
		DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
1.0												4x5.4	7
2.2										4x5.4	10	5x5.4	12
3.3								5x5.4	13	5x5.4	14	5x5.4	14
4.7						4x5.4	14	5x5.4	16	5x5.4	17	6.3x5.4	19
10				4x5.4	19	5x5.4	23	6.3x5.4	27	6.3x5.4	28		
22		5x5.4	29	6.3x5.4	36	6.3x5.4	39						
33		6.3x5.4	41	6.3x5.4	45	6.3x5.4	48						
47		6.3x5.4	49										

