



Receiver




Transmitter

### Combo KVM Extender Benefits


- ▶ Remote console up to 150M
- ▶ Dual user access at remote site
- ▶ Pure hardware solution makes network independent
- ▶ No software required

Specification	Transmitter	Receiver
<b>Console Port</b>	1 x DB-15 VGA, up to 1600 x 1200 2 x USB connector for KB & mouse	1 x DB-15 VGA, up to 1600 x 1200 2 x USB connector for KB & mouse
<b>Remote I / O</b>	1 x RJ-45, connect the receiver up to 150 meter via Cat5/6 cable	1 x RJ-45, connect the receiver up to 150 meter via Cat5/6 cable
<b>Local computer</b>	1 x DB-15 combo KVM port	1 x DB-15 combo KVM port
<b>LED</b>	Power ( red ) & Status ( blue )	Local & Remote ( blue )
<b>Power</b>	From attached local computer or optional 12V power adapter	12V power adapter
<b>Operation Temperature</b>	0 ~ 50 °C	0 ~ 50 °C
<b>Storage Temperature</b>	-20 ~ 60 °C	-20 ~ 60 °C
<b>Humidity</b>	0~80%, Non-Condensing	0~80%, Non-Condensing
<b>Dimension</b>	157.8 x 70 x 30.6 mm	157.8 x 70 x 30.6 mm
<b>Weight</b>	370g	370g

### Application < I > - Extending the KVM console port to 150 meters

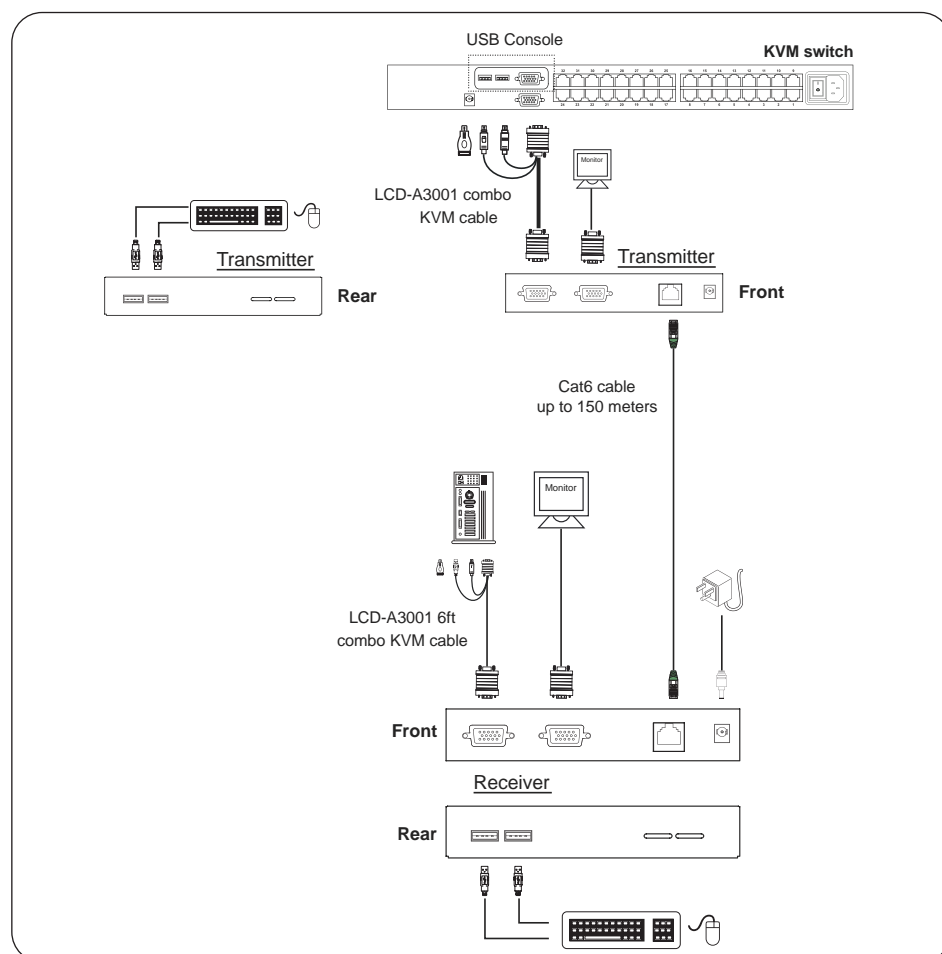

## Application &lt; II &gt; - Extending the computer to KVM port to 150 meters

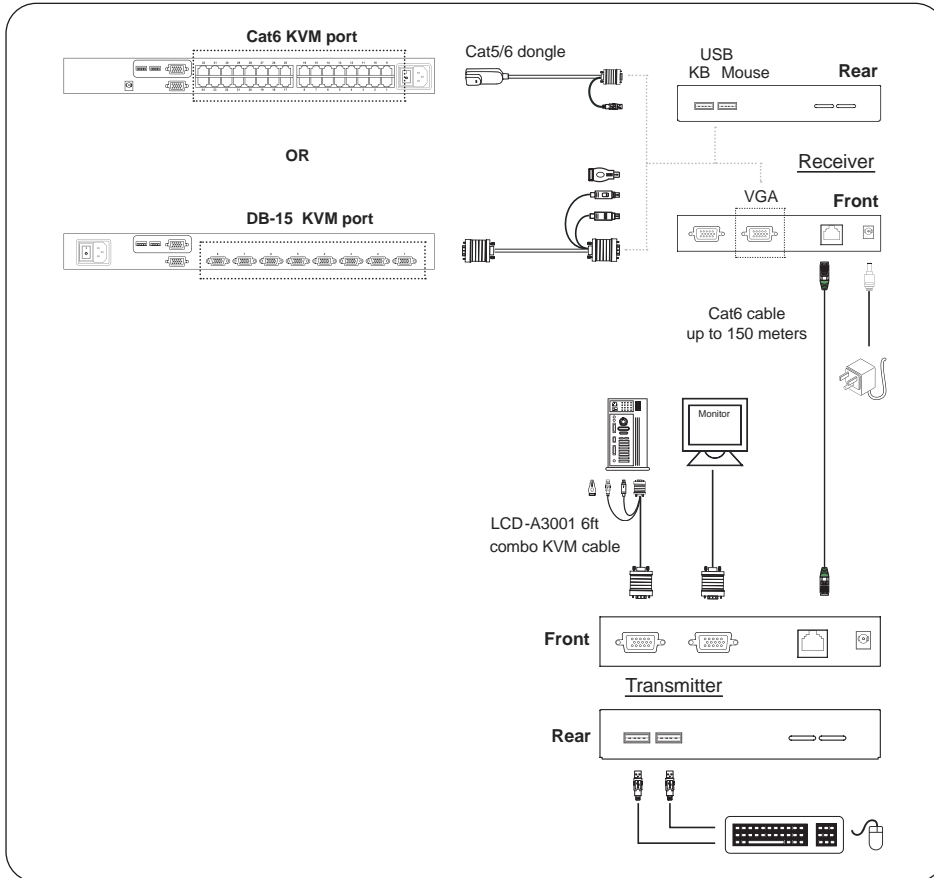

 For detailed product specifications and options, please download the user manual from product link.

## Application &lt; III &gt; - Extending the computer up to 150 meters

