



7809

Shenzhen yecheng technology industry co.,ltd

Three-terminal positive voltage regulator

FEATURES**Maximum output current I_{OM} : 1.5 A****Output voltage V_o : 9 V****Continuous total dissipation** **$P_D: 1.5 \text{ W } (T_a = 25^\circ\text{C})$** **$15 \text{ W } (T_c = 25^\circ\text{C})$** **TO-220**

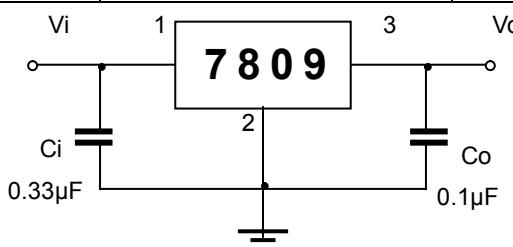
- 1.IN
- 2.GND
- 3.OUT

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.3	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE (Vi=16V, Io=500mA,Ci=0.33μF,Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	Vo	25°C	8.65	9	9.35	V	
		11.5V≤Vi≤24V, Io= 5mA-1A, P≤15W	0-125°C	8.55	9	9.45	V
Load Regulation	ΔVo	Io=5mA-1.5A	25°C		12	180	mV
		Io=250mA-750mA	25°C		4	90	mV
Line regulation	ΔVo	11.5V≤Vi≤27V	25°C		7	180	mV
		13V≤Vi≤19V	25°C		2	90	mV
Quiescent Current Quiescent Current Change	Iq ΔIq	11.5V≤Vi≤27V	0-25°C		4.3	8	mA
		5mA≤Iq≤1A	0-125°C			0.5	mA
Output voltage drift	△Vo/△T	Io=5mA	0-125°C		-1		mV/°C
Output Noise Voltage	VN	10Hz≤f≤100KHz	25°C		60		uV
Ripple Rejection	RR	12V≤Vi≤22V,f=120Hz	0-125°C	55	70		dB
Dropout Voltage	Vd	Io=1A	25°C		2		V
Output resistance	Ro	f=1KHz	25°C		18		mΩ
Short Circuit Current	Isc		25°C		400		mA
Peak Current	Ipk		25°C		2.2		A

TYPICAL APPLICATION



7809

Shenzhen yecheng technology industry co.,ltd

Three-terminal positive voltage regulator

