


CF25 Series 1.00mm(.039")H=2.20 SMT ZIF One-Touch FFC/FPC Connectors





- ⊙ 2.2mm above the board
- ⊙ FFC/FPC zero insertion force and high retention force
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ Cover: High temperature plastic UL 94V-0, Color Black
- ⊙ Actuator designed easy for FFC/FPC installation and reliable operation
- ⊙ With metal fixed tabs to secure connector in place





RoHS Compliant

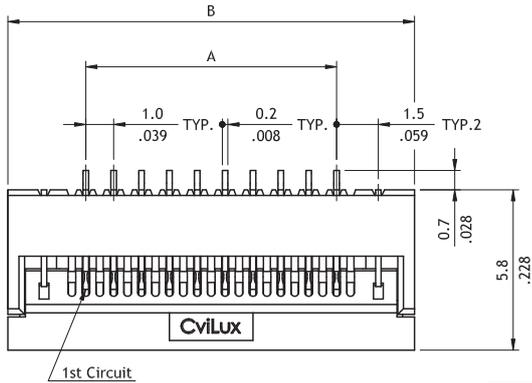

A = 1.0 x No. of Spaces
 B = A + 5.6
 C = A + 2.1

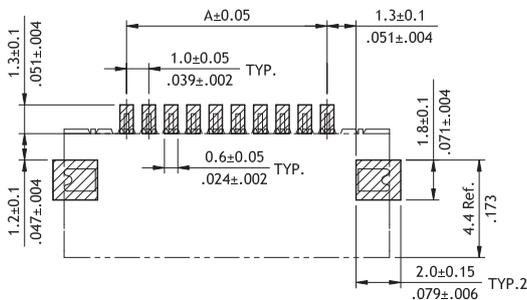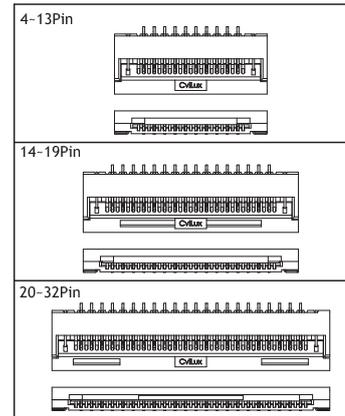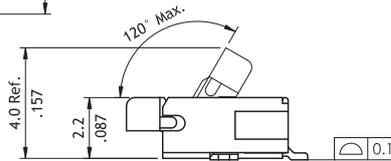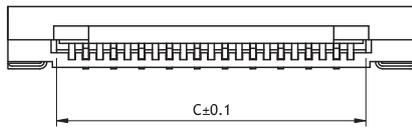

Recommended PCB Layout

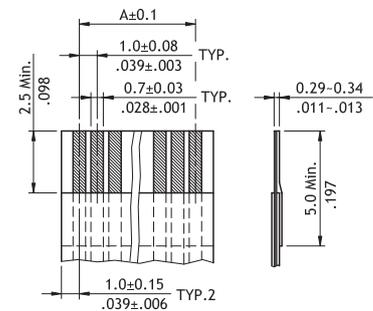

Accommodated FFC/FPC

Ordering Code

①	②	③	④	⑤	⑥	⑦	⑧	⑨
CF	25	32	1	D	0	R	0	- 10 - NH

- ① Series No.
- ② No. of Circuits: 04 to 32
Circuits not found above please consult manufacturer
- ③ Plating Code:
1 = Matte Tin over Nickel
F = Selective Gold flash over Nickel

- ④ Contact Style:
D = Downside Contact
- ⑤ Color: 0 = Nature
- ⑥ Packing:
R = Tape & Reel
T = Tube

- ⑦ Other Options:
0 = Standard
*Special option consult manufacturer
- ⑧ Pitch: 10 = 1.00 mm
- ⑨ Process: -NH = For Lead Free IR process and Halogen-Free