

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon



WT

Chip Type, Wide Temperature Range

series




- Chip type operating over wide temperature range of to -55 to $+105^{\circ}\text{C}$.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

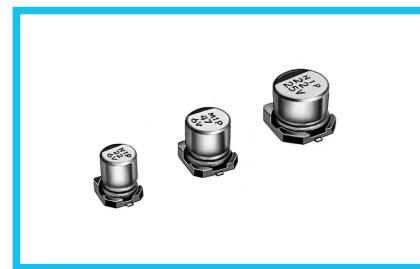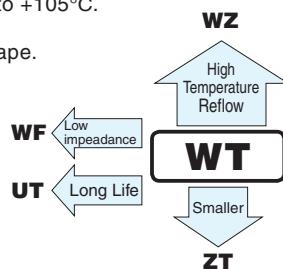


■ Specifications

Item	Performance Characteristics																																	
Category Temperature Range	-55 to $+105^{\circ}\text{C}$																																	
Rated Voltage Range	4 to 50V																																	
Rated Capacitance Range	0.1 to 1500 μF																																	
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																																	
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																																	
Tangent of loss angle ($\tan \delta$)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th><th>4</th><th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th></tr> </thead> <tbody> <tr> <td>$\tan \delta$ (MAX.)</td><td>0.40</td><td>0.30</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.14</td></tr> </tbody> </table>							Rated voltage (V)	4	6.3	10	16	25	35	50	$\tan \delta$ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14											
Rated voltage (V)	4	6.3	10	16	25	35	50																											
$\tan \delta$ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14																											
Stability at Low Temperature	<table border="1"> <thead> <tr> <th colspan="2">Rated voltage (V)</th><th>4</th><th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th></tr> </thead> <tbody> <tr> <td>Impedance ratio</td><td>Z-25°C / Z+20°C</td><td>7</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr> <tr> <td>ZT / Z20 (MAX.)</td><td>Z-40°C / Z+20°C</td><td>15</td><td>8</td><td>8</td><td>4</td><td>4</td><td>3</td><td>3</td></tr> </tbody> </table>							Rated voltage (V)		4	6.3	10	16	25	35	50	Impedance ratio	Z-25°C / Z+20°C	7	4	3	2	2	2	2	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	15	8	8	4	4	3	3
Rated voltage (V)		4	6.3	10	16	25	35	50																										
Impedance ratio	Z-25°C / Z+20°C	7	4	3	2	2	2	2																										
ZT / Z20 (MAX.)	Z-40°C / Z+20°C	15	8	8	4	4	3	3																										
Endurance	<table border="1"> <tr> <td>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.</td> <td>Capacitance change</td><td>Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less.</td></tr> <tr> <td></td><td>$\tan \delta$</td><td>Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.</td></tr> <tr> <td></td><td>Leakage current</td><td>200% or less than the initial specified value</td></tr> </table>							The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C .	Capacitance change	Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less.		$\tan \delta$	Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.		Leakage current	200% or less than the initial specified value																		
The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C .	Capacitance change	Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less.																																
	$\tan \delta$	Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.																																
	Leakage current	200% or less than the initial specified value																																
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C , they shall meet the specified values for the endurance characteristics listed above.																																	
Resistance to soldering heat	<table border="1"> <tr> <td>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</td> <td>Capacitance change</td><td>Within $\pm 10\%$ of the initial capacitance value</td></tr> <tr> <td></td><td>$\tan \delta$</td><td>Less than or equal to the initial specified value</td></tr> <tr> <td></td><td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table>							The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C . The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C .	Capacitance change	Within $\pm 10\%$ of the initial capacitance value		$\tan \delta$	Less than or equal to the initial specified value		Leakage current	Less than or equal to the initial specified value																		
The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C . The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C .	Capacitance change	Within $\pm 10\%$ of the initial capacitance value																																
	$\tan \delta$	Less than or equal to the initial specified value																																
	Leakage current	Less than or equal to the initial specified value																																
Marking	Black print on the case top.																																	

■ Chip Type

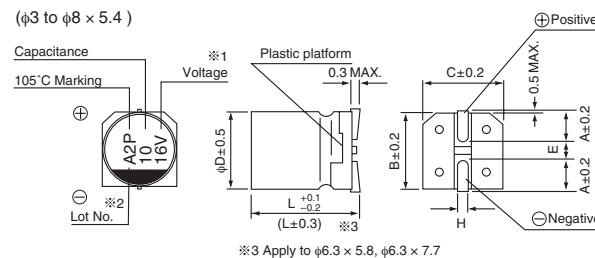


※3 Apply to $\phi 6.3 \times 5.8$, $\phi 6.3 \times 7.7$

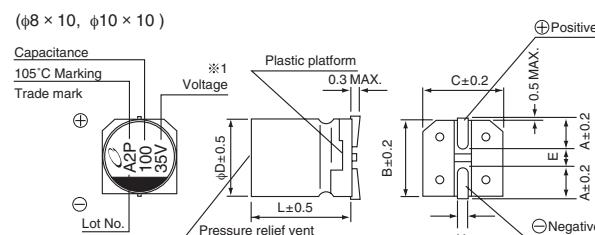

※1. Voltage mark for 6.3V is [6V]. In case of marking for $\phi 3$ units, "V" for rated voltage is omitted.

※2. In case of marking for $\phi 3$ units. Lot No is expressed by a digit (month code).

Type numbering system (Example : 16V 10μF)

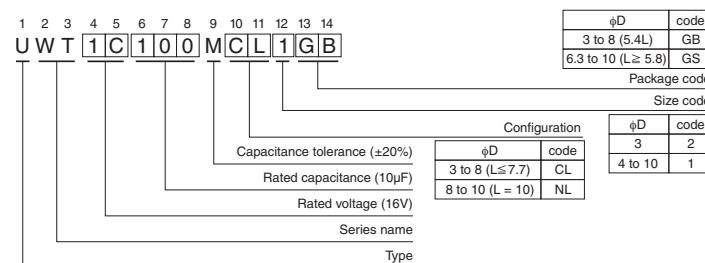

(mm)	$\phi D \times L$	3 × 5.4	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 5.8	6.3 × 7.7	8 × 5.4	8 × 10	10 × 10
A	1.5	1.8	2.1	2.4	2.4	2.4	2.4	3.3	2.9	3.2
B	3.3	4.3	5.3	6.6	6.6	6.6	6.6	8.3	8.3	10.3
C	3.3	4.3	5.3	6.6	6.6	6.6	6.6	8.3	8.3	10.3
E	0.8	1.0	1.3	2.2	2.2	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	5.4	5.4	5.8	7.7	5.4	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

● Dimension table in next page.

CAT.8100D

■ Dimensions

Cap. (μF)	V	Code	4	6.3	10	16	25	35	50
			0G	0J	1A	1C	1E	1V	1H
0.1	OR1								4 × 5.4 (3) 1.0
0.22	R22								4 × 5.4 (3) 2.6
0.33	R33								4 × 5.4 (3) 3.2
0.47	R47								4 × 5.4 (3) 3.8
1	010								4 × 5.4 (3) 6.3(5.9)
2.2	2R2						3 × 5.4	7.5	4 × 5.4 (3) 11 (9)
3.3	3R3						3 × 5.4	9	4 × 5.4 14
4.7	4R7					4 × 5.4 (3) 13 (10)	4 × 5.4	15	5 × 5.4 19
10	100				4 × 5.4 (3) 18 (14)	5 × 5.4	23	5 × 5.4	25 6.3 × 5.4 30
22	220	4 × 5.4	22	4 × 5.4	22	5 × 5.4	27	5 × 5.4	30 6.3 × 5.4 42 • 8 × 5.4 51(45)
33	330	5 × 5.4	30	5 × 5.4	30	5 × 5.4	35	6.3 × 5.4	40 6.3 × 5.4 48 • 8 × 5.4 59 (52) 6.3 × 7.7 60
47	470	5 × 5.4	36	5 × 5.4	36	6.3 × 5.4	46	6.3 × 5.4	50 • 8 × 5.4 66 (59) 6.3 × 5.8 63 6.3 × 7.7 63
100	101	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60 6.3 × 7.7 91 6.3 × 7.7 84 8 × 10 140
150	151	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 7.7	95 8 × 10 140 8 × 10 155 10 × 10 180
220	221	• 8 × 5.4	102 (91)	• 8 × 5.4	102 (91)	6.3 × 7.7	105	6.3 × 7.7	105 8 × 10 155 8 × 10 190 10 × 10 220
330	331	6.3 × 7.7	105	6.3 × 7.7	105	8 × 10	195	8 × 10	195 8 × 10 190 10 × 10 300
470	471	8 × 10	210	8 × 10	210	8 × 10	210	8 × 10	230 10 × 10 300
680	681	8 × 10	210	8 × 10	210	10 × 10	310	10 × 10	310
1000	102	8 × 10	230	8 × 10	230	10 × 10	310		
1500	152	10 × 10	310	10 × 10	310				Case size Φ D × L (mm) Rated ripple

Rated ripple current (mA rms) at 105°C 120Hz

() is also available with φ3mm upon request. In such a case, [2] will be put at 12th digit of type numbering system.

Size φ6.3 × 5.8 is available for capacitors marked. " • " In such a case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UX(p.154), UJ(p.160) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.