
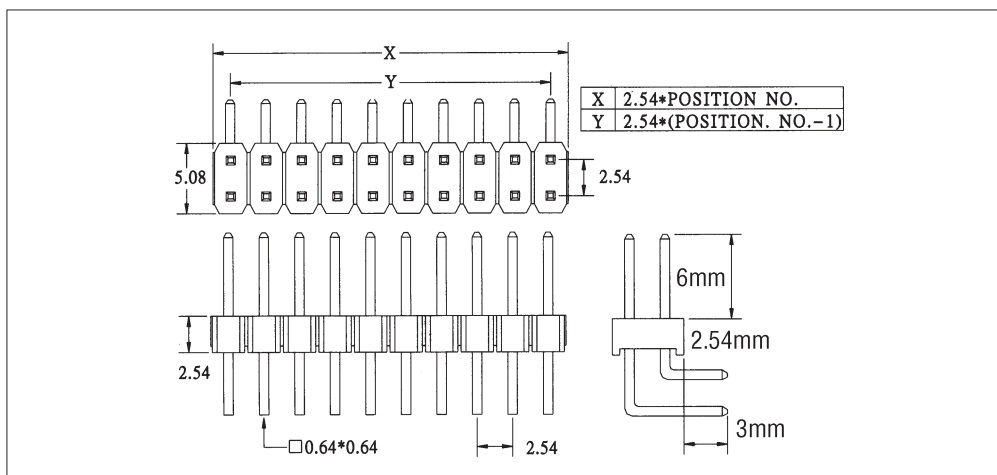



2.54mm Pitch Dual Row Through Board Right Angle PCB Mount Header THD-xx-R-RA Series

2.54mm Pin Pitch & 2.54mm Cross Pitch
Gold Flash Plated Contacts
From 2x2 to 2x40 Positions

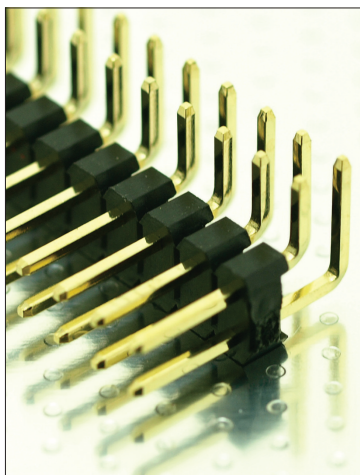

Specification for THD-xx-R-RA Series

Contact Material:	Brass
Contact Plating:	Gold Flash Plated
Body:	PBT UL94V-0 Rated Black
Rated Current:	3A - DWV - AC500V
Insulation Resistance:	5000 MΩ Max.
Operating Temperature:	-40°C to +105°C

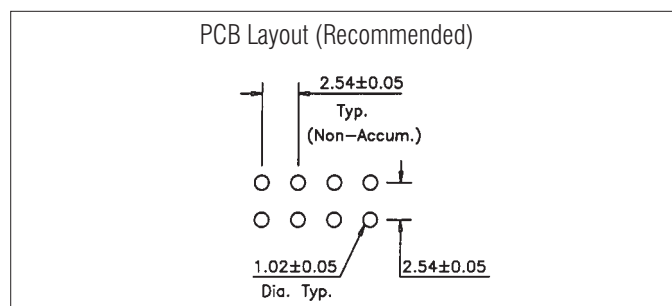

Ordering Information for THD-xx-R-RA Series

THD - xx- R-RA
1

Option 1 *Number of Positions per row*
02 = 2x2 to
40 = 2x40

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities.