




圆形裸端子 Non-insulated ring terminal

Terminal Material: copper(紫铜)
Brazed Seam(有焊接)
Plating: Tin(镀锡)

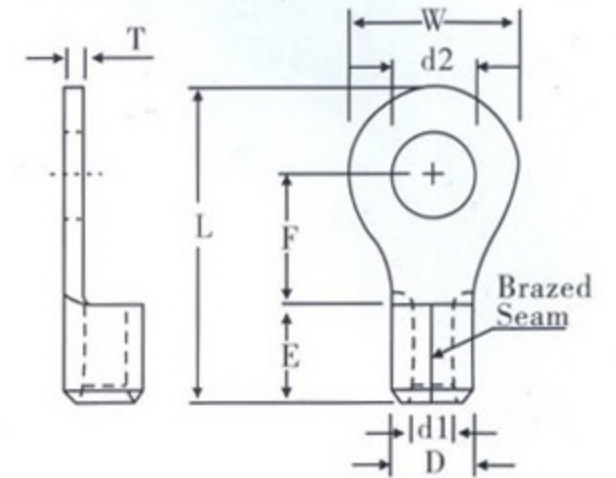

ITEM NO 型 号	USA Screw 美制螺栓号	Screw dia 螺栓口直径 d2(mm)	Dimension尺寸(mm)							WIPR RANGE AWG/mm ²	Plating
			W	F	L	E	D	d	T		
RNB1.25-3	#4	3.2	5.7	4.95	12.6	4.8	3.4	1.7	0.75	22~16AWG 0.5~1.2mm ² 19A	Tin
RNB1.25-3.5S	#6	3.7	5.7	4.95	12.6						
RNB1.25-3.5M	#6	3.7	6.6	6.3	14.4						
RNB1.25-3.5L	#6	3.7	8.0	7.0	15.8						
RNB1.25-4S	#8	4.3	6.6	6.3	14.4						
RNB1.25-4L	#8	4.3	8.0	7.0	15.8						
RNB1.25-5	#10	5.3	8.0	7.0	15.8						
RNB1.25-5L	#10	5.3	9.8	8.5	18.0						
RNB1.25-6	1/4	6.4	11.6	11.1	21.8						
RNB1.25-8	5/16	8.4	11.6	11.1	21.8						
RNB1.25-10	3/8	10.5	13.6	13.9	25.5						
RNB1.25-12	1/2	13.0	19.2	16.5	31.0						
RNB2-3	#4	3.2	6.6	4.3	12.3	4.8	4.1	2.3	0.8	16~14AWG 1.5~2.5mm ² 27A	
RNB2-3.5S	#6	3.7	6.6	4.3	12.3						
RNB2-3.5M	#6	3.7	6.6	7.0	16.0						
RNB2-3.5L	#6	3.7	8.5	7.75	16.8						
RNB2-4S	#8	4.3	6.6	7.0	16.0						
RNB2-4L	#8	4.3	8.5	7.75	16.8						
RNB2-5S	#10	5.3	8.5	7.75	16.8						
RNB2-5L	#10	5.3	9.5	7.25	16.8						
RNB2-6	1/4	6.4	12.0	11.0	21.8						
RNB2-8	5/16	8.4	12.0	11.0	21.8						
RNB2-10	3/8	10.5	13.6	13.9	25.5						
RNB2-12	1/2	13.0	19.2	16.5	31.0						
RNB3.5-4	#8	4.3	8.0	7.7	18.0	6.0	5.0	3.0	1.0	14~12AWG 2.5~4mm ² 37A	
RNB3.5-5S	#10	5.3	8.0	7.7	18.0						
RNB3.5-5L	#10	5.3	12.0	7.7	21.4						
RNB3.5-6	1/4	6.4	12.0	7.7	21.4						