


1 2 3 4 5 6 7 8 9

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

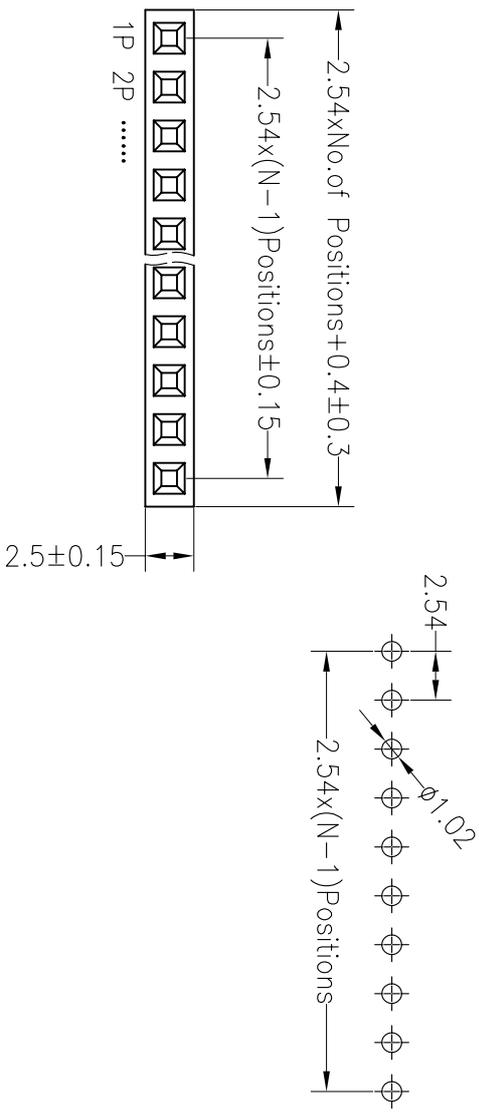

Ordering Information

2285-01 XX X N XX S Y 01

No. of Pins Per Row: 1*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

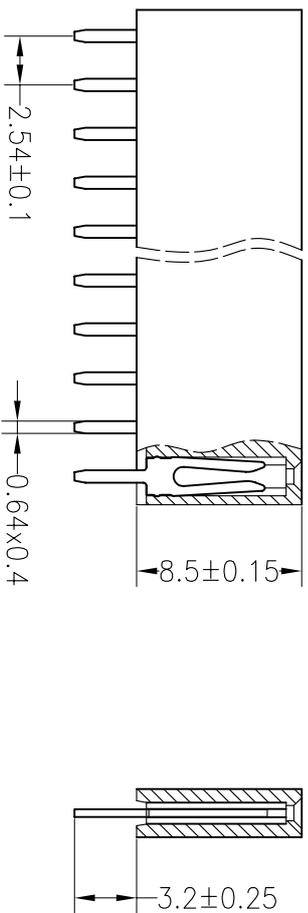

上海爱默电子科技有限公司

PART NO. 2285-01XXXXXXSY01

TITLE: 2.54PF H8.5mm 1xNpin 180° W2.5mm

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	YYuSheng	12.03.28	UNIT	mm	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1		
X.XXX	±0.10			PROJ.	◆		
Angle	±3°	APPROVE					
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			