



Marvell® Link Street® -88E6341

6 Port Ethernet Switch with 2500Base-X SerDes
and Four 10/100/1000Mbps PHYs




PRODUCT OVERVIEW

The Marvell® Link Street® -88E6341 device is single-chip, 6-Port Ethernet Switch with four integrated 10/100/1000Mbps Ethernet transceivers and one high speed SerDes interfaces supporting 2500-BaseX, 1000Base-X, and SGMII. The device also includes an integrated 200MHz microprocessor with 60Kbytes of internal memory to enable smart or lightly managed switches without the need of an external CPU.

The 88E6341 provides advanced QoS features with 4 egress queues. The high performance switch fabric provides line rate switching on all ports simultaneously while providing advanced switch functionality. The device includes a 128 entry TCAM to enable flexible switch policing, including Access Control Lists (ACLs) and Policy Control Lists (PCLs). The 88E6341 also supports the latest IEEE 802.1 Audio Video Bridging (AVB) and Time Sensitive Networking (TSN) standards. These new standards overcome the latency and bandwidth limitations of Ethernet to allow for the efficient transmission of real-time content for home, commercial, and industrial applications. These devices use the AVB/TSN technologies to identify and reserve the network resources for AVB/TSN traffic streams and supports precise isochronous streaming capability for reliable and quality audio/video transmission over Ethernet for today's real-time, high definition information and entertainment options. The AVB/TSN protocols enable timing sensitive streams (such as digital video, audio, or industrial control traffic) to be sent over the Ethernet network with low latency and robust quality of Service guarantees.

BLOCK DIAGRAM

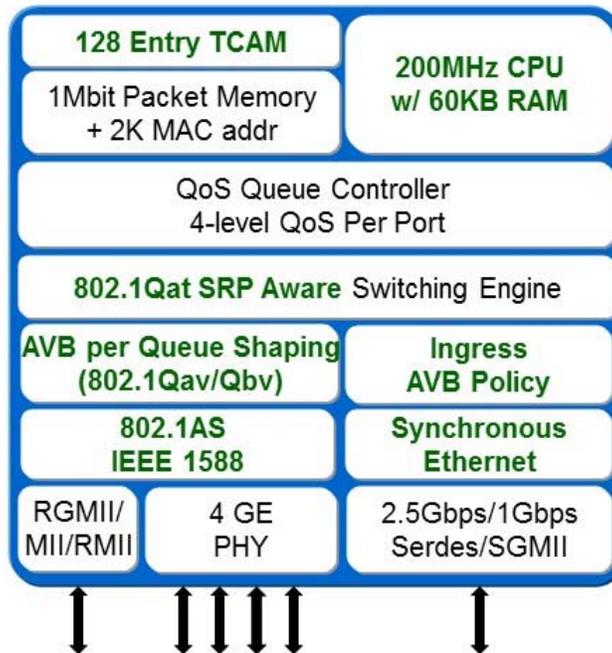

APPLICATIONS

- **Broadband Gateways** – 2.5Gbps SerDes uplink provides bandwidth the latest high speed broadband technologies
- **Wireless Routers** — Energy Efficient Ethernet PHYs provide aggressive power savings with 2.5Gbps uplink to support 802.11ac data rates
- **Industrial Switches** – Synchronous Ethernet, IEEE 1588v2, and 802.1 TSN support enable timing critical industrial networks



SPECIAL FEATURES	BENEFITS
<ul style="list-style-type: none"> High performance, non-blocking, 6-port Ethernet Switch fabricated on 40nm process, integrating: <ul style="list-style-type: none"> Four 10/100/1000Mbps PHYs with Advanced Virtual Cable Tester (VCT) diagnostic features One 2.5Gbps/1Gbps SerDes One RGMII/MII/RMII interface Packaged in 88-pin QFN package (10x10mm) 	<ul style="list-style-type: none"> Provides a complete Gigabit Ethernet switching solution for SOHO routers and gateways. The 2.5Gbps interface provides non-blocking uplink for latest DOCSIS and PON solutions. Energy Efficient Ethernet PHYs reduce power consumption while VCT provides qualitative cable-plant diagnosis, lowering OpEx
<ul style="list-style-type: none"> Integrated 200MHz microprocessor <ul style="list-style-type: none"> Includes 60Kbytes integrated memory 	<ul style="list-style-type: none"> Enables managed switch designs with the addition of a low cost EEPROM
<ul style="list-style-type: none"> Supports IEEE 1588v2 PTP Cut-through switch fabric for low latency applications Synchronous Ethernet for 1000Base-T or 100Base-TX 	<ul style="list-style-type: none"> Advanced timing features support clock synchronization and reduced latency for time sensitive content
<ul style="list-style-type: none"> 128 Entry TCAM for Deep Packet Inspection <ul style="list-style-type: none"> Looks up to 48 or 96 bytes deep into a frame 	<ul style="list-style-type: none"> Enables intelligent switching and policing of packets by looking beyond Layer 2 packet information
<ul style="list-style-type: none"> Supports 802.1 Audio Video Bridging (AVB) and Time Sensitive Networking (TSN) Standards <ul style="list-style-type: none"> 802.1AS – Precise Timing Protocols 802.1Qat – Stream Reservation Protocol 802.1Qav – Egress Pacing and Jitter Shaping 802.1Qbv – Time Aware Shaping 	<ul style="list-style-type: none"> Provides the latency, bandwidth and Quality of Service guarantees required to deliver today's multimedia entertainment and information over the Ethernet network.
<ul style="list-style-type: none"> Quality of Service (QoS) support with 4 traffic classes <ul style="list-style-type: none"> QoS determined by 802.1p, port, Source or Destination MAC address, 802.1Q VLAN ID, Frame Type (e.g., ARP, Ethertype, etc.), IPv4 Type of Service (TOS), Differentiated Service (DiffServ), or IPv6 Traffic Class 	<ul style="list-style-type: none"> Best in Class QoS features enable prioritization of all types of traffic (e.g. video, voice, data) to ensure efficient use of network bandwidth. Provides guaranteed delivery of time-sensitive Audio/Video content when used in conjunction with AVB standards.
<ul style="list-style-type: none"> Advanced Features <ul style="list-style-type: none"> High performance switch fabric with support for up to 2K MAC addresses Supports 10KByte Jumbo Frames Best in class per port ingress rate limiting and broadcast storm prevention (5 rate limiters per port) Per port egress rate shaping Three LEDs per port 	<ul style="list-style-type: none"> Provides high-speed, non-blocking, Gigabit performance for cost sensitive consumer applications. Advanced rate limiting, egress shaping and storm prevention improve traffic management and network performance, and reduce unwanted flooding of ports. Glueless interface for up to 16 LEDs including special LED functions, including WAN or LAN link/activity indication by combining the link/activity indication of 1 or more ports to a single LED function.
<ul style="list-style-type: none"> Management and Security: <ul style="list-style-type: none"> Supports 4096 802.1Q VLANs Supports 802.1D/s/w Spanning Tree Protocols IPv4 IGMP and IPv6 MLD snooping 802.1x MAC Authentication Remote (In-band) Management 	<ul style="list-style-type: none"> Built-in network management and security features, support fully managed switches and truly isolated WAN vs. LAN firewall applications. The device supports 4096 802.1Q VLAN IDs, which can be enabled on a per port basis. Three levels of 802.1Q security is supported with error framed trapping and logging.

THE MARVELL ADVANTAGE: Marvell products come with complete reference designs which include board layout designs, software, manufacturing diagnostic tools, documentation, and other items to assist customers with product evaluation and production. Marvell's worldwide field application engineers collaborate closely with end customers to develop and deliver new leading-edge products for quick time-to-market. Marvell utilizes world leading semiconductor foundry and packaging services to reliably deliver high-volume and low-cost total solutions.

ABOUT MARVELL: Marvell is a leader in storage, communications and consumer silicon solutions. Marvell's diverse product portfolio includes switching, transceiver, communications controller, processors, wireless, power management and storage solutions that power the entire communications infrastructure, including enterprise, metro, home, storage, and digital entertainment solutions. For more information, visit our website at www.marvell.com.

<p>Marvell Semiconductor, Inc. 5488 Marvell Lane Santa Clara, CA 95054</p> <p>Phone 408.222.2500 www.marvell.com</p>	<p>Copyright © 2007. Marvell International Ltd. All rights reserved. Marvell, the Marvell logo, Moving Forward Faster, Alaska, Datacom Systems on Silicon, Fastwriter, Libertas, Link Street, NetGX, PHYAdvantage, Presteria, Raising The Technology Bar, The Technology Within, Virtual Cable Tester, and Yukon are registered trademarks of Marvell. Marvell Makes It All Possible, Ants, AnyVoltage, Discovery, DSP Switcher, Feroceon, GalNet, GalTis, Horizon, RADLAN, UniMAC, and VCT are trademarks of Marvell. All other trademarks are the property of their respective owners.</p> <p>x/06</p>
---	--