

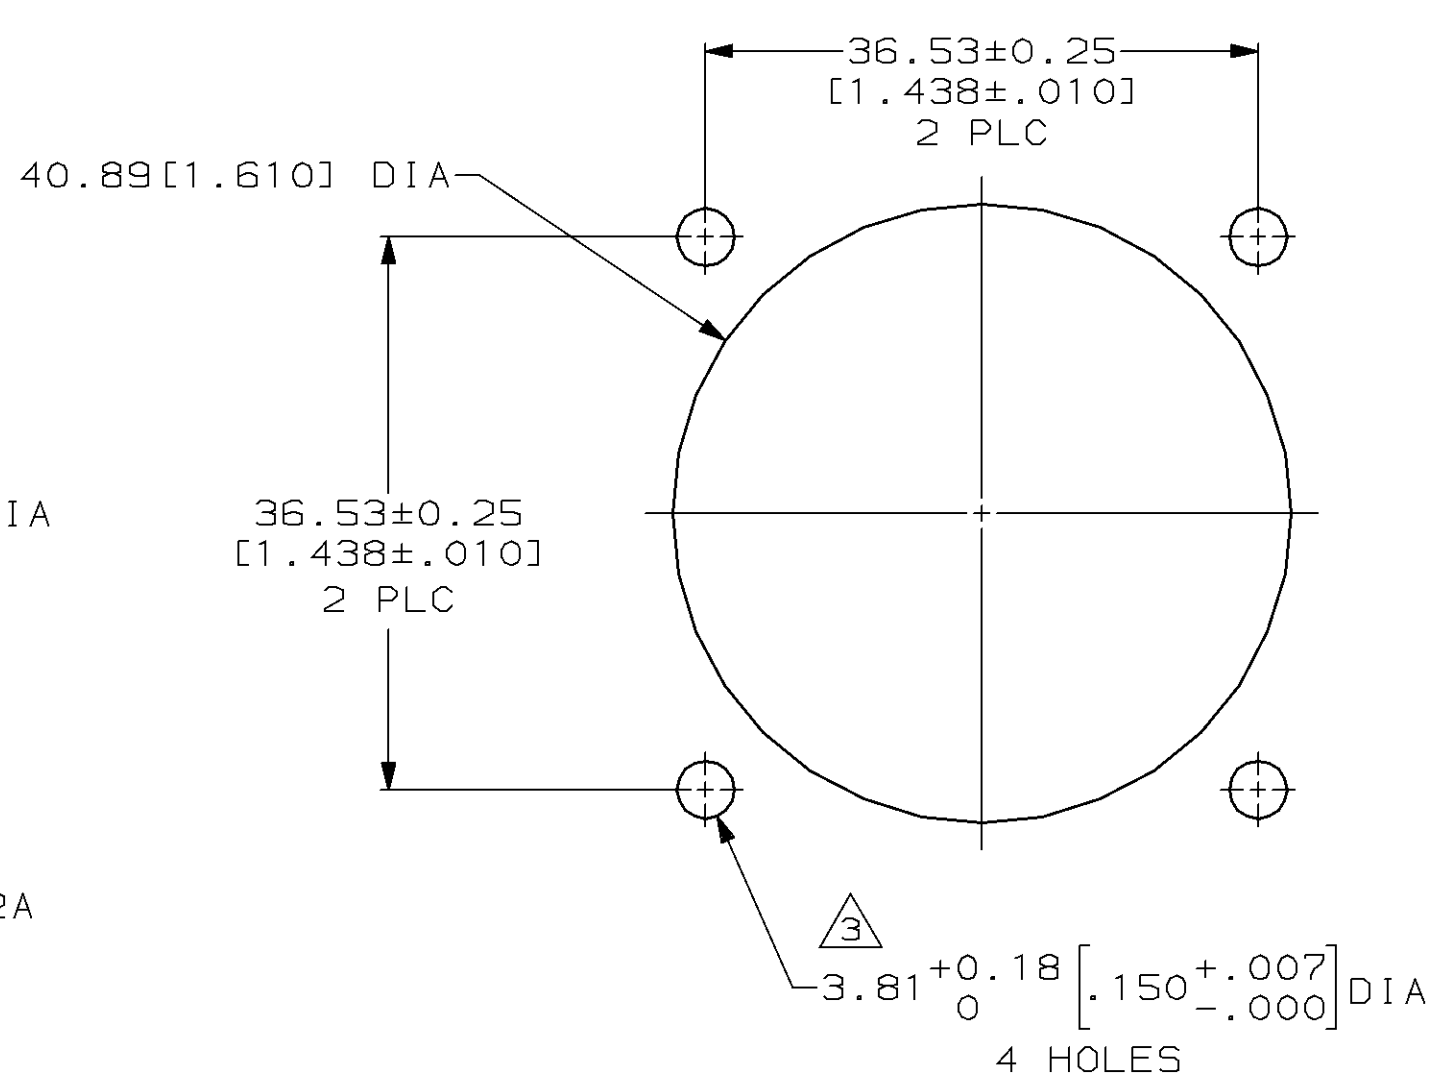
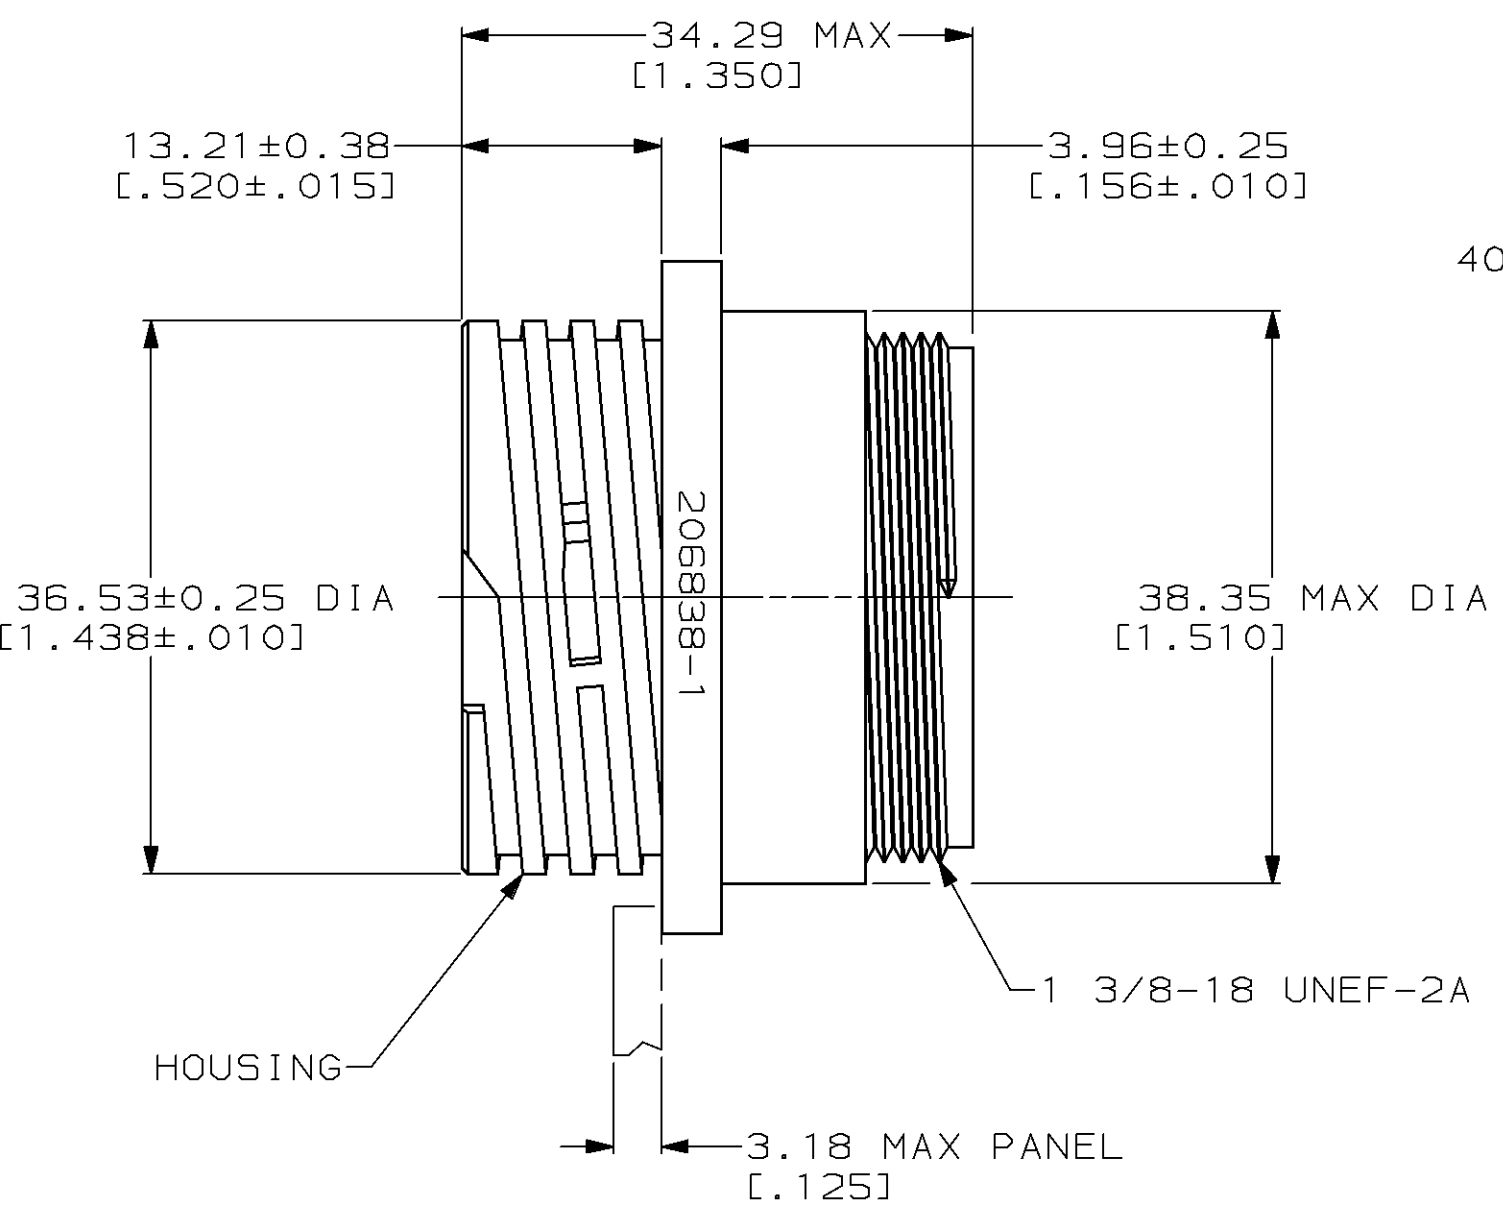
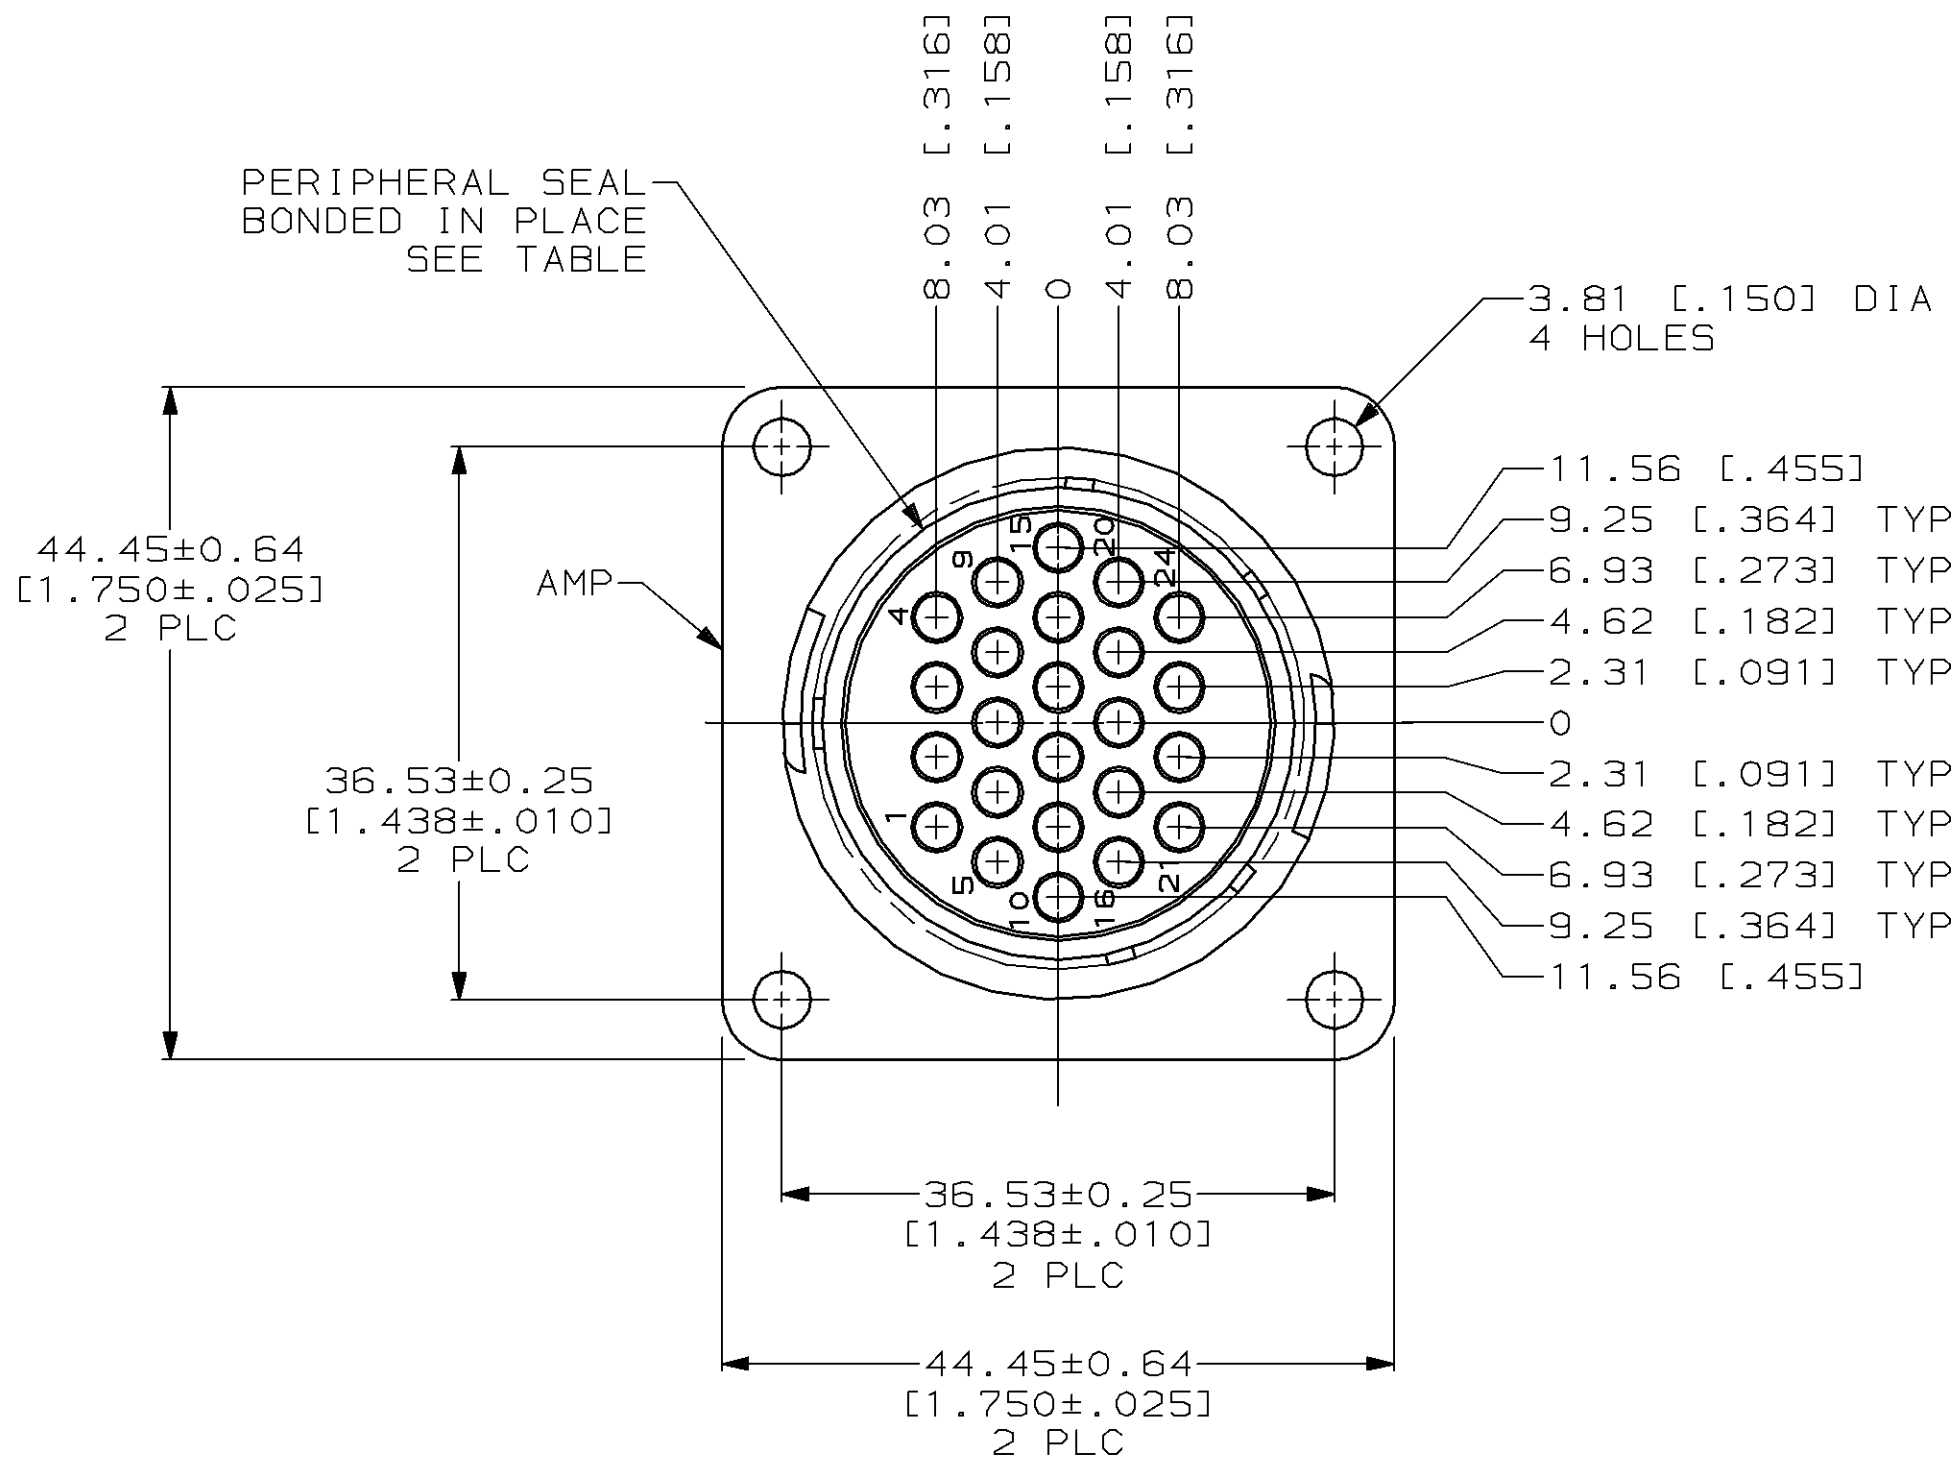


MOD	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
4	BD	35				H	REDRAWN ON CAD & ADDED -5 NPR 4832	07/08/93	-
						J	REACTIVATE -4 PER EC 0020-1075-94	12/05/94	AF

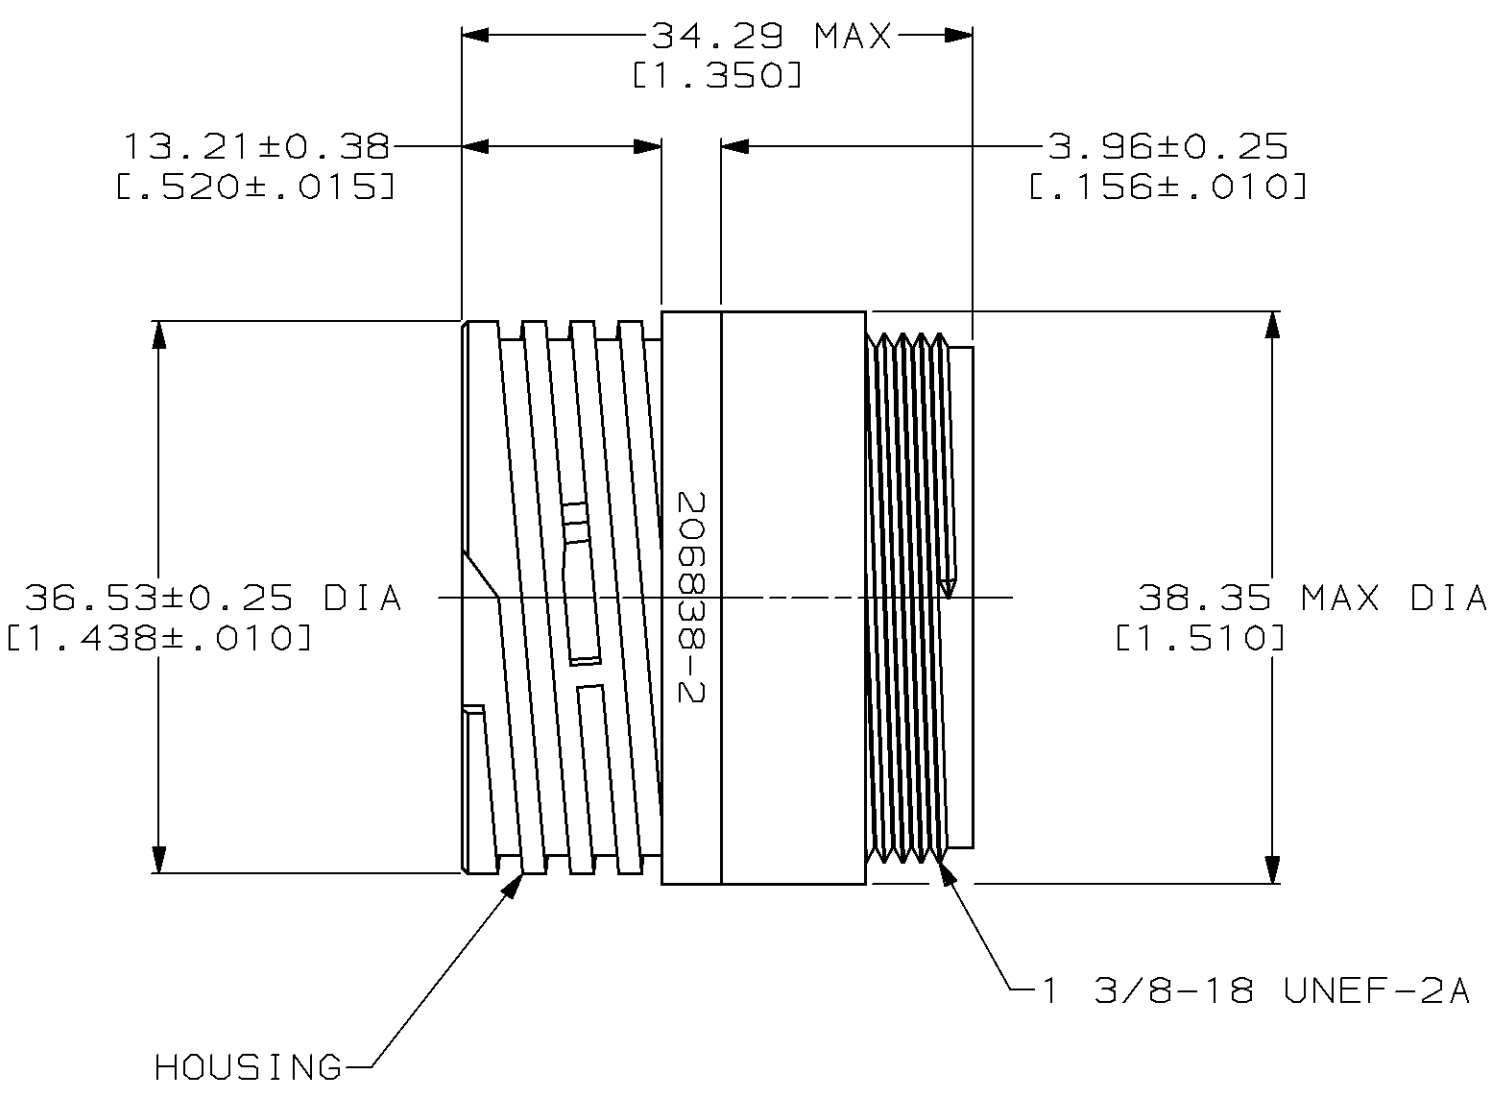

DETAIL A

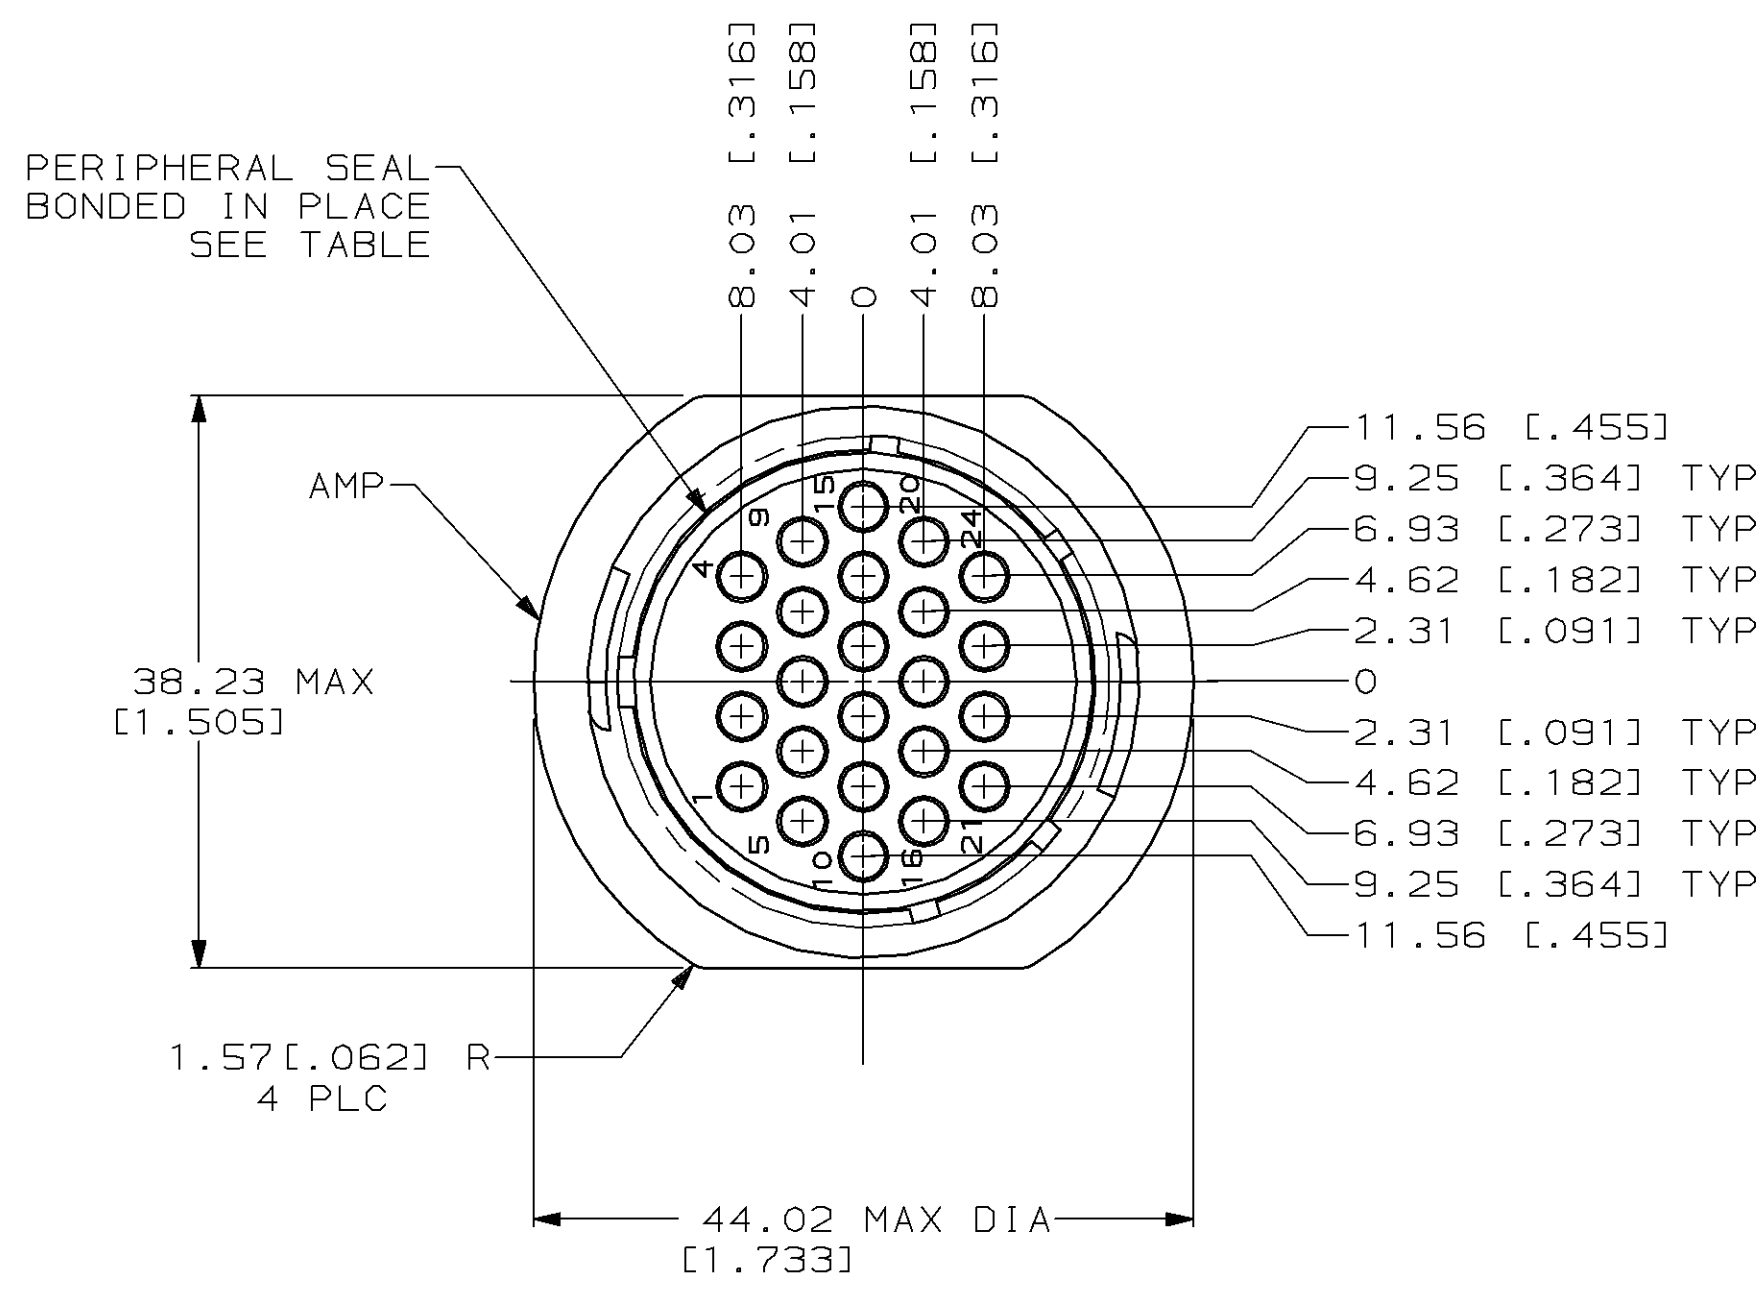

DETAIL B

1. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
2. WILL ACCEPT (24) MULTIMATE PIN CONTACTS.
3. NO 4 FASTENER RECOMMENDED FOR MOUNTING.
4. MAXIMUM INSULATION NOT TO EXCEED .150 DIA.

SMALL PACK	NO	A	206838-5
STANDARD	YES	B	206838-4
STANDARD	YES	A	206838-3
STANDARD	NO	B	206838-2
STANDARD	NO	A	206838-1
PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 [.005] 3 PLC DEC ± - ANGLES ± -	DR 10/29/92 D.6ELTZ CHK 08/11/93 R.STONE APPD 08/13/93 A.FRANTUM APPD 08/13/93 A.FRANTUM PRODUCT SPEC 108-10024	AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL HOUSING: NYLON, BLACK SEAL: ELASTOMER, GREY		NAME RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC		
FINISH -	APPLICATION SPEC - WEIGHT -	SIZE D	CAGE CODE 00779	DRAWING NO C-206838
		SCALE 2:1		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.