

OMI-SS-112L,300 ✓ ACTIVE

OEG | OEG Power PCB Relay OMI/OMIH


TE Internal #: 5-1440000-6

OEG Power PCB Relay OMI/OMIH, Power Relays, Standard,
Monostable, DC, 500 – 600mW Coil Power Rating Class, 540mW
Coil Power Rating DC

[View on TE.com >](#)



Relays, Contactors & Switches > Relays > Power Relays > STD OEG Miniature PCB OJT Power Relays

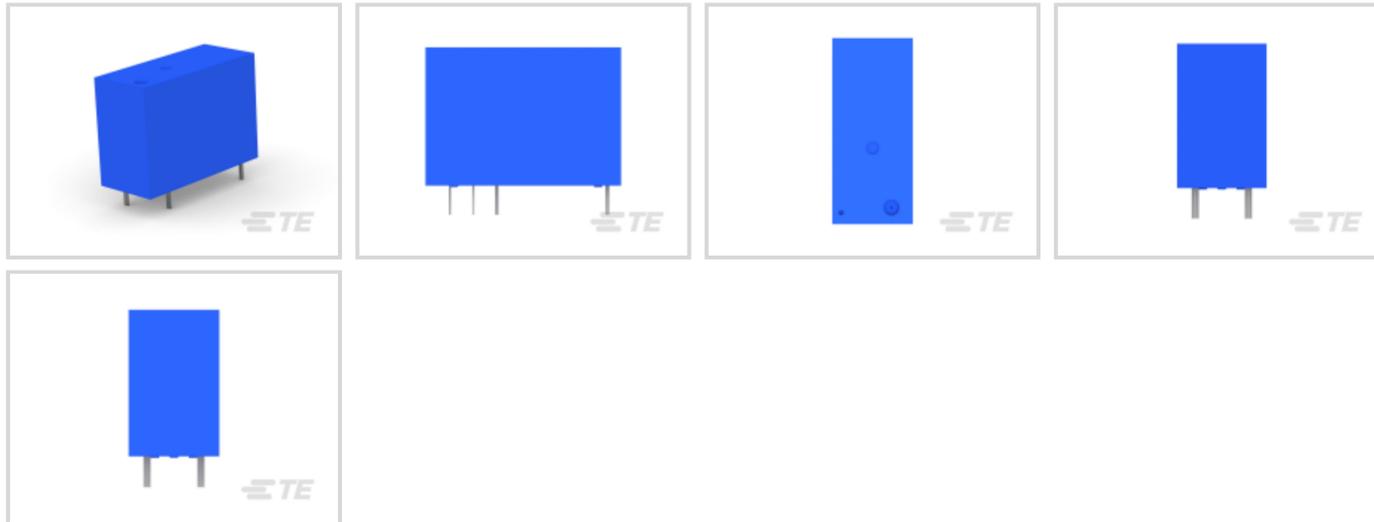

Power Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating Class: **500 – 600 mW**

Coil Power Rating DC: **540 mW**

Coil Resistance: **270 Ω**

[All STD OEG Miniature PCB OJT Power Relays \(109\)](#)

Features

Product Type Features

Power Relay Type	Standard
------------------	----------

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	4000 V
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	10 A
Contact Limiting Short-Time Current	10 A
Contact Limiting Continuous Current	10 A
Insulation Creepage Class	5.5 – 8 mm
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
Insulation Initial Resistance	1000 M Ω
Insulation Creepage Between Contact & Coil	8 mm [.315 in]
Contact Limiting Breaking Current	10 A
Coil Magnetic System	Monostable, DC



Coil Power Rating Class	500 – 600 mW
Coil Power Rating DC	540 mW
Coil Resistance	270 Ω
Coil Special Features	Sensitive Version, UL Coil Insulation Class A
Coil Voltage Rating	12 VDC
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	30 VDC
Contact Voltage Rating	250 VAC

Body Features

Insulation Special Features	10000V Initial Surge Withstand Voltage between Contacts & Coil
Product Weight	13 g [.459 oz]

Contact Features

Contact Arrangement	1 Form C (SPDT)
Contact Current Class	5 – 10 A, 16 A
Contact Current Rating (Max)	10 A
Contact Material	Ag Alloy
Contact Number of Poles	1
Terminal Type	PCB-THT

Mechanical Attachment

Relay Mounting Type	Printed Circuit Board
---------------------	-----------------------

Dimensions

Length Class (Mechanical)	25 – 30 mm
Insulation Clearance Class	5 – 8 mm
Height Class (Mechanical)	20 – 25 mm
Insulation Clearance Between Contact & Coil	5.5 mm [.217 in]
Width Class (Mechanical)	12 – 16 mm
Product Width	12.8 mm [.504 in]
Product Length	29.21 mm [1.15 in]
Product Height	20.6 mm [.811 in]

Usage Conditions

Environmental Ambient Temperature Class	50 – 70 $^{\circ}$ C
---	----------------------



Environmental Ambient Temperature (Max) 70 °C[158 °F]

Environmental Category of Protection RTII

Packaging Features

Packaging Method Tube

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Compliant with Exemptions

EU ELV Directive 2000/53/EC Not Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006
 Current ECHA Candidate List: JUN 2020 (209)
 Candidate List Declared Against: JAN 2020 (205)
 Does not contain REACH SVHC

Halogen Content Not Yet Reviewed for halogen content

Solder Process Capability Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # CAT-OE4-OM5
STD OEG Miniature PCB OJT Power Relays

Also in the Series | OEG Power PCB Relay OMI/OMIH



Power Relays(109)

Customers Also Bought



TE Part #5-2176400-3
3540 150R 1%



TE Part #1-2213819-0
6X6 ILL TACT SMT 100GF HI PURE GREEN



TE Part #1622790-1
LR2 1% 91K



TE Part #1721081-4
PCN 3A/5A SLIM PCB RELAY 3VDC



TE Part #3-1419128-2
STD OEG Miniature PCB OJ/OJE Pow Relays



TE Part #9-1440000-6
OMIT-SH-112LM,394



TE Part #1624133-1
23E 220KA 6X50PL B9 M10



TE Part #7-1623931-0
CFR25 5% 750K



TE Part #1977831-1
DIP SWITCH GDH02SATR04



TE Part #1622363-1
LR1 1% 1K74



Documents

Product Drawings

[OMI-SS-112L,300](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_5-1440000-6_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1440000-6_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-1440000-6_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[OMI OMIH Series Relay Data Sheet English](#)

English

Product Specifications

[Definitions Relays](#)

English

[OMI-SS-112L,000 300 Spec Sheet](#)

Japanese