

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利等知识产权外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.6

2






3

4

5

6

未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

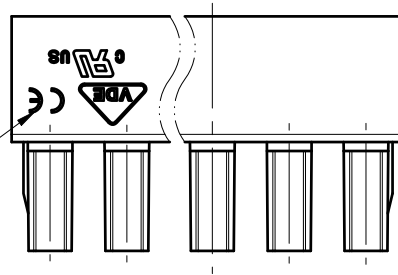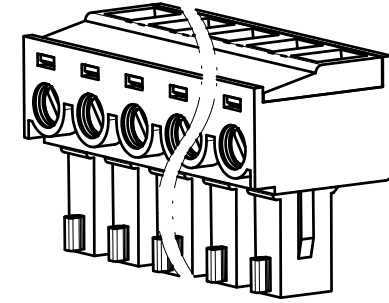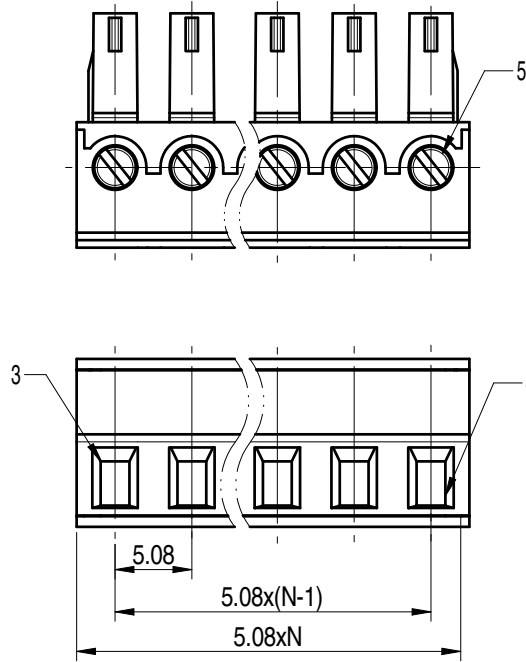


The certification mark is available on the left or right

5	Screw	Steel	M2/Zn Plated
4	Cage	Copper alloy	M2/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	300/8
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	450/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	4
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16/ 0.5~1.5		
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~12P		
剥线长度/Stripping length(mm)		6~7		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		/ 00		MAT STATUS: 批量	
APPD: 兰春华		2022.07.19		NAME	
CHKD: 龚耀志		2022.07.18		15EDGK-5.08-XXP-1Y-00L(H)	
DRFT: 周锡锦		2022.07.18		DRAWING NO.	
200097894		TYPE		DRAWING STATUS	
CUSTOMER DRAWING		已发布		SCALE	
2:1		SHEET		1/1	

00			周锡锦	2022.07.18
REV	ECN	DESCRIPTION	DRFT	DATE



1

2

3

4

5

6