

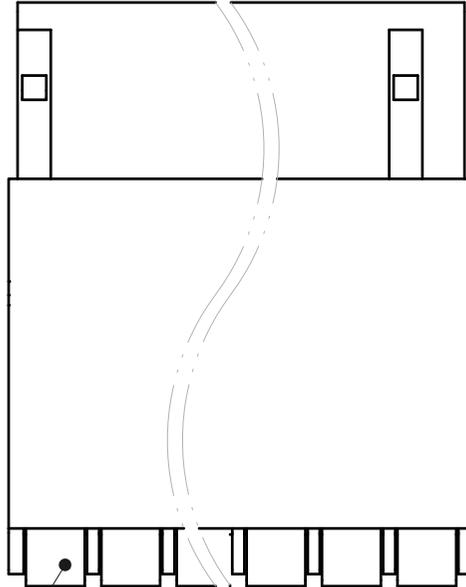
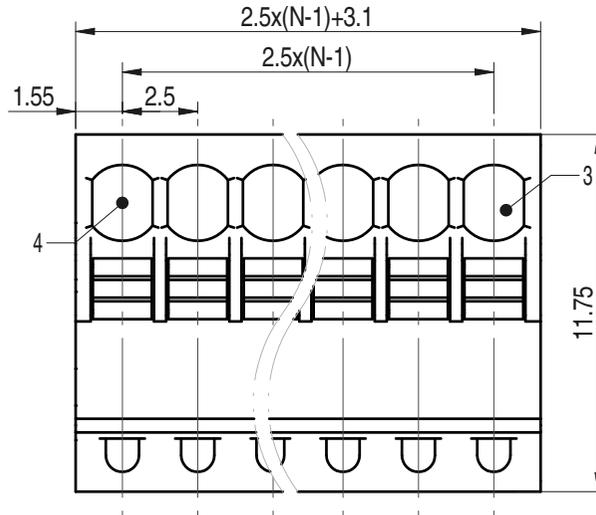


02P

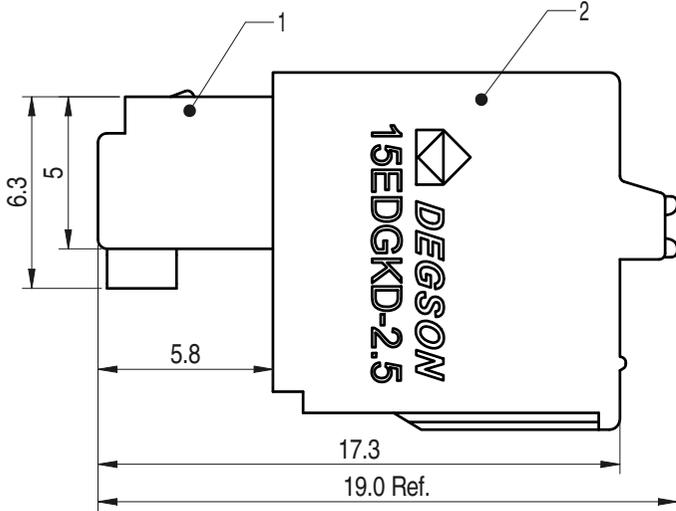

公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

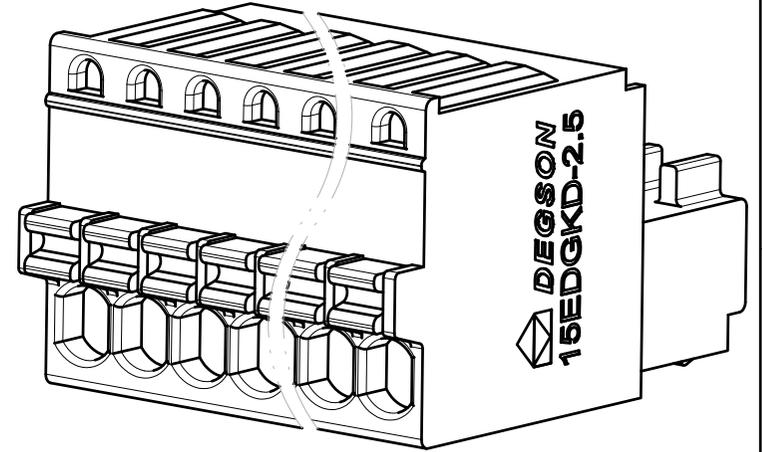

ITEM	NAME OF PART	MATERIAL	NOTES
5	Button	POM	UL94HB
4	Spring	Stainless steel	/
3	Clamp	Copper alloy	Sn Plated
2	Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	150/4	150/4	150/4
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)			/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~20/ 0.2~0.5		
间距/Pitch(mm)/线数范围/Poles	2.5/N=02~12P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



APPD: 兰春华	2022.10.17
CHKD: 龚耀志	2022.10.17
DRFT: 方哲盛	2022.10.17

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV:	/ 00	MAT STATUS:	
NAME			
15EDGKD-2.5-XXP-1Y-00L(H)			

REV	ECN	DESCRIPTION	DRFT	DATE
00			方哲盛	2022.10.17

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200097939	CUSTOMER DRAWING	已发布	4:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by the originator. All rights reserved for patent, utility model or design registrations. 除经书面明确授权外, 否则禁止转让、复制、引用、光碟等文件的传播。 未经书面明确授权, 擅自复制或传播文件, 侵犯专利权及设计权。 所有权利保留。