
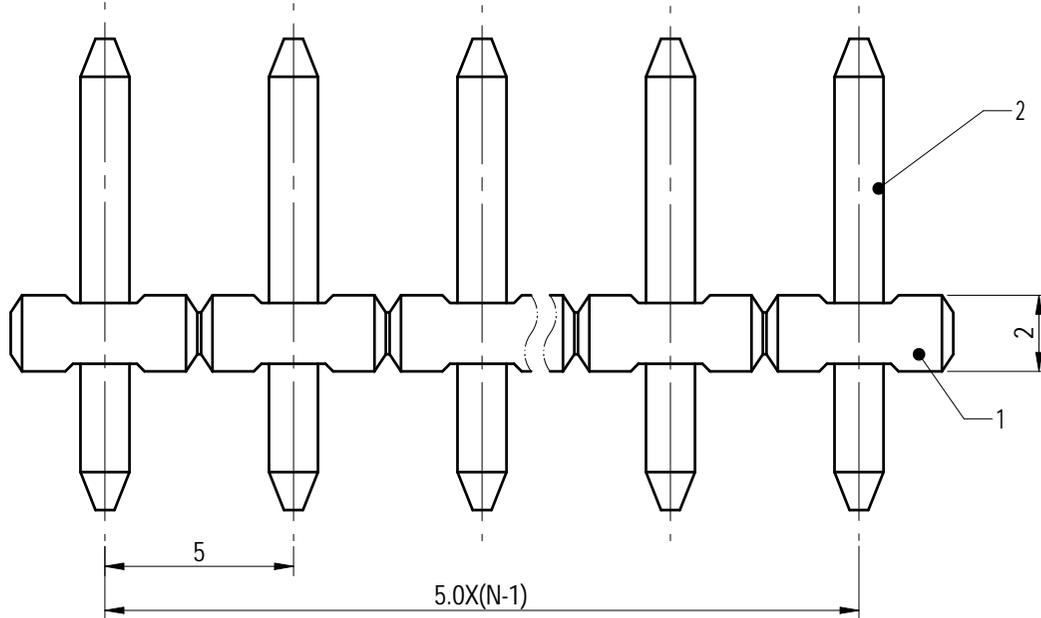
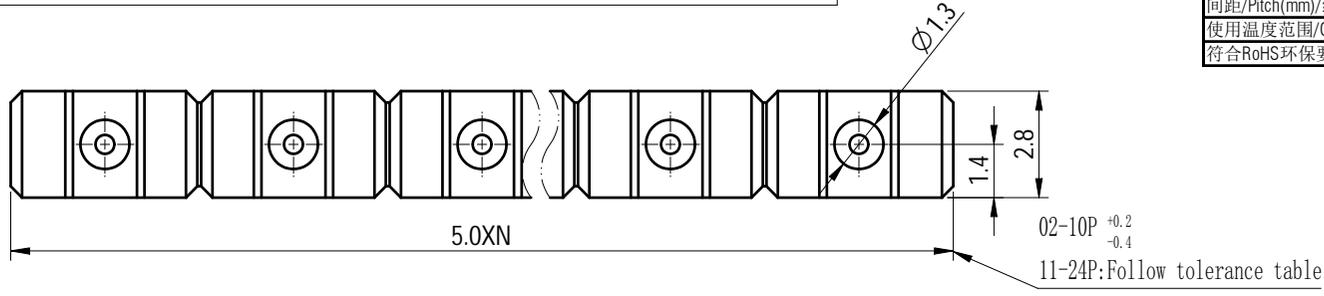


PCB LAYOUT

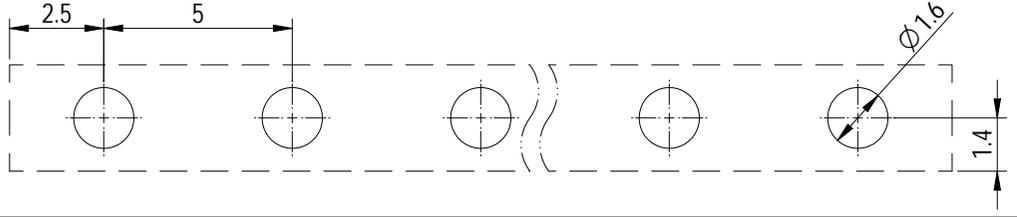

未注公差/General tolerances (mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL 标准/UL Standard:											B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)											300/10	/	300/10
IEC 标准/IEC Standard:													
过压类别/Overvoltage Category/污染等级/Pollution Degree											III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)											/	250/12	/
工频耐压/Withstanding voltage(V/1Min)											/	AC2000	/
间距/Pitch(mm)/线数范围/Poles											5.0/N=02~24P		
使用温度范围/Operating temperature(°C)											-40~+105		
符合RoHS环保要求/Conform to RoHS											Yes		

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV: /		MAT STATUS: 批量	
APPD: 兰春华	2023.03.29	NAME			
CHKD: 陈招	2023.03.29	DG332J-5.0-XXP-1Y-00L(H)			
DRFT: 龚徐涛	2023.03.29	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200027873	CUSTOMER DRAWING	work	5:1
				SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by the copyright holder. All rights reserved for patent. 除专利注明情况外，其他部分均按原样提供。未经许可，不得复制或传播。如有侵权，请联系本公司法务部处理。 02-10P: Follow tolerance table