


GPSU12-USB 12W USB charger interchangeable series DoE (VI) & EU ErP / CoC (5)

Plug-in power supply

Features:

- Universal input voltage
- Meet EISA 2007 / DoE (VI) & EU ErP / CoC (5)
- Single output
- Optional output connectors
- Short circuit protection
- Over voltage protection
- Over current protection
- Low leakage current <0.25mA
- One year limited warranty

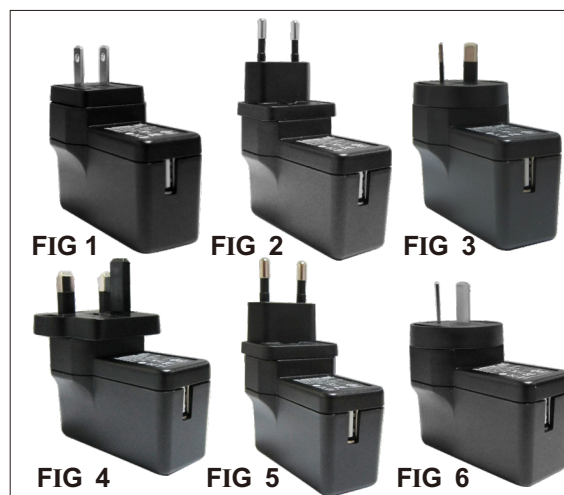

SAFETY AGENCY APPROVALS



Specifications:	GPSU12 Series:
Input voltage	100 ~ 240 VAC
Input frequency	47 ~ 63Hz
Input current	0.5A Max.
Leakage current	0.25mA Max. @ 240 VAC / 50Hz
Output voltage	See rating chart
Output current	See rating chart
Output power range	See rating chart
Ripple	See rating chart
Over voltage protection	Yes. Protected by Zener diode. Reted output voltage 110~140%
Over current protection	Yes. Hiccup mode; Auto-recovery. Rated output current >110%
Short circuit protection	Yes. Hiccup mode; Auto-recovery
Temperature coefficient	All output $\pm 0.04\%/^{\circ}\text{C}$ maximum
Transient response	Maximum excursion of 4% or better on all models. Recovering to 1% of final value within 500uS after a 25% step load change
Operating temperature	0°C~+40°C. See derating curve
Storage temperature	-40°C~+85°C
Relative humidity	5% to 95% non-condensing
Derating	Derated from 100% at +40°C linearly to 70% at 50°C
Avg.Efficiency	See rating chart
Setup / Hold up / Rise time	Typical : 3000mS / 10mS / 50mS at full load.
Line regulation	$\pm 1\%$ maximum for any input voltage change between input voltage range
Load regulation	$\pm 5\%$ variations from minimum to maximum output current .
Insulation resistance	50Mohm minimum from input to output
Inrush current	30 AMPS @ 115 VAC ; 60 AMPS @ 230 VAC at 25°C cold start
Withstand voltage	4242VDC from input to output
Mean time between failure	100,000 hours minimum at full load at 25°C ambient
EMC	(A)CE : Emission : EN55022 ; EN61000-3-2,3 / Immunity: IEC61000-4-2,3,4,5,6,11 (B)FCC 47 CFR Part 15 Subpart B.
Safety	(A) UL60950-1 ; CSA C22.2 (B)EN60950-1 (C)IEC60950-1 (D)J60950-1
Warranty	1 year

GPSU12-USB 12W USB charger interchangeable series DoE (VI) & EU ErP / CoC (5)

FIG 1(UL)

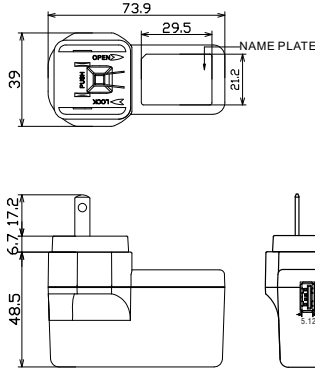


FIG 3(SA)

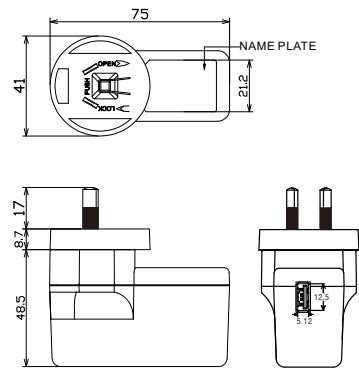


FIG 4(UK)

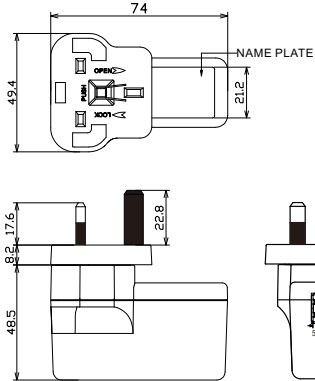


FIG 5(KR)




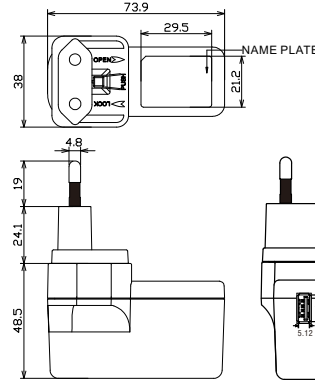


FIG 6(AR)

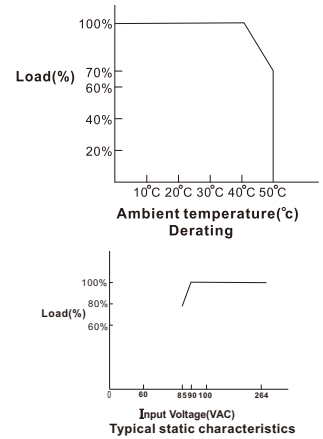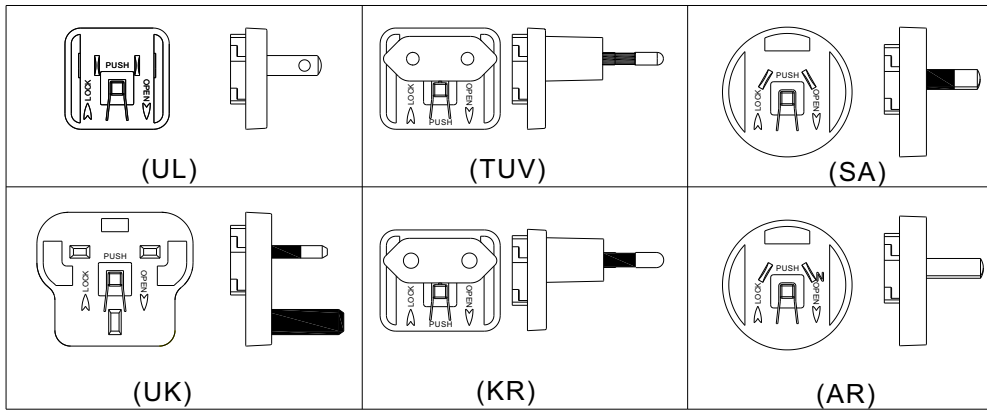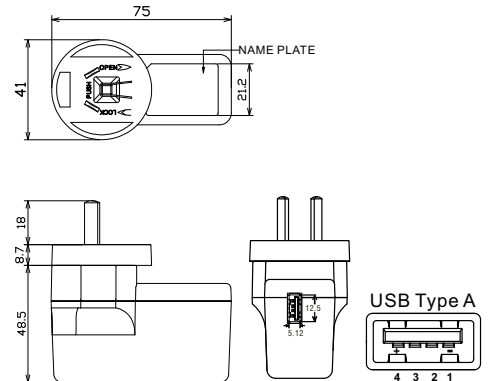

X= UI: (American type_FIG 1) or **SAI:** (2pin Australian type_FIG3) or **BSI:** (UK type_FIG 4) or **KRI:** (Korea type_FIG 5) or **ARI:** (Argentina type_FIG 6)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%)		No load Power Consumption(W)	Measured at the output of
							DoE (VI)	CoC (5)		
GPSU12X-1-USB	5~6	2.40~2.00	12	100	±1	±5	>79.94	>80.30	<0.075	5
GPSU12X-1-1-USB	6~8	2.00~1.50	12	100	±1	±5	>83.1	>83.26	<0.075	7.5
GPSU12X-2-USB	8~11	1.50~1.10	12.10	100	±1	±5	>83.1	>83.40	<0.075	9
GPSU12X-3-USB	11~13	1.10~0.93	12.10	100	±1	±3	>83.1	>83.40	<0.075	12
GPSU12X-4-USB	13~16	0.93~0.75	12.09	100	±1	±3	>83.1	>83.40	<0.075	15
GPSU12X-5-USB	16~21	0.75~0.58	12.18	100	±1	±3	>83.1	>83.40	<0.075	18
GPSU12X-6-USB	21~27	0.58~0.45	12.18	100	±1	±2	>83.1	>83.40	<0.075	24
GPSU12X-7-USB	27~33	0.45~0.37	12.15	100	±1	±2	>83.1	>83.40	<0.075	28
GPSU12X-8-USB	33~48	0.37~0.25	12.21	100	±1	±2	>83.1	>83.40	<0.075	48

EI: (European type_FIG 2)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%)		No load Power Consumption(W)	Measured at the output of
							DoE (VI)	CoC (5)		
GPSU12EI-1-USB	5~6	2.40~2.00	12	100	±1	±5	>79.94	>80.30	<0.075	5

Note:

- 1.Weight: Approx 70~90gs
- 2.Avg. Eff. (%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.
- 3.Standard Output cable: 5~8V: UL2468, 18AWG, 1 M
8~11V: UL2468, 22AWG, 4 FT
11~48V: UL 2468, 24AWG, 6 FT