




MINIATURE 5 VDC OUTPUT DIGITALLY CORRECTED FLATPACK PRESSURE TRANSDUCER

LLE-5DC-500 SERIES

- Wind Tunnel, Flight Test
- 5 VDC Output
- Moisture Protected
- High Accuracy Digital Correction
- Patented Leadless Technology **VIS**[®]

The LLE-5DC-500 series transducers are an excellent solution for Wind Tunnel and Flight Test pressure measurement applications. Their light weight and flat packaging makes them especially suitable for direct adherence to test parts where other means of pressure installation are undesirable or not possible. These transducers incorporate the latest Kulite patented technologies in pressure sensor development. The Digitally Corrected output of these transducers enables them to have accuracies down to .25% FS over a fairly wide temperature range.

Part performance not guaranteed if used in water.

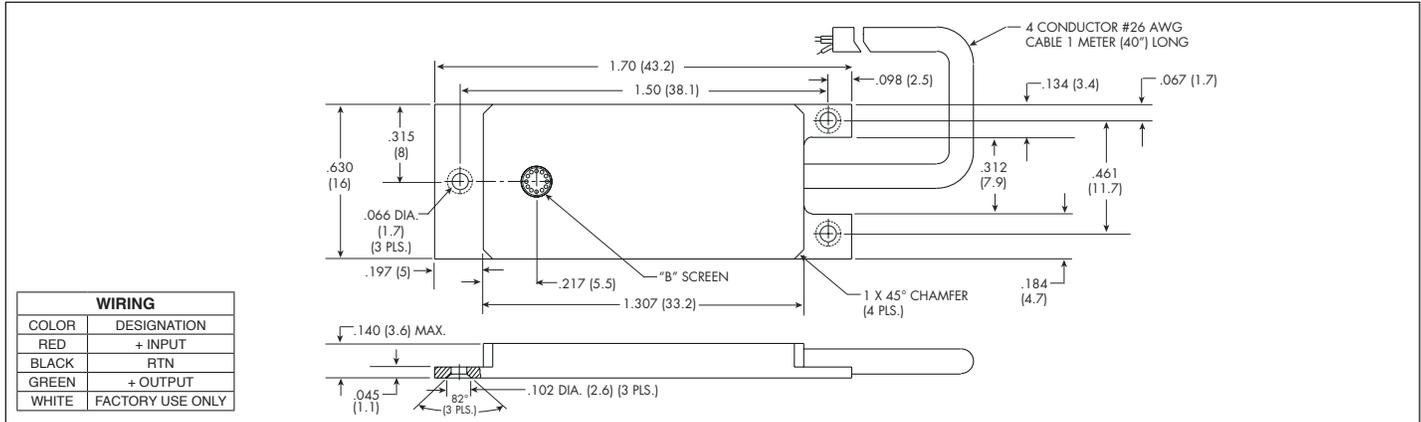

INPUT	Pressure Range	1.7 25	3.5 50	7 100	17 250	35 BAR 500 PSI
	Operational Mode	Absolute, Sealed Gage				
	Over Pressure	2 Times Rated Pressure Range				
	Burst Pressure	3 Times Rated Pressure Range				
	Pressure Media	Most Conductive Liquids and Gases - Please Consult Factory				
	Rated Electrical Excitation	12 ± 4 VDC or 28 ± 4 VDC				
	Maximum Electrical Current	25 mA				
OUTPUT	Output Impedance	200 Ohms (Typ.)				
	Full Scale Output (FSO)	5 V				
	Residual Unbalance	0.5 VDC				
	Total Error Band	± 0.25% (Typ.) <i>(End Point Settings, Combined Non-Linearity, Hysteresis, Repeatability And All Thermal Effects Included)</i>				
	Resolution	Infinitesimal				
	Frequency Response	DC to 2500 Hz				
	Acceleration Sensitivity % FS/g Perpendicular	5.0x10 ⁻⁴	3.0x10 ⁻⁴	1.5x10 ⁻⁴	1.0x10 ⁻⁴	6.0x10 ⁻⁵
ENVIRONMENTAL	Insulation Resistance	100 Megohm Min. @ 50 VDC				
	Operating Temperature Range	-40°F to +280°F (-40°C to +140°C)				
	Compensated Temperature Range	-40°F to +250°F (-40°C to +120°C) Other Ranges Quoted on Request				
	Linear Vibration	20g Peak, Sine 10 to 2000 Hz				
PHYSICAL	Mechanical Shock	20g Half Sine Wave 11 msec. Duration				
	Electrical Connection	4 Conductor 26 AWG Cable 1 Meter (40") Long				
	Weight	4.5 Grams (Nom.) Excluding Cable				
Sensing Principle		Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology				

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (F) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2014 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.