

(2,00 mm) .0787"

MMT-107-01-L-MT

MMT-120-02-L-SH

MMT-130-02-L-DH

MMT SERIES

HORIZONTAL SURFACE MOUNT HEADER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com/MMT

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,10 mm) .004" max (02-25)

(0,15 mm) .006" max (26-36)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- Alignment pins
 - Locking clips
 - Molded pick & place pads
 - Other platings
- Contact Samtec.

TAPE & REEL AVAILABILITY


No tooling charges.
Minimum order is the lesser of a full reel quantity or 125 pieces.
Order any quantity above minimum.
In-house design, manufacture.
Quick turn-around.
Call Samtec for specifications and ordering information.

Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with:
CLT, SQT, SQW, ESQT,
TLE, SMM, MMS, TCSD

Available with
optional
Pick & Place Pads

APPLICATIONS

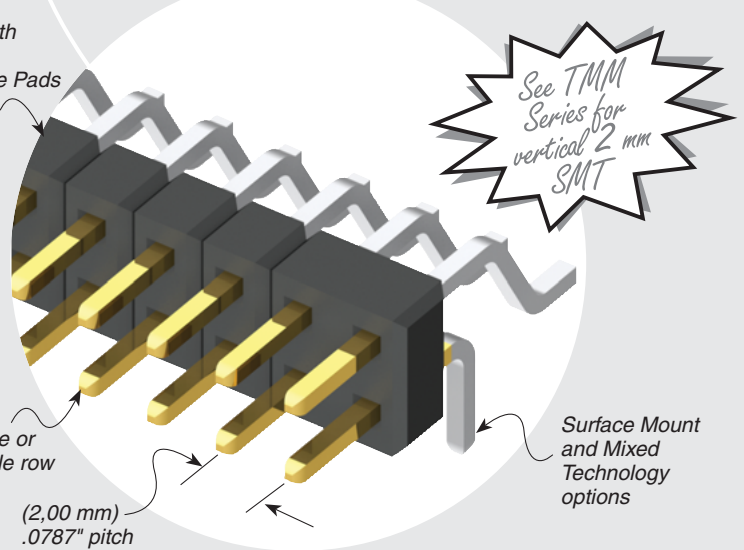

See TMM Series for vertical 2 mm SMT

Single or double row

(2,00 mm) .0787" pitch

Surface Mount and Mixed Technology options

