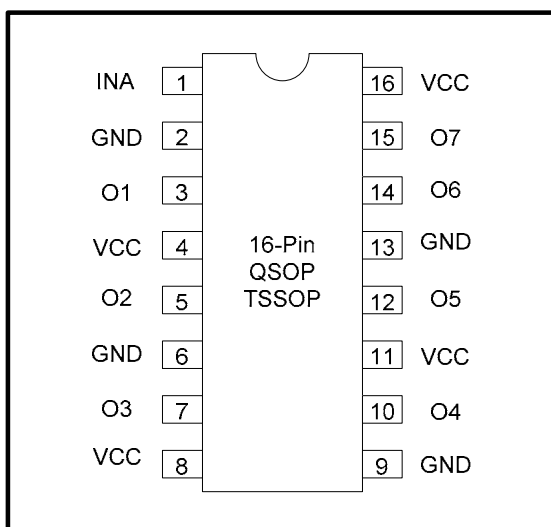
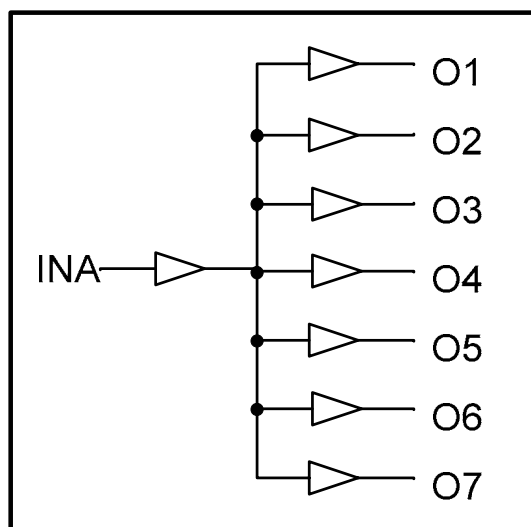


**500MHz TTL/CMOS Potato Chip**

FEATURES:	DESCRIPTION:
. Operating frequency up to 500MHz with 2pf load . Operating frequency up to 400MHz with 5pf load . Operating frequency up to 230MHz with 15pf load . Operating frequency up to 85MHz with 50pf load . Very low output pin to pin skew < 250ps . Very low pulse skew < 200ps . VCC = 1.2V to 3.6V . Propagation delay < 2.3ns max with 15pf load . Low input capacitance: 3pf typical . 1:7 fanout . Available in 16pin 150mil wide QSOP package . Available in 16pin 173mil wide TSSOP package	Potato Semiconductor's PO49FCT32803G is designed for world top performance using submicron CMOS technology to achieve 500MHz output frequency with less than 250ps output skew. PO49FCT32803G is a 3.3V CMOS 1 input to 7 Output Buffered Driver with integrated series damping resistors on all outputs to match 50 ohm transmission line impedance. Typical applications are clock and signal distribution.

Pin Configuration**Logic Block Diagram****Pin Description**

Pin Name	Description
INA	Input
O1 to O7	Outputs

**500MHz TTL/CMOS Potato Chip****Maximum Ratings**

Description	Max	Unit
Storage Temperature	-65 to 150	°C
Operation Temperature	-40 to 85	°C
Operation Voltage	-0.5 to +4.6	V
Input Voltage	-0.5 to V _{cc} +0.5	V
Output Voltage	-0.5 to V _{cc} +0.5	V

Note:

stresses greater than listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability specification is not implied.

DC Electrical Characteristics

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
V_{OH}	Output High voltage	V _{cc} =3V Vin=V _{IH} or V _{IL} , I _{OH} = -8mA	2.4	3	-	V
V_{OL}	Output Low voltage	V _{cc} =3V Vin=V _{IH} or V _{IL} , I _{OH} =12mA	-	0.4	0.5	V
V_{IH}	Input High voltage	Guaranteed Logic HIGH Level (Input Pin)	2	-	V_{cc}	V
V_{IL}	Input Low voltage	Guaranteed Logic LOW Level (Input Pin)	-0.5	-	0.8	V
I_{IH}	Input High current	V _{cc} = 3.6V and Vin = 3.6V	-	-	1	uA
I_{IL}	Input Low current	V _{cc} = 3.6V and Vin = 0V	-	-	-1	uA
V_{IK}	Clamp diode voltage	V _{cc} = Min. And I _{IN} = -18mA	-	-0.7	-1.2	V
R_s	Series Resistor			22		Ω

Notes:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at V_{cc} = 3.3V, 25 °C ambient.
3. This parameter is guaranteed but not tested.
4. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
5. V_{OH} = V_{cc} - 0.6V at rated current

**500MHz TTL/CMOS Potato Chip****Power Supply Characteristics**

Symbol	Description	Test Conditions (1)	Min	Typ	Max	Unit
IccQ	Quiescent Power Supply Current	Vcc=Max, Vin=Vcc or GND	-	0.1	30	uA

Notes:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at Vcc = 3.3V, 25°C ambient.
3. This parameter is guaranteed but not tested.
4. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.

Capacitance

Parameters (1)	Description	Test Conditions	Typ	Max	Unit
Cin	Input Capacitance	Vin = 0V	3	4	pF
Cout	Output Capacitance	Vout = 0V	-	6	pF

Notes:

- 1 This parameter is determined by device characterization but not production tested.

Switching Characteristics

Symbol	Description	Test Conditions (1)	Max	Unit
tPLH	Propagation Delay A to Bn	CL = 15pF	2.3	ns
tPHL	Propagation Delay A to Bn	CL = 15pF	2.3	ns
tr/tf	Rise/Fall Time	0.8V – 2.0V	1	ns
tsk(p)	Pulse Skew (Same Package)	CL = 15pF	0.2	ns
tsk(o)	Output Pin to Pin Skew (Same Package)	CL = 15pF	0.25	ns
tsk(pp)	Output Skew (Different Package)	CL = 15pF	0.4	ns
fmax	Input Frequency	CL = 50pF	85	MHz
fmax	Input Frequency	CL = 15pF	230	MHz
fmax	Input Frequency	CL = 5pF	400	MHz
fmax	Input Frequency	CL = 2pF	500	MHz


Notes:

1. See test circuits and waveforms.
2. tPLH, tPHL, tsk(p), and tsk(o) are production tested. All other parameters guaranteed but not production tested.
3. Airflow of 1m/s is recommended for frequencies above 133MHz




500MHz TTL/CMOS Potato Chip

Test Waveforms

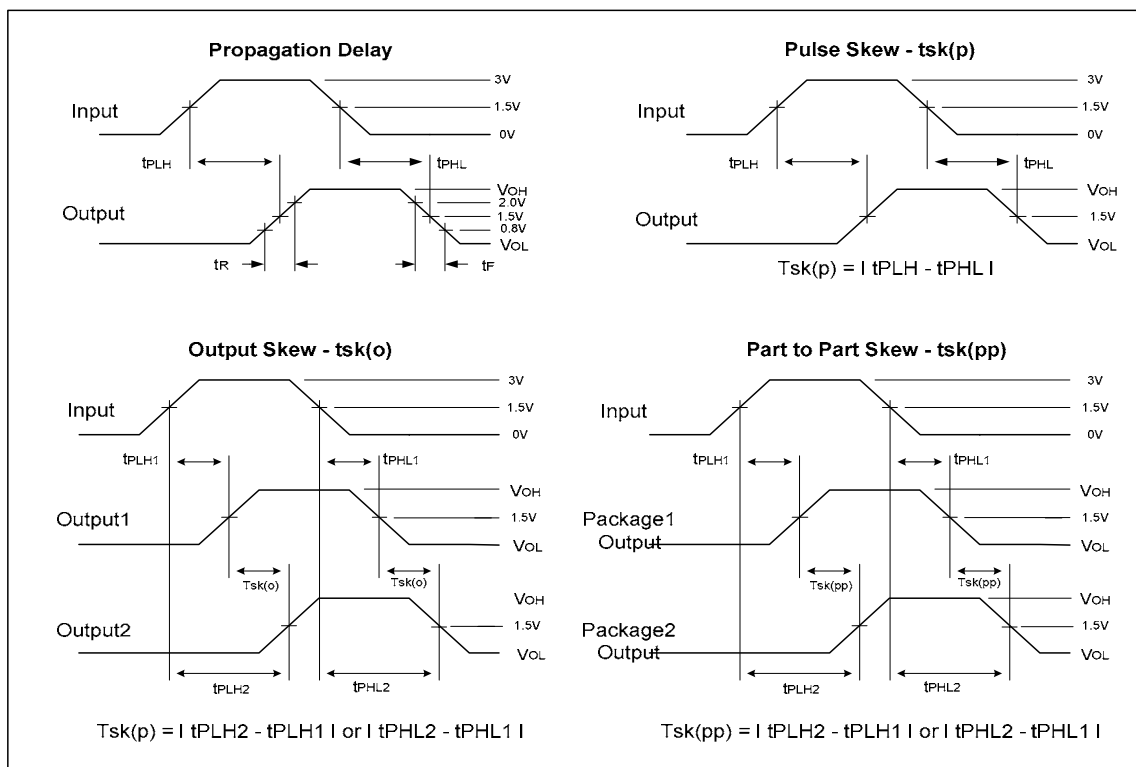


Test Circuit

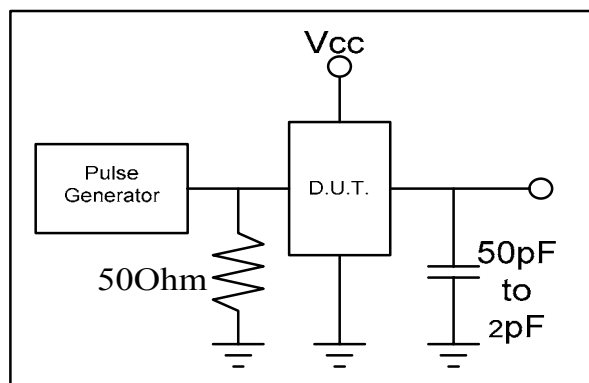




500MHz TTL/CMOS Potato Chip

Packaging Mechanical Drawing: 16 pin QSOP

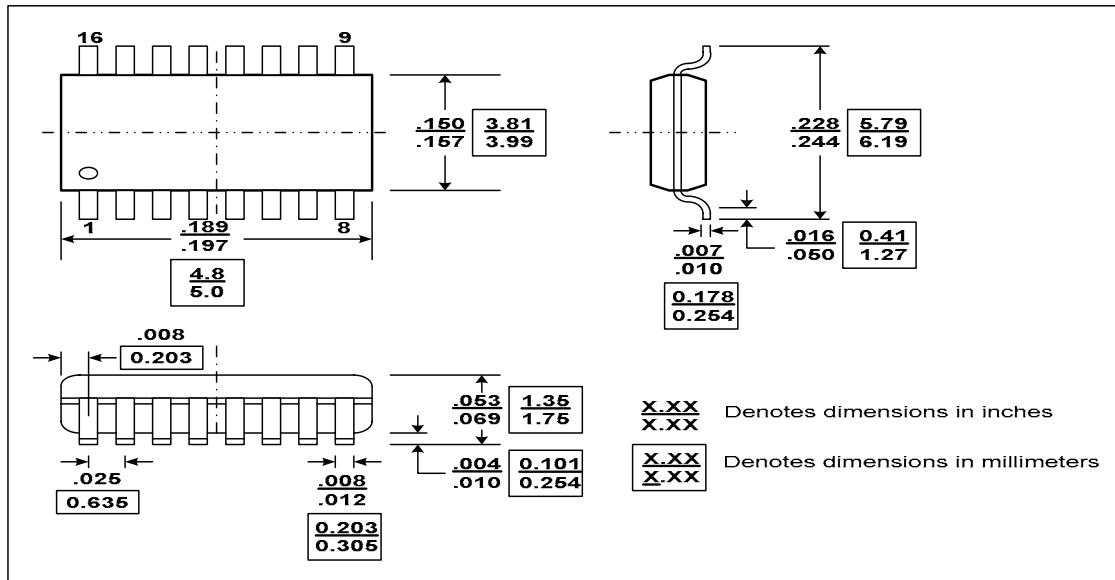

Packaging Mechanical Drawing: 16 pin TSSOP

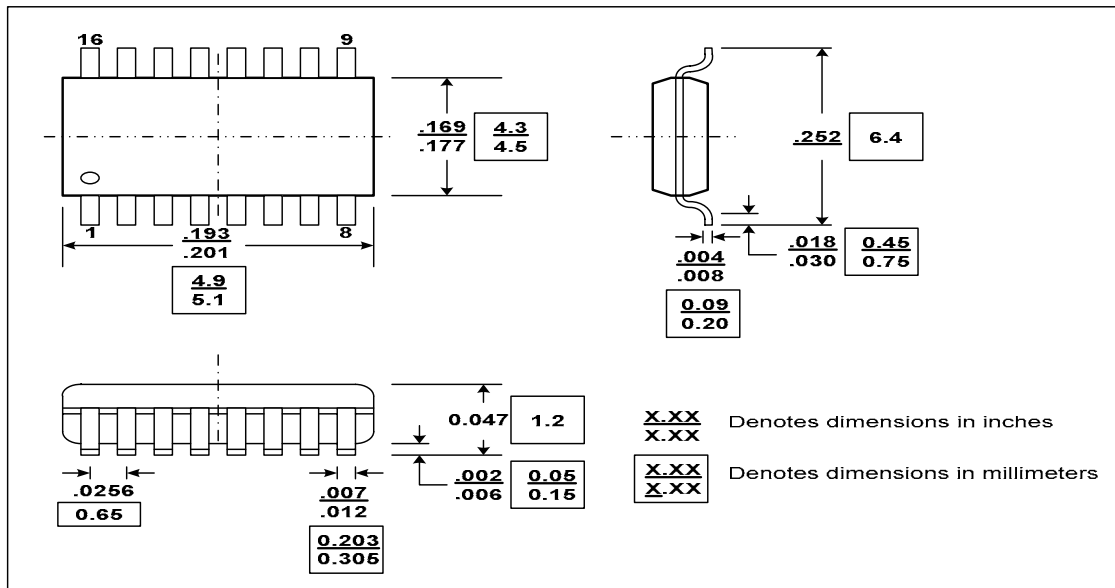

**500MHz TTL/CMOS Potato Chip****IC Ordering Information**

Ordering Code	Package		Top-Marking	T _A
PO49FCT32803GQU for Tube	16-pin 150mil QSOP	Pb-free & Green	PO49FCT32803GQ	-40°C to 85°C
PO49FCT32803GQR for Tape & Reel	16-pin 150mil QSOP	Pb-free & Green	PO49FCT32803GQ	-40°C to 85°C
PO49FCT32803GTU for Tube	16-pin 173mil TSSOP	Pb-free & Green	PO49FCT32803GT	-40°C to 85°C
PO49FCT32803GTR for Tape & Reel	16-pin 173mil TSSOP	Pb-free & Green	PO49FCT32803GT	-40°C to 85°C

IC Package Information

PACKAGE CODE	PACKAGE TYPE	TAPE WIDTH (mm)	TAPE PITCH (mm)	TAPE & REEL PIN 1 LOCATION	TAPE TRAILER LENGTH	QTY PER TAPE	TAPE LEADER LENGTH	QTY PER TUBE
Q	16pin 150mil QSOP	12	8	Top Left Corner	39 (12")	3000	64 (20")	97
T	16pin 173mil TSSOP	12	8	Top Left Corner	39 (12")	3000	64 (20")	96