



Your Power Safeguard™
您的电路安全卫士



H3FE 315A-1250A

Class of operation: aR

保护特性: aR

Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL248-13

INTERRUPTING CAPACITY/ 分断能力:

150,000 amperes at 1000V AC (315A-1250A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录 编号	额定电流 Rated Current	额定电压 Rated Voltage	功耗 Watts Loss (W)	SAFETY APPROVALS 安全认证
				CCC
H3FE315A	315A	1000V AC	91	○
H3FE350A	350A		96	○
H3FE400A	400A		106	○
H3FE450A	450A		110	○
H3FE500A	500A		114	○
H3FE550A	550A		120	○
H3FE630A	630A		126	○
H3FE700A	700A		132	○
H3FE800A	800A		140	○
H3FE900A	900A		150	○
H3FE1000A	1000A		156	○
H3FE1100A	1100A		162	○
H3FE1250A	1250A		176	○

● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

● 表示已取得安全认证
○ 表示正在申请安全认证

目录编号 Part No.

可选配件 Optional Accessory

微动开关 Microswitches

H3FE(amp rating)A

HMC-01

目录编号 Part No.

额定电流
Rated Current (A)

L (mm)


H3FE(amp rating)A

500-1100
1250

75
95

Dimensions/ 尺寸:

Unit 单位: mm

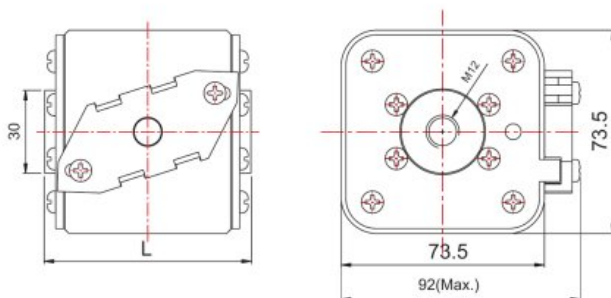

H3FE 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

